BKT

GROWING TOGETHER

TECHNICAL DATABOOK 2020



AGRICULTURAL TIRES

OFF-HIGHWAY TIRE SOLUTIONS

GROWING TOGETHER

2020 Technical DataBook

AGRICULTURAL TIRES

Range

TRACTOR

Radial Bias



AGRIMAX V-FLECTO

Pag. 34



AGRIMAX FORCE

Pag. 40



AGRIMAX FORTIS

Pag. 50



RT 853

Pag. 128



RT 857

Pag. 130



RIDEMAX IT 696

Pag. 134



AGRIMAX SIRIO

Pag. 54



AGRIMAX RT 657

Pag. 56



AGRIMAX RT 765

Pag. 64



RIDEMAX IT 697 (M+S)

Pag. 138



TR 118

Pag. 140



TR 126

Pag. 142



AGRIMAX RT 855

Pag. 90



AGRIMAX SPARGO

Pag. 112



AGRIMAX RT 945

Pag. 114



TR 128

Pag. 144



TR 133

Pag. 146



TR 135

Pag. 148



AGRIMAX RT 955

Pag. 120



AGRIMAX ELOS

Pag. 126



RT 851

Pag. 128



TR 136

Pag. 182



TR 144

Pag. 186



TR 145

Pag. 190

Range

TRACTOR

Radial Bias



TR 171

Pag. 192



TR 173

Pag. 204



FARM 2000

Pag. 206



PUDDLE SPECIAL (B)

Pag. 238



TR 393

Pag. 240



TR 459

Pag. 242



FARM 2000 PLUS

Pag. 212



FARM SPECIAL

Pag. 214



AS 2001

Pag. 218



TR 461

Pag. 248



TR 463

Pag. 250



TR 318

Pag. 250



TRAC FARM

Pag. 220



TRAC FARM PLUS

Pag. 222



COMMANDER (R)

Pag. 224



TRAC SUPER

Pag. 252



AT 316

Pag. 252



SNOW RIDE (A)

Pag. 254



TR 270

Pag. 228



TR 273

Pag. 234



PUDDLE SPECIAL (A)

Pag. 238

Range

HARVESTER

Radial Bias



AGRIMAX TERIS

Pag. 258



AGRIMAX RT 600

Pag. 264



STAR TRAC

Pag. 268



HARVESTER SPECIAL

Pag. 268



TR 137

Pag. 270



TR 360

Pag. 272



TR 882

Pag. 274



FLOTATION 558

Pag. 278



BK 308

Pag. 284

PIVOT IRRIGATOR

Radial Bias



TR 117

Pag. 288



TR 118

Pag. 292



AGRIMAX RI 818

Pag. 292

Range

FLOTATION

Radial Bias



RIDEMAX FL 699

Pag. 296



V-FLEXA

Pag. 298



FL 633 PERFORMA

Pag. 300



FLOTATION 647

Pag. 336



FLOTATION 648

Pag. 338



FLOTATION 648 T

Pag. 366



RIDEMAX FL 690

Pag. 302



RIDEMAX FL 693 M

Pag. 304



FL 630 SUPER

Pag. 312



FLOTATION TR 675

Pag. 368



FLOTATION TR 678

Pag. 372



FLOTATION RIB 774

Pag. 374



FL 630 ULTRA

Pag. 318



FL 635

Pag. 322



FL 637

Pag. 324



FL 639

Pag. 326



FLOTATION 351

Pag. 328



FLOTATION 558

Pag. 330

Range

FORESTRY

Bias



FORESTECH

Pag. 378



FS 216

Pag. 380



F 240

Pag. 386



TR 678

Pag. 388

MULTIUSE

Radial Bias



MULTIMAX MP 513

Pag. 394



MULTIMAX MP 515

Pag. 396



MULTIMAX MP 519

Pag. 396



MULTIMAX MP 522

Pag. 398



MULTIMAX MP 527

Pag. 402



MULTIMAX MP 540

Pag. 406



RT 747 AGRO INDUSTRIAL

Pag. 408



CON STAR

Pag. 410



AS 504

Pag. 414



AT 603

Pag. 448



AT 621

Pag. 450



MP 567

Pag. 458

Range

MULTIUSE

Bias



MP 570

Pag. 470



MP 585

Pag. 472



MP 590

Pag. 472



MP 600

Pag. 474



PL 801

Pag. 476

FRONT

Bias



TF 8181

Pag. 486



TF 9090

Pag. 494



TF 9393

Pag. 500



COMMANDER (F)

Pag. 502



COMMANDER TWIN RIB

Pag. 504



COMMANDER 3 RIB

Pag. 506



POWER RIB F2

Pag. 506



PRO RIB F2M

Pag. 508



RIB F3

Pag. 510



STEER FARM

Pag. 512

Range

IMPLEMENT

Radial Bias



AW 711

Pag. 516



AW 702

Pag. 520



AW 705

Pag. 534



RIB IMPLEMENT (B)

Pag. 562



RIB 713

Pag. 564



RIB 774 (A)

Pag. 566



AW 708

Pag. 540



AW 726

Pag. 546



AW 729

Pag. 548



RIB 774 (B)

Pag. 568



RIB 774 (C)

Pag. 572



RIB 775

Pag. 574




TERRA TRAX

Pag. 548



AW 909

Pag. 550



AW 09

Pag. 554



RIB 900

Pag. 574



RIB MASTER

Pag. 576



FLOTATION RIB IMPLEMENT

Pag. 576



AW - 18

Pag. 560



BK 4040

Pag. 560



RIB IMPLEMENT (A)

Pag. 562



MULTI RIB

Pag. 578



AS 504

Pag. 580



AS 505

Pag. 612

Range

IMPLEMENT

Radial Bias



AS 507

Pag. 614



AS 509

Pag. 614



FARM 2000

Pag. 616



TR 882

Pag. 620



SL 441

Pag. 624



AS 511

Pag. 624



AW 712

Pag. 626



PL 846

Pag. 626



RM 500

Pag. 628



SR 713

Pag. 630

LAWN & GARDEN

Radial Bias



TR 360

Pag. 634



LG SMOOTH

Pag. 634



LG 306

Pag. 636



LG 307

Pag. 646



LG 408

Pag. 648



LG RIB

Pag. 650



AGRIMAX TURF RT 333

Pag. 652



TRAC MASTER

Pag. 654



TR 313

Pag. 654



TR 315

Pag. 656



TR 317

Pag. 660



TR 319

Pag. 660

Range

GOLF

Bias



GF 304

Pag. 664



GF 305 CLASSIC

Pag. 664

TRAILER

Bias



GF 305 FARM TRAILER

Pag. 668



INDUSTRIAL RIB F3

Pag. 670



I - 1

Pag. 672



AGRI GRIP

Pag. 684



FARM HIGHWAY TOUGH

Pag. 686



BK 823

Pag. 688



SL 441

Pag. 690



ST 180

Pag. 692



TR 387

Pag. 698



TR 390

Pag. 702



TR 391

Pag. 704



BK 308

Pag. 704

Range

TRAILER

Bias



AGRI TRAILER

Pag. 706



ARROW

Pag. 708




BK 208

Pag. 712



RM 2002

Pag. 736



TUF LUG

Pag. 738



VIJETA

Pag. 740



BK 627

Pag. 712



BK 826

Pag. 714



BK RUF N TUF

Pag. 718



COLT

Pag. 720



D 404

Pag. 722



D 405

Pag. 728



DON 2000

Pag. 730



FLOTATION V LINE

Pag. 732



MT 612

Pag. 734

Range

TRANSPORT

Bias



MH TR 182

Pag. 744



LT TR 182

Pag. 746

ATV

Radial Bias



W 207

Pag. 750



AT 112

Pag. 756



AT 108

Pag. 758



AT 109

Pag. 764



AT 110

Pag. 766



AT 111

Pag. 768



AT 111 HD

Pag. 772



AT 119

Pag. 774



AT 171

Pag. 776



BOGMAX

Pag. 782



SIERRA MAX

Pag. 782

Range

GO KART

Bias



SM 48 (GK)

Pag. 788



SM 54 (GK)

Pag. 788



SM 68 (GK)

Pag. 790



Legend of icons

TECHNOLOGIES


All Steel Radial


All Steel


Aramid Belted


Block Pattern


Deep Tread


Extra Deep Tread


Extra Steel Belted


Hard Compound


Heavy Duty


High Speed


More Belts


IF Technology


More Lugs


Larger Footprint


M+S


Narrow Rim Option


Reinforced Bead


Reinforced Carcass


Reinforced Shoulder


Rounded Shoulder Technology


Snow Pattern


Special Compound


Steel Belted


Strong Casing


VF Technology

PERFORMANCE


Comfort


Cut and Chip Resistance


Cut Resistance


Durability


Field Protection


Fuel Economy


Handling & Comfort


Hard Surfaces


Excellent Flotation


High Load Capacity



High Mileage


High Puncture Resistance


Ice and Snow


Low Rolling Resistance


Multi-Purpose Tires


On/Off Road


Ideal For Grassland


Reduced Soil Compaction


Road Oriented


Self-Cleaning


Sport


Stability


Steering Control


Stubble Resistance


For Muddy Ground


Traction

How to read technical data

Tire size

This data indicates tire size according to international standards.

RIM Rec./Alt.

RIM Rec. parameter indicates the recommended rim size for the tire according to ETRTO.
RIM Alt. parameter indicates the alternative rim size for the tire according to technical standard.

S.W.

SECTION WIDTH
This parameter indicates the outer sidewall distance without taking into consideration the prominences due to tire code marking. The section width is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

O.D.

OVERALL DIAMETER
This parameter is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

SLR

SLR - STATIC LOADED RADIUS
This parameter indicates the vertical distance between the ground and the tire rotation axis. It is measured with the tire inflated at its nominal pressure, properly mounted on its reference rim at maximum load according to the values defined in the load index.

RC

ROLLING CIRCUMFERENCE
indicates the distance the tire travels in one revolution

Version

The Version parameter indicates whether the tyre is a standard version or has specific characteristics for a different use.

PR

The PR parameter states for "Ply Rating" and is an expression of the tire's load capacity, primarely used for conventional tires.

Type

This parameters indicates whether the tire is tubeless (TL) or the type of air chamber mounted.

SRI

The Speed Radius Index parameter is a theoretical value used to calculate the speed of a vehicle according to EU homologation procedures, and for a potential interchangeability of tire dimension.

LI/SS

LOAD INDEX / SPEED SYMBOL
The load index is a numeric code that defines the tire's maximum loading capacity in kg. For each tire type/size, the loading capacity is always related to a specific inflation pressure as defined by ETRTO standards and manufacturer specifications.
Speed Symbol: the speed code is a symbol that indicates the maximum speed admitted at the given load index, following any other specific conditions defined by the tire manufacturer.

LI/SS Drive Wheel

This parameter indicates the "Load Index" and the "Speed Code" for tire fitted on a drive wheel.

LI/SS Free Rolling

This parameter indicates the "Load Index" and the "Speed Code" for tire fitted on a free rolling wheel.

TRACTOR

Radial



AGRIMAX V-FLECTO

AGRIMAX V-FLECTO is BKT's response to the challenging demand of both technology and performance for high-power tractors. This tire is perfect for soil tillage and haulage applications thanks to reduced soil compaction and self-cleaning properties. With the exclusive VF technology, AGRIMAX V-FLECTO can carry heavy loads with a lower inflating pressure compared to standard and IF tires, reaching high speeds. It also features the Narrow Rim Option that allows mounting standard rims on the tire. BKT has designed this tire with optimized geometry to enhance driving comfort both in the fields and on the road reducing fuel consumption.

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
∅ 28"	VF 480/60 R 28 NRO	145 D	DW 16 L	W 16 L	470	1290	571	3807	625	STD
	VF 520/60 R 28 NRO	149 D	DW 18 L	W 18 L	516	1335	587	3910	650	STD
	VF 540/65 R 28 NRO	154 D	DW 20 B	DW 18 L	539	1413	622	4115	675	STD
	VF 600/60 R 28 NRO	157 D	DW 20 B	DW 18 L	587	1440	632	4228	675	STD
∅ 30"	VF 540/65 R 30 NRO	158 D	DW 20 B	DW 18 L	539	1464	650	4351	700	STD
	VF 600/60 R 30 NRO	158 D	DW 20 B	DW 18 L ; DW 21 B	595	1485	649	4404	700	STD

STD: Standard

TRACTOR

Radial



AGRIMAX V-FLECTO

AGRIMAX V-FLECTO is BKT's response to the challenging demand of both technology and performance for high-power tractors. This tire is perfect for soil tillage and haulage applications thanks to reduced soil compaction and self-cleaning properties. With the exclusive VF technology, AGRIMAX V-FLECTO can carry heavy loads with a lower inflating pressure compared to standard and IF tires, reaching high speeds. It also features the Narrow Rim Option that allows mounting standard rims on the tire. BKT has designed this tire with optimized geometry to enhance driving comfort both in the fields and on the road reducing fuel consumption.

AGRIMAX V-FLECTO RADIAL "VF" TECHNOLOGY TIRES

∅ 28"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire) km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6
	VF 480/60 R 28 NRO	145 D	DW 16 L	W 16 L	470	1290	571	3807	625	STD	70	1450	1685	1920	2160	2395	2635
											From 65 to 40	1595	1855	2115	2375	2635	2900
											30	1625	1890	2155	2420	2685	2955
											20	1655	1925	2195	2470	2740	3015
											10	1750	2040	2325	2610	2895	3190
											10 Cyc*	2230	2595	2960	3325	3685	4060
											10HT	1625	1890	2155	2420	2685	2955
	VF 520/60 R 28 NRO	149 D	DW 18 L	W 18 L	516	1335	587	3910	650	STD	km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6
											70	1620	1890	2155	2425	2685	2955
											From 65 to 40	1785	2080	2370	2665	2955	3250
											30	1820	2120	2415	2715	3010	3315
											20	1855	2160	2460	2770	3070	3380
											10	1960	2285	2605	2930	3250	3575
											10 Cyc*	2495	2910	3315	3730	4135	4550
											10HT	1820	2120	2415	2715	3010	3315
	VF 540/65 R 28 NRO	154 D	DW 20 B	DW 18 L	539	1413	622	4115	675	STD	km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6
											70	1910	2250	2555	2865	3135	3410
											From 65 to 40	2100	2475	2810	3150	3450	3750
											30	2140	2520	2865	3210	3515	3825
											20	2180	2570	2920	3275	3585	3900
											10	2310	2720	3090	3465	3795	4125
											10 Cyc*	2940	3465	3930	4410	4830	5250
											10HT	2140	2520	2865	3210	3515	3825
	VF 600/60 R 28 NRO	157 D	DW 20 B	DW 18 L	587	1440	632	4228	675	STD	km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6
											70	2060	2400	2735	3075	3410	3750
											From 65 to 40	2265	2640	3010	3380	3750	4125
											30	2310	2690	3070	3445	3825	4205
											20	2355	2745	3130	3515	3900	4290
											10	2490	2900	3310	3715	4125	4535
											10 Cyc*	3170	3695	4210	4730	5250	5775
											10HT	2310	2690	3070	3445	3825	4205
∅ 30"	VF 540/65 R 30 NRO	158 D	DW 20 B	DW 18 L	539	1464	650	4351	700	STD	km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0
											70	1970	2275	2585	2935	3205	3480	3865
											From 65 to 40	2165	2505	2845	3230	3525	3825	4250
											30	2205	2555	2900	3290	3595	3900	4335
											20	2250	2605	2955	3355	3665	3975	4420
											10	2380	2755	3125	3550	3875	4205	4675
											10 Cyc*	3030	3505	3980	4520	4935	5355	5950
											10HT	2205	2555	2900	3290	3595	3900	4335
	VF 600/60 R 30 NRO	158 D	DW 20 B	DW 18 L ; DW 21 B	595	1485	649	4404	700	STD	km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6
											70	2120	2475	2820	3170	3515	3865
											From 65 to 40	2335	2720	3100	3485	3865	4250
											30	2380	2770	3160	3550	3940	4335
											20	2425	2825	3220	3620	4015	4420
											10	2565	2990	3410	3830	4250	4675
											10 Cyc*	3265	385	4340	4875	5410	5950
											10HT	2380	2770	3160	3550	3940	4335

STD: Standard

* For 10 Cyc application inflation pressure to be increased by 0.8 bar

Technology

- VF Technology
- High Speed
- Reinforced Bead
- Narrow Rim Option

Performance

- Reduced Soil Compaction
- Traction
- Self-Cleaning
- High Load Capacity
- Fuel Economy
- Handling & Comfort

AGRIMAX V-FLECTO

∅ 30”

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
VF 600/70 R 30 NRO	168 D	DW 21 B	DW 20 B	603	1602	702	4764	750	STD

Load capacity (kg/tire)

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0
70	2545	2950	3360	3820	4225	4635	5095
From 65 to 40	2800	3245	3695	4200	4645	5095	5600
30	2855	3305	3765	4280	4735	5195	5710
20	2910	3370	3840	4365	4830	5295	5820
10	3080	3565	4060	4620	5105	5600	6160
10 Cyc*	3920	4540	5170	5880	6500	7130	7840
10HT	2855	3305	3765	4280	4735	5195	5710

∅ 38”

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
VF 540/65 R 38 NRO	162 D	DW 20 B	DW 18 L	549	1676	760	4981	800	STD

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0
70	2200	2545	2890	3285	3585	3890	4320
From 65 to 40	2420	2800	3180	3610	3940	4275	4750
30	2465	2855	3240	3680	4015	4360	4845
20	5215	2910	3305	3750	4095	4445	4940
10	2660	3080	3495	3970	4330	4700	5225
10 Cyc*	3385	3920	4450	5050	5515	5985	6650
10HT	2465	2855	3240	3680	4015	4360	4845

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
VF 600/60 R 38 NRO	166 D	DW 20 B	DW 18 L	587	1685	757	5044	800	STD

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0
70	2360	2745	3180	3565	3950	4340	4820
From 65 to 40	2595	3020	3495	3920	4345	4770	5300
30	2645	3080	3560	3995	4430	4865	5405
20	2695	3140	3630	4075	4515	4960	5510
10	2850	3320	3840	4310	4775	5245	5830
10 Cyc*	3630	4225	4890	5485	6080	6675	7420
10HT	2645	3080	3560	3995	4430	4865	5405

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
VF 600/60 R 38 NRO	168 D	DW 20 B	DW 18 L	587	1685	757	5077	800	STD

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
70	2345	2705	3110	3465	3875	4230	4740	5095
From 65 to 40	2580	2970	3420	3810	4260	4650	5210	5600
30	2630	3030	3485	3885	4340	4740	5315	5710
20	2680	3085	3555	3960	4425	4835	5415	5820
10	2835	3265	3760	4190	4685	5115	5730	6160
10 Cyc*	3610	4160	4785	5335	5960	6510	7295	7840
10HT	2630	3030	3485	3885	4340	4740	5315	5710

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
VF 650/60 R 38 NRO	166 D	DW 23 B	DW 21 B	650	1745	774	5231	825	STD

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6
70	2650	3080	3515	3950	4385	4820
From 65 to 40	2915	3390	3865	4345	4820	5300
30	2970	3455	3940	4430	4915	5405
20	3030	3525	4015	4515	5010	5510
10	3205	3725	4250	4775	5300	5830
10 Cyc*	4080	4745	5410	6080	6745	7420
10HT	2970	3455	3940	4430	4915	5405

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
VF 650/60 R 38 NRO	173 D	DW 23 B	DW 21 B	650	1745	774	5180	825	STD

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
70	2725	3135	3610	1025	4500	4910	5505	5915
From 65 to 40	2990	3445	3965	4420	4940	5395	6045	6500
30	3050	3515	4045	4510	5040	5504	6170	6630
20	3110	3585	4125	4600	5140	5615	6290	6760
10	3290	3790	4365	4865	5435	5935	6650	7150
10 Cyc*	4190	4825	5555	6190	6920	7555	8465	9100
10HT	3050	3515	4045	4510	5040	5505	6170	6630

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
VF 650/65 R 38 NRO	169 D	DW 23 B	DW 21 B	650	1825	798	5387	875	STD

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6
70	2950	3480	3955	4430	4850	5275
From 65 to 40	3245	3825	4350	4870	5335	5800
30	3305	3900	4435	4965	5440	5915
20	3370	3975	4520	5060	5545	6030
10	3565	4205	4785	5355	5865	6380
10 Cyc*	4540	5355	6090	6815	7465	8120
10HT	3305	3900	4435	4965	5440	5915

STD: Standard

* For 10 Cyc application inflation pressure to be increased by 0.8 bar

Technology

- VF Technology
- High Speed
- Reinforced Bead
- Narrow Rim Option

Performance

- Reduced Soil Compaction
- Traction
- Self-Cleaning
- High Load Capacity
- Fuel Economy
- Handling & Comfort

AGRIMAX V-FLECTO

∅ 38"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	VF 710/60 R 38 NRO	171 D	DW 25 B	DW 23 B	708	1820	794	5447	875	STD
	VF 710/70 R 38	181 D	DW 24 B	DW 23 B; DW 25 B	715	1961	843	5773	925	STD
∅ 42"	VF 650/65 R 42 NRO	174 D	DW 23 B	DW 21 B	650	1913	852	5773	925	STD
	VF 710/60 R 42 NRO	173 D	DW 25 B	DW 23 B ; MW 25 B	710	1930	860	5786	925	STD
	VF 900/60 R 42 NRO	189 D	DW 30B	-	900	2142	931	6381	-	STD

Load capacity (kg/tire)

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0
70	3075	3580	4080	4585	5090	5595	
From 65 to 40	3380	3935	4485	5040	5595	6150	
30	3445	4010	4570	5140	5705	6270	
20	3515	4090	4660	5240	5815	6395	
10	3715	4325	4930	5540	6150	6765	
10 Cyc*	4730	5505	6275	7055	7830	8610	
10HT	3445	4010	4570	5140	5705	6270	

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	1.6
70	3750	4350	4950	5625	6225	6825	7505
From 65 to 40	4125	4785	5445	6185	6845	7505	8250
30	4205	4880	5550	6305	6980	7655	8415
20	4290	4975	5660	6430	7115	7805	8580
10	4535	5260	5985	6800	7525	8255	9075
10 Cyc*	5775	6695	7620	8655	9580	10505	11550
10HT	4205	4880	5550	6305	6980	7655	8415

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0
70	3105	3590	4080	4630	5055	5485	6095
From 65 to 40	3415	3950	4485	5090	5560	6030	6700
30	3480	4025	4570	5190	5670	6150	6830
20	3350	4105	4660	5290	5780	6270	6965
10	3755	4345	4930	5595	6115	6630	7370
10 Cyc*	4780	5530	6275	7125	7780	8440	9380
10HT	3480	4025	4570	5190	5670	6150	6830

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6
70	3250	3785	4315	4850	5380	5915
From 65 to 40	3575	4160	4745	5330	5915	6500
30	3645	4240	4835	5435	6030	6630
20	3715	4325	4930	5540	6150	6760
10	3930	4575	5215	5860	6505	7150
10 Cyc*	5005	5820	6640	7460	8280	9100
10HT	3645	4240	4835	5435	6030	6630

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0
70	4590	5340	6180	6930	7680	8435	9370
From 65 to 40	5045	5870	6795	7620	8445	9270	10300
30	5145	5985	6930	7770	8610	9455	10505
20	5245	6100	7065	7920	8780	9640	10710
10	5545	6455	7470	8380	9285	10195	11330
10 Cyc*	7060	8215	9510	10665	11820	12975	14420
10HT	5145	5985	6930	7770	8610	9455	10505

STD: Standard

* For 10 Cyc application inflation pressure to be increased by 0.8 bar

Technology

- VF Technology
- High Speed
- Reinforced Bead
- Narrow Rim Option

Performance

- Reduced Soil Compaction
- Traction
- Self-Cleaning
- High Load Capacity
- Fuel Economy
- Handling & Comfort

Radial



AGRIMAX FORCE

AGRIMAX FORCE, the high-end product of BKT, is a radial tire specially designed for soil tillage, haulage and harvesting applications with high-power tractors and harvesters, ensuring top performance and efficiency. Thanks to its IF technology, this tire can carry heavy loads with a lower inflating pressure compared to a standard tire reducing soil compaction. AGRIMAX FORCE features a reinforced bead and provides enhanced traction, top self-cleaning properties and fuel economy in addition to a comfortable riding experience.

AGRIMAX FORCE
RADIAL 'IF' TECHNOLOGY TIRES

∅ 28"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire)	km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
	IF 600/70 R 28	164 D	DW 21 B	DW 20 B	603	1551	694	4654	725	STD		70	2135	2455	2820	3185	3545	3910	4275	4550
												from 65 to 40	2350	2700	3100	3500	3900	4300	4700	5000
												30	2440	2805	3220	3640	4055	4470	4885	5200
												20	2535	2915	3345	3780	4210	4640	5075	5400
												10	2980	3425	3935	4445	4950	5460	5965	6350
												10 Cyc*	3290	3780	4340	4900	5460	6020	6580	7000
												10 HT	2440	2805	3220	3640	4055	4470	4885	5200
	IF 710/55 R 28 CFO	165 D	DW 25 B	-	716	1493	663	4442	700	STD		km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
												70	2150	2475	2855	3185	3555	3885	4350	4685
												from 65 to 40	2365	2725	3140	3500	3910	4270	4785	5150
												30	2455	2830	3265	3640	4065	4440	4975	5355
												20	2550	3940	3390	3780	4220	4610	5165	5560
												10	3000	3460	3985	4445	4965	5420	6075	6540
												Upto 30 Cyc*	3070	3540	4080	4550	5080	5550	6220	6695
												Upto 15 Cyc*	3665	4220	4865	5425	6060	6615	7415	7980
												10 HT	2455	2830	3265	3640	4065	4440	4975	5355
∅ 30"	IF 710/55 R 30 CFO	166 D	DW 25 B	-	716	1544	686	4616	725	STD		km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
												70	2215	2550	2930	3275	3660	3995	4480	4820
												from 65 to 40	2435	2805	3230	3600	4025	4395	4925	5300
												30	2530	2915	3355	3740	4185	4570	5120	5510
												20	2625	3025	3485	3885	4345	4745	5315	5720
												10	3090	3560	4100	4570	5110	5580	6250	6730
												Upto 30 Cyc*	3165	3645	4195	4680	5230	5710	6400	6890
												Upto 15 Cyc*	3770	4345	5005	5580	6235	6810	7630	8215
												10 HT	2530	2915	3355	3740	4185	4570	5120	5510
	IF 600/70 R 30 CFO	165 D	DW 21 B ; DW 21 A	DW 20 A ; DW 20 B	603	1602	708	4800	750	STD		km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
												70	2200	2525	2900	3280	3650	4025	4400	4685
												from 65 to 40	2420	2780	3190	3605	4015	4425	4840	5150
												30	2515	2890	3315	3745	4175	4600	5030	5355
												20	2610	3000	3445	3890	4335	4775	5225	5560
												10	3070	3530	4050	4575	5095	5615	6145	6540
												Upto 30 Cyc*	3145	3610	4145	4685	5215	5750	6290	6695
												Upto 15 Cyc*	3750	4305	4940	5585	6220	6855	7500	7980
												10 HT	2515	2890	3315	3745	4175	4600	5030	5355
	IF 600/70 R 30 CFO	165 D	DW 21 B ; DW 21 A	DW 20 A ; DW 20 B	603	1602	708	4800	750	SPL		km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
												70	2200	2525	2900	3280	3650	4025	4400	4685
												from 65 to 40	2420	2780	3190	3605	4015	4425	4840	5150
												30	2515	2890	3315	3745	4175	4600	5030	5355
												20	2610	3000	3445	3890	4335	4775	5225	5560
												10	3070	3530	4050	4575	5095	5615	6145	6540
												Upto 30 Cyc*	3145	3610	4145	4685	5215	5750	6290	6695
												Upto 15 Cyc*	3750	4305	4940	5585	6220	6855	7500	7980
												10 HT	2515	2890	3315	3745	4175	4600	5030	5355

STD: Standard - SPL: Special

* For 30 & 15 Cyc application inflation pressure to be increased by 0.8 bar

Technology

- IF Technology
- High Speed
- Reinforced Bead

Performance

- Reduced Soil Compaction
- Traction
- Self-Cleaning
- High Load Capacity
- Fuel Economy
- Handling & Comfort

AGRIMAX FORCE

∅ 30”

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
IF 710/60 R 30 CFO	168 D	DW 25 B	-	708	1614	714	4814	775	STD
IF 620/75 R 30	169 D	DW 23 B	DW 21 B	650	1703	759	5100	800	STD

Load capacity (kg/tire)

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
70	2340	2695	3105	3460	3870	4225	4735	5095
from 65 to 40	2575	2965	3415	3805	4255	4645	5205	5600
30	2675	3080	3550	3955	4425	4830	5410	5820
20	2780	3200	3685	4105	4595	5015	5620	6045
10	3270	3765	4335	4830	5400	5895	6610	7110
Upto 30 Cyc*	3345	3850	4435	4945	5530	6035	6765	7280
Upto 15 Cyc*	3990	4595	5290	5895	6595	7195	8065	8680
10 HT	2675	3080	3550	3955	4425	4830	5410	5820

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
70	2475	2845	3270	3690	4110	4535	4955	5275
From 65 to 40	2725	3130	3595	4060	4520	4985	5450	5800
30	2830	3288	3735	4220	4700	5180	5665	6030
20	2940	3380	3880	4380	4880	5380	5885	6260
10	3460	3975	4565	5155	5740	6330	6920	7365
10 Cyc	3815	4380	5030	5680	6325	6975	7630	8120
10 HT	2830	3255	3735	4220	4700	5180	5665	6030

∅ 34”

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
IF 710/55 R 34 CFO	170 D	DW 25 B	-	716	1646	746	4962	775	STD
IF 600/70 R 34	167 D	DW 21 B ; DW 21 A	DW 20 A ; DW 20 B	603	1704	757	5070	800	STD
IF 650/60 R 34	165 D	DW 23 B	-	650	1644	746	4954	775	STD
IF 650/65 R 34 CFO	161 D	DW 23 B	-	650	1710	764	5078	825	STD
IF 650/65 R 34 CFO	161 D	DW 23 B	-	650	1710	764	5078	825	SPL

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
70	2125	2455	2780	3165	3490	3875	4310	4640	5075	5460
from 65 to 40	2340	2700	3060	3480	3840	4260	4740	5100	5580	6000
30	2430	2805	3180	3615	3990	4430	4925	5300	5800	6240
20	2525	2915	3300	3755	4145	4600	5115	5505	6025	6480
10	2970	3425	3885	4415	4875	5410	6015	6475	7085	7620
Upto 30 Cyc*	3040	3510	3975	4520	4990	5535	6160	6630	7250	7800
Upto 15 Cyc*	3625	4185	4740	5390	5950	6600	7345	7905	8645	9300
10 HT	2430	2805	3180	3615	3990	4430	4925	5300	5800	6250

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
70	2325	2675	3070	3470	3865	4260	4655	4955
from 65 to 40	2560	2940	3375	3815	4250	4685	5120	5450
30	2660	3055	3510	3965	4420	4870	5320	5665
20	2760	3175	3645	4120	4590	5055	5525	5885
10	3250	3730	4285	4845	5395	5945	6500	6920
10 Cyc*	3580	4115	4725	5340	5950	6555	7165	7630
10 HT	2660	3055	3510	3965	4420	4870	5320	5665

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
70	2150	2475	2855	3185	3555	3885	4350	4685
from 65 to 40	2365	2725	3140	3500	3910	4270	4785	5150
30	2455	2830	3265	3640	4065	4440	4975	5355
20	2550	2940	3390	3780	4220	4610	5165	5560
10	3000	3460	3985	4445	4965	5420	6075	6540
10 Cyc	3310	3815	4395	4900	5470	5975	6695	7210
10 HT	2455	2830	3265	3640	4065	4440	4975	5355

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6
70	2355	2775	3150	3535	3870	4205
From 65 to 40	2590	3050	3465	3885	1255	4625
30	2690	3170	3600	4040	4425	4810
20	2795	3290	3740	4195	4595	4995
10	3285	3870	4850	5435	5955	6475
Upto 30 Cyc*	3365	3965	4500	5050	5530	6010
Upto 15 Cyc*	4010	4725	5370	6020	6595	7165
10HT	2690	3170	3600	4040	4425	4810

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6
70	2355	2775	3150	3535	3870	4205
From 65 to 40	2590	3050	3465	3885	1255	4625
30	2690	3170	3600	4040	4425	4810
20	2795	3290	3740	4195	4595	4995
10	3285	3870	4850	5435	5955	6475
Upto 30 Cyc*	3365	3965	4500	5050	5530	6010
Upto 15 Cyc*	4010	4725	5370	6020	6595	7165
10HT	2690	3170	3600	4040	4425	4810

STD: Standard - SPL: Special

* For 30 & 15 Cyc application inflation pressure to be increased by 0.8 bar

Technology

- IF Technology
- High Speed
- Reinforced Bead

Performance

- Reduced Soil Compaction
- Traction
- Self-Cleaning
- High Load Capacity
- Fuel Economy
- Handling & Comfort

AGRIMAX FORCE

∅ 34"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	IF 710/60 R 34 CFO	170 D	DW 25 B	-	708	1716	763	5126	825	STD
	IF 710/75 R 34 CFO	178 D	DW 25 B	-	716	1929	864	5750	925	STD
∅ 38"	IF 650/65 R 38 CFO	169 D	DW 23 B	-	650	1830	830	5510	875	STD
	IF 380/80 R 38	149 D	W 12	W 11 ; W 13	380	1573	725	4759	-	STD
	IF 420/85 R 38	155 D	DW 14 A	DW 15 A	419	1670	810	5017	-	STD
	IF 650/85 R 38 CFO	179 D	DW 23 B	-	663	2071	927	6106	975	STD

Load capacity (kg/tire)

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
70	2510	2890	3330	3710	4145	4530	5075	5460
from 65 to 40	2760	3180	3660	4080	4560	4980	5580	6000
30	2870	3305	3805	4240	4740	5175	5800	6240
20	2980	3430	3950	4405	4920	5375	6025	6420
10	3505	4035	4645	5180	5790	6320	7085	7625
Upto 30 Cyc*	3585	4130	4755	5300	5925	6470	7250	7800
Upto 10 Cyc*	4275	4925	5670	6320	7065	7715	8645	9300
10 HT	2870	3305	3805	4240	4740	5175	5800	6240

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.3
70	3205	3685	4230	4775	5320	5865	6415	6825
from 65 to 40	3525	4050	4650	5250	5850	6450	7050	7500
30	3665	4210	4835	5460	6080	6705	7330	7800
20	3805	4370	5020	5670	6315	6965	7610	8100
10	4475	5140	5905	6665	7425	8190	8950	9525
Upto 30 Cyc*	4580	5265	6045	6825	7605	8385	9165	9750
Upto 15 Cyc*	4935	5670	6510	7350	8190	9030	9870	10500
10 HT	3665	4210	4835	5460	6080	6705	7330	7800

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
70	2475	2900	3320	3690	4060	4375	4900	5275
From 65 to 40	2725	3190	3650	4060	4465	4810	5390	5800
30	2830	3315	3795	4220	4640	5000	5605	6030
20	2940	3445	3940	4380	4820	5190	5820	6260
10	3460	4050	4635	5155	5670	6105	6845	7365
Upto 30 Cyc*	3540	4145	4745	5275	5800	6250	7005	7540
Upto 15 Cyc*	4220	4940	5655	6290	6920	7455	8350	8990
10HT	2830	3315	3795	4220	4640	5000	5605	6030

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
70	1385	1595	1830	2070	2305	2540	2780	2955
From 65 to 40	1525	1755	2015	2275	2535	2795	3055	3250
30	1585	1825	2095	2365	2635	2905	3175	3380
20	1645	1895	2175	2455	2735	3015	3295	3510
10	1935	2225	2555	2885	3215	3545	3875	4125
10 Cyc*	2135	2455	2820	3185	3545	3910	4275	4550
10HT	1585	1825	2095	2365	2635	2905	3175	3380

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
70	1655	1900	2180	2465	2745	3030	3310	3525
from 65 to 40	1820	2090	2400	2710	3020	3330	3640	3875
30	1890	2170	2495	2815	3140	3460	3785	4030
20	1965	2255	2590	2925	3260	3595	3930	4185
10	2310	2650	3045	3440	3835	4225	4620	4920
10 Cyc*	2545	2925	3360	3790	4225	4660	5095	5425
10 HT	1890	2170	2495	2815	3140	3460	3785	4030

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
70	3310	3805	4370	4935	5500	6065	6625	7050
from 65 to 40	3640	4185	4805	5425	6045	6665	7285	7750
30	3785	4350	4995	5640	6285	6930	7575	8060
20	3930	4515	5185	5855	6525	7195	7865	8370
10	4620	5310	6100	6885	7675	8460	9250	9840
Upto 30 Cyc*	4730	5440	6245	7050	7855	8660	9470	10075
Upto 15 Cyc*	5640	6485	7445	8405	9365	10330	11290	12010
10 HT	3785	4350	4995	5640	6285	6930	7575	8060

STD: Standard

* For 30 & 15 Cyc application inflation pressure to be increased by 0.8 bar

Technology

IF Technology

High Speed

Reinforced Bead

Performance

Reduced Soil Compaction

Traction

Self-Cleaning

High Load Capacity

Fuel Economy

Handling & Comfort

AGRIMAX FORCE

∅ 38"

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
IF 710/60 R 38	172 D	DW 25 B	-	708	1817	812	5462	875	STD
IF 800/70 R 38	184 D	DW 27 B	DW 25 B	794	2085	923	6184	975	STD
IF 900/60 R 38	184 D	DW 30 A ; DW 30 B	TW 31 B	916	2045	904	6107	975	STD

Load capacity (kg/tire)

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
70	2630	3030	3490	3890	3450	4750	5325	5730
from 65 to 40	2895	3335	3840	4280	4785	5225	5855	6300
30	3010	3465	3990	4450	4975	5430	6085	6550
20	3125	3600	4145	4620	5165	5640	6320	6800
10	3675	4235	4875	5435	6075	6635	7435	8000
10 Cyc*	4050	4665	5375	5990	6695	7315	8195	8820
10 HT	3010	3465	3990	4450	4975	5430	6085	6550
10 HT	3910	4490	5155	5820	6485	7155	7820	8320

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
70	3845	4500	5155	5730	6305	6795	7615	8190
from 65 to 40	4230	4950	5670	6300	6930	7470	8370	9000
30	4395	5145	5895	6550	7205	7765	8700	9360
20	4565	5345	6120	6800	7480	8065	9035	9720
10	5370	6285	7200	8000	8800	9485	10625	11430
Upto 30 Cyc*	5495	6435	7370	8190	9005	9710	10880	11700
Upto 15 Cyc*	6555	7670	8785	9765	10740	11575	12970	13950
10 HT	4395	5145	5895	6550	7205	7765	8700	9360

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
70	3765	4340	4995	5565	6220	6795	7615	8190
from 65 to 40	4140	4770	5490	6120	6840	7470	8370	9000
30	4305	4960	5705	6360	7110	7765	8700	9360
20	4470	5150	5925	6605	7385	8065	9035	9720
10	5255	6055	6970	7770	8685	9485	10625	11430
10 Cyc*	5795	6675	7685	8565	9575	10455	11715	12600
10 HT	4305	4960	5705	6360	7110	7765	8700	9360

∅ 34"

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
IF 650/85 R 42 CFO	180 D	DW 23 B	-	650	2173	965	6400	1025	STD
IF 710/70 R 42 CFO	179 D	DW 25 B	DW 23 B	716	2061	919	6200	975	STD
IF 710/70 R 42 CFO	179 D	DW 25 B	DW 23 B	716	2061	919	6200	975	SPL

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
70	3420	3930	4510	5095	5675	6260	6840	7280
From 65 to 40	3760	4320	4960	5600	6240	6880	7520	8000
30	3910	4490	5155	5820	6485	7155	7820	8320
20	4060	4665	5355	6045	6735	7430	8120	8640
10	4775	5485	6295	7110	7920	8735	9550	10160
Upto 30 Cyc*	4885	5615	6445	7280	8110	8940	9775	10400
Upto 15 Cyc*	5825	6695	7685	8680	9670	10660	11655	12400
10 HT	3910	4490	5155	5820	6485	7155	7820	8320

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
70	3310	3805	4370	4935	5500	6065	6625	7050
From 65 to 40	3640	4185	4805	5425	6045	6665	7285	7750
30	3785	4350	4995	5640	6285	6930	7575	8060
20	3930	4515	5185	5855	6525	7195	7865	8370
10	4620	5310	6100	6885	7675	8460	9250	9840
Upto 30 Cyc*	4730	5440	6245	7050	7855	8660	9470	10075
Upto 15 Cyc*	5640	6485	7445	8405	9365	10330	11290	12010
10 HT	3785	4350	4995	5640	6285	6930	7575	8060

km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
70	3310	3805	4370	4935	5500	6065	6625	7050
From 65 to 40	3640	4185	4805	5425	6045	6665	7285	7750
30	3785	4350	4995	5640	6285	6930	7575	8060
20	3930	4515	5185	5855	6525	7195	7865	8370
10	4620	5310	6100	6885	7675	8460	9250	9840
Upto 30 Cyc*	4730	5440	6245	7050	7855	8660	9470	10075
Upto 15 Cyc*	5640	6585	7445	8405	9365	10330	11290	12010
10 HT	3785	4350	4995	5640	6285	6930	7575	8060

STD: Standard - SPL: Special

* For 30 & 15 Cyc application inflation pressure to be increased by 0.8 bar

Technology

- IF Technology
- High Speed
- Reinforced Bead

Performance

- Reduced Soil Compaction
- Traction
- Self-Cleaning
- High Load Capacity
- Fuel Economy
- Handling & Comfort

AGRIMAX FORCE

∅ 42"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire)								
											km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
	IF 710/75 R 42	181 D	DW 25 B	-	716	2133	967	6403	1025	STD	70	3525	4050	4650	5255	5855	6455	7055	7505
											From 65 to 40	3875	4455	5115	5775	6435	7095	7755	8250
											30	4030	4630	5315	6005	6690	7375	8065	8580
											20	4185	4810	5520	6235	6945	7660	8375	8910
											10	4920	5655	6495	7330	8170	9010	9845	10475
											10 Cyc*	5425	6235	7160	8085	9005	9930	10855	11550
											10 HT	4030	4630	5315	6005	6690	7375	8065	8580
	IF 710/75 R 42	181 D	DW 25 B	-	716	2133	967	6403	1025	SPL	km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											70	3525	4050	4650	5255	5855	6455	7055	7505
											From 65 to 40	3875	4455	5115	5775	6435	7095	7755	8250
											30	4030	4630	5315	6005	6690	7375	8065	8580
											20	4185	4810	5520	6235	6945	7660	8375	8910
											10	4920	5655	6495	7330	8170	9010	9845	10475
											10 Cyc*	5425	6235	7160	8085	9005	9930	10855	11550
											10 HT	4030	4630	5315	6005	6690	7375	8065	8580
	IF 800/70 R 42 CFO	186 D	DW 27 B	-	794	2150	950	6400	1025	STD	km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											70	4060	4665	5355	6050	6740	7430	8125	8645
											From 65 to 40	4465	5130	5890	6650	7410	8170	8930	9500
											30	4640	5335	6125	6915	7705	8495	9285	9880
											20	4820	5540	6360	7180	8000	8820	9640	10260
											10	5670	6515	7480	8445	9410	10375	11340	12065
											Upto 30 Cyc*	5800	6665	7655	8645	9630	10620	11605	12350
											Upto 15 Cyc*	6920	7950	9125	10305	11485	12660	13840	14725
											10HT	4640	5335	6125	6915	7705	8495	9285	9880
	IF 900/50 R 42	180 D	DW 30 B	TW 30 B	896	1977	878	5905	975	STD	km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											70	3345	3855	4440	4950	5530	6040	6770	7280
											From 65 to 40	3680	4240	4880	5440	6080	6640	7440	8000
											30	3825	4405	5075	5655	6320	6905	7735	8320
											20	3970	4575	5270	5875	6565	7170	8035	8640
											10	4670	5380	6195	6905	7720	8430	9445	10160
											10 Cyc*	5150	5935	6830	7615	8510	9295	10415	11200
											10HT	3825	4405	5075	5655	6320	6905	7735	8320
	IF 900/60 R 42	186 D	DW 30 B	TW 30 B	916	2147	950	6457	1025	STD	km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											70	3975	4580	5270	5875	6570	7175	8035	8645
											From 65 to 40	4370	5035	5795	6460	7220	7885	8835	9500
											30	4540	5235	6025	6715	7505	8200	9185	9880
											20	4715	5435	6255	6975	7795	8515	9540	10260
											10	5545	6390	7355	8200	9165	10010	11220	12065
											10 Cyc*	6115	7045	8110	9040	10105	11035	12365	13300
											10HT	4540	5235	6025	6715	7505	8200	9185	9880
∅ 46"	IF 750/75 R 46	186 D	DW 25 B	-	742	2294	1032	6802	1125	STD	km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											70	4060	4665	5355	6050	6740	7430	8125	8645
											From 65 to 40	4465	5130	5890	6650	7410	8170	8930	9500
											30	4640	5335	6125	6915	7705	8495	9285	9880
											20	4820	5540	6360	7180	8000	8820	9640	10260
											10	5670	6515	7480	8445	9410	10370	11340	12065
											10 Cyc*	6250	7180	8245	9310	10370	11435	12500	13300
											10HT	4640	5335	6125	6915	7705	8495	9285	9880
∅ 50"	IF 480/95 R 50	170 D	DW 16 B	-	479	2170	994	6488	1025	STD	km/h - bar*	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											70	2565	2945	3385	3820	4255	4695	5130	5460
											From 65 to 40	2820	3240	3720	4200	4680	5160	5640	6000
											30	2930	3365	3865	4365	4865	5365	5865	6240
											20	3045	3495	4015	4535	5050	5570	6090	6480
											10	3580	4110	4720	5330	5940	6550	7160	7620
											10 Cyc*	3945	4535	5205	5880	6550	7220	7895	8400
											10HT	2930	3365	3865	4365	4865	5365	5865	6240

STD: Standard - SPL: Special

* For 30 & 15 Cyc application inflation pressure to be increased by 0.8 bar

Technology

- IF Technology
- High Speed
- Reinforced Bead

Performance

- Reduced Soil Compaction
- Traction
- Self-Cleaning
- High Load Capacity
- Fuel Economy
- Handling & Comfort

Radial

AGRIMAX FORTIS



AGRIMAX FORTIS is your reliable partner for all preparation, soil tillage and haulage operations. Designed to equip the latest, most modern and most powerful tractors, AGRIMAX FORTIS allows you to carry very high loads reaching up to 65 km/h. It ensures outstanding traction along with top handling and best comfort for a perfect driving experience. The tire has been designed with a reinforced nylon casing for enhanced productivity in the fields preserving the soil thanks to reduced compaction.

AGRIMAX FORTIS
RADIAL EXTRA LARGE TIRES

∅	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire) km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
∅ 30"	600/70 R 30	158 D/161 A8	DW 20 B	DW 18 L ; W 18 L	611	1602	724	4810	750	STD	65	2040	2380	2680	2975	3275	3530	3910	4250
											50	2145	2505	2815	3130	3440	3710	4110	4465
											40	2220	2590	2915	3240	3565	3840	4255	4625
											30	2350	2740	3085	3425	3770	4060	4500	4890
											10 LT	2735	3190	3590	3990	4390	4730	5240	5695
											10 HT	2350	2740	3085	3425	3770	4060	4500	4890
	600/70 R 30	158 D/161 A8	DW 20 B	DW 18 L ; W 18 L	611	1602	724	4810	750	SPL	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											65	2040	2380	2680	2975	3275	3530	3910	4250
											50	2145	2505	2815	3130	3440	3710	4110	4465
											40	2220	2590	2915	3240	3565	3840	4255	4625
											30	2350	2740	3085	3425	3770	4060	4500	4890
											10 LT	2735	3190	3590	3990	4390	4730	5240	5695
											10 HT	2350	2740	3085	3425	3770	4060	4500	4890
∅ 34"	600/70 R 34	160 D/163 A8	DW 18 L	DW 20 B ; W 18 L	591	1704	761	5109	800	STD	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											65	2160	2520	2835	3150	3465	3735	4140	4500
											50	2270	2650	2980	3310	3640	3925	4350	4725
											40	2340	2730	3075	3415	3755	4050	4485	4875
											30	2485	2900	3265	3625	3985	4300	4765	5175
											10 LT	2895	3380	3800	4225	4645	5005	5550	6030
											10 HT	2485	2900	3265	3625	3985	4300	4765	5175
	600/70 R 34	160 D/163 A8	DW 18 L	DW 20 B ; W 18 L	591	1704	761	5109	800	SPL	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											65	2160	2520	2835	3150	3465	3735	4140	4500
											50	2270	2650	2980	3310	3640	3925	4350	4725
											40	2340	2730	3075	3415	3755	4050	4485	4875
											30	2485	2900	3265	3625	3985	4300	4765	5175
											10 LT	2895	3380	3800	4225	4645	5005	5550	6030
											10 HT	2485	2900	3265	3625	3985	4300	4765	5175
∅ 38"	650/85 R 38	173 D/176 A8	DW 23 B	DW 21 B ; DW 20 B	675	2071	935	6184	975	STD	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											65	3120	3640	4095	4550	5005	5395	5980	6500
											50	3280	3825	4300	4780	5260	5665	6280	6825
											40	3410	3980	4475	4970	5470	5895	6535	7100
											30	3590	4190	4710	5235	5760	6205	6880	7475
											10 LT	4185	4880	5490	6100	6710	7230	8015	8710
											10 HT	3590	4190	4710	5235	5760	6205	6880	7475
	650/85 R 38	173 D/176 A8	DW 23 B	DW 21 B ; DW 20 B	675	2071	935	6184	975	SPL	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											65	3120	3640	4095	4550	5005	5395	5980	6500
											50	3280	3825	4300	4780	5260	5665	6280	6825
											40	3410	3980	4475	4970	5470	5895	6535	7100
											30	3590	4190	4710	5235	5760	6205	6880	7475
											10 LT	4185	4880	5490	6100	6710	7230	8015	8710
											10 HT	3590	4190	4710	5235	5760	6205	6880	7475
	800/70 R 38	178 D/181 A8	DW 25 B	DW 23 B ; DW 27 B	798	2085	912	6202	975	STD	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											65	3600	4200	4725	5250	5775	6225	6900	7500
											50	3780	4410	4965	5515	6065	6540	7245	7875
											40	3960	4620	5200	5775	6355	6850	7590	8250
											30	4140	4830	5435	6040	6645	7160	7935	8625
											10 LT	4825	5630	6335	7035	7740	8345	9250	10050
											10 HT	4140	4830	5435	6040	6645	7160	7935	8625

Technology

High Speed

Reinforced Carcass

Performance

Traction

High Load Capacity

Handling & Comfort

Reduced Soil Compaction

STD: Standard - SPL: Special

TRACTOR

AGRIMAX FORTIS

∅ 42"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version		Load capacity (kg/tire)								
												km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
	710/75 R 42	175 D/172 E	DW 23 B	DW 25 B	716	2133	970	6406	1025	STD		**70**	3025	3530	3970	4410	4855	5230	5800	6300
												65	3315	3865	4350	4830	5315	5730	6350	6900
												50	3480	4060	4565	5075	5580	6015	6670	7245
												40	3630	4235	4765	5295	5825	6275	6960	7560
												30	3810	4445	5000	5555	6110	6590	7305	7935
												10 LT	4440	5180	5830	6475	7125	7680	8510	9250
												10 HT	3810	4445	5000	5555	6110	6590	7305	7935
	710/75 R 42	175 D/172 E	DW 23 B	DW 25 B	716	2133	970	6406	1025	SPL		**km/h - bar**	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**	**2.0**	**2.4**
												70	3025	3530	3970	4410	4855	5230	5800	6300
												65	3315	3865	4350	4830	5315	5730	6350	6900
												50	3480	4060	4565	5075	5580	6015	6670	7245
												40	3630	4235	4765	5295	5825	6275	6960	7560
												30	3810	4445	5000	5555	6110	6590	7305	7935
												10 LT	4440	5180	5830	6475	7125	7680	8510	9250
												10 HT	3810	4445	5000	5555	6110	6590	7305	7935

STD: Standard - SPL: Special

Technology

- *High Speed*
- *Reinforced Carcass*

Performance

- *Traction*
- *High Load Capacity*
- *Handling & Comfort*
- *Reduced Soil Compaction*



TRACTOR

Radial



AGRIMAX SIRIO (R-1W)

AGRIMAX SIRIO is a high-speed tire (up to 70 km/h - 45 mph) developed by BKT for high-performance tractors. Its design is perfect for both haulage and soil tillage applications. The high sidewall flexibility ensures outstanding stability, handling and comfort to improve the driving experience. It is also available with IF technology that allows to carry heavy loads at a low inflating pressure. The reinforced casing and the high number of belts guarantee great traction on the field whereas the low rolling resistance contributes to better fuel economy.

AGRIMAX SIRIO
FAST SPEED RADIAL TIRES

∅	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire) km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
∅ 30"	540/65 R 30	150 D/147 E	W 16 L	W 18	530	1464	669	4400	700	HS	70	1450	1665	1910	2155	2400	2645	2860	3075
											65	1575	1810	2080	2345	2615	2885	3120	3350
											50	1655	1905	2185	2465	3750	3030	3275	3520
											40	1725	1985	2280	2570	2865	3160	3415	3670
											25	1870	2145	2465	2780	3100	3415	3695	3970
											10	2365	2715	3120	3520	3920	4325	4675	5025
	IF 600/70 R 30	165 D/162 E	DW 21 B	DW 20 B	603	1602	713	4759	750	HS	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											70	2235	2565	2945	3325	3705	4085	4420	4750
											65	2425	2785	3195	3605	4020	4430	4790	5150
											50	2425	2785	3195	3605	4020	4430	4790	5150
											40	2425	2785	3195	3605	4020	4430	4790	5150
											25	2425	2785	3195	3605	4020	4430	4790	5150
											10	2425	2785	3195	3605	4020	4430	4790	5150
∅ 34"	540/65 R 34	152 D/149 E	W 16 L	W 18	530	1566	721	4735	750	HS	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											70	1530	1755	2015	2275	2535	2795	3025	3250
											65	1670	1920	2205	2485	2770	3055	3305	3550
											50	1755	2015	2315	2615	2910	3210	3470	3730
											40	1830	2105	2415	2725	3035	3350	3620	3890
											25	1980	2275	2615	2950	3285	3625	3920	4210
											10	2505	2880	3305	3730	4155	4580	4955	5325
∅ 38"	540/65 R 38	153 D/150 E	W 16 L	W 18 L	530	1667	769	5050	800	HS	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											70	1575	1810	2080	2345	2615	2885	3120	3350
											65	1720	1975	2265	2555	2850	3140	3395	3650
											50	1805	2075	2380	2685	2995	3300	3570	3835
											40	1880	2160	2480	2800	3120	3440	3720	4000
											25	2040	2340	2685	3035	3380	3725	4030	4330
											10	2575	2960	3395	3835	4275	4710	5095	5475
	710/70 R 38	171 D/168 E	DW 23 B	-	716	1959	887	5917	925	HS	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											70	2635	3025	3475	3920	4370	4820	5210	5600
											65	2895	3325	3815	4305	4800	5290	5720	6150
											50	3040	3490	4010	4525	5040	5560	6010	6460
											40	3170	3640	4180	4715	5255	5795	6265	6735
											25	3430	3940	4520	5105	5690	6270	6780	7290
											10	4340	4985	5720	6460	7200	7935	8580	9225

HS: High Speed

Technology

IF Technology

High Speed

Reinforced Carcass

More Belts

Performance

Handling & Comfort

Fuel Economy

Stability

Traction

High Load Capacity

Radial



AGRIMAX RT 657 (R-1W)

AGRIMAX RT 657 is the ideal tire for soil tillage and on-the-road usage; some sizes are also suitable for vineyard harvesting. This tire guarantees an excellent driving comfort as well as significant fuel savings. AGRIMAX RT 657 is the best choice for those who need a versatile and reliable tire, with no compromise on performance.

∅	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire) km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
∅ 16"	320/65 R 16	117 D/120 A8	W 10	W 9 ; W 11	319	822	366	2466	390	STD	65	605	710	810	900	990	1070	1185	1285
											50	635	745	855	945	1040	1125	1245	1350
											40	660	770	885	980	1080	1165	1290	1400
											30	700	815	935	1040	1140	1230	1365	1480
											10 LT	815	950	1090	1210	1330	1435	1590	1725
											10 HT	700	815	935	1040	1140	1230	1365	1480
∅ 18"	320/65 R 18	109 A8/B	W 10	W 9 ; W 11	319	873	392	2587	410	STD	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6		
											50	600	695	785	870	950	1030		
											40	600	695	785	870	950	1030		
											30	645	745	840	930	1020	1105		
											10 LT	805	930	1055	1165	1275	1385		
											10 HT	645	745	840	930	1020	1105		
	340/65 R 18	113 A8/B	W 11	W 10 ; W 12	343	899	400	2667	425	STD	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6		
											50	645	760	865	970	1060	1150		
											40	645	760	865	970	1060	1150		
											30	695	820	930	1040	1140	1235		
											10 LT	870	1020	1160	1300	1425	1545		
											10 HT	695	820	930	1040	1140	1235		
∅ 20"	340/65 R 20	124 D/127 A8	W 11	W 10 ; W 12	343	950	430	2892	450	STD	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											65	755	880	1010	1120	1235	1330	1475	1600
											50	790	925	1060	1180	1295	1395	1550	1680
											40	825	965	1105	1225	1350	1455	1610	1750
											30	865	1015	1160	1290	1420	1530	1695	1840
											10 LT	1010	1180	1355	1505	1655	1785	1975	2145
											10 HT	865	1015	1160	1290	1420	1530	1695	1840
	420/65 R 20	135 D/138 A8	W 13	W 11 ; W 12	418	1054	468	3162	500	STD	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											65	1025	1200	1375	1530	1680	1810	2010	2180
											50	1080	1260	1445	1605	1765	1905	2110	2290
											40	1110	1300	1490	1655	1820	1960	2175	2360
											30	1180	1385	1585	1760	1935	2085	2310	2510
											10 LT	1375	1610	1845	2050	2255	2430	2695	2925
											10 HT	1180	1385	1585	1760	1935	2085	2310	2510
	440/65 R 20	138 D/141 A8	W 14 L	W 13 ; W 15 L	441	1080	479	3240	525	STD	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											65	1110	1300	1490	1655	1820	1960	2175	2360
											50	1170	1365	1565	1740	1910	2060	2285	2480
											40	1215	1420	1625	1805	1985	2140	2370	2575
											30	1280	1495	1715	1905	2095	2255	2500	2715
											10 LT	1490	1745	1995	2220	2440	2630	2915	3165
											10 HT	1280	1495	1715	1905	2095	2255	2500	2715
∅ 24"	420/65 R 24	138 D/141 A8	W 13	W 11 ; W 12	418	1156	519	3468	550	STD	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											65	1110	1300	1490	1655	1820	1960	2175	2360
											50	1170	1365	1565	1740	1910	2060	2285	2480
											40	1215	1420	1625	1805	1985	2140	2370	2575
											30	1280	1495	1715	1905	2095	2255	2500	2715
											10 LT	1490	1745	1995	2220	2440	2630	2915	3165
											10 HT	1280	1495	1715	1905	2095	2255	2500	2715

Technology

High Speed

Performance

Reduced Soil Compaction

Handling & Comfort

Fuel Economy

Traction

High Load Capacity

STD: Standard

AGRIMAX RT 657 (R-1W)

∅ 24"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire) km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
	440/65 R 24	135 D/138 A8	W 14 L	W 13 ; W 15 L	441	1182	538	3546	575	STD	**65**	1050	1225	1375	1530	1680	1810	2010	2180
											50	1100	1285	1445	1605	1765	1905	2110	2290
											40	1135	1325	1490	1655	1820	1960	2175	2360
											30	1205	1410	1585	1760	1935	2085	2310	2510
											10 LT	1405	1640	1845	2050	2255	2430	2695	2925
											10 HT	1205	1410	1585	1760	1935	2085	2310	2510
	440/65 R 24	135 D/138 A8	W 14 L	W 13 ; W 15 L	441	1182	538	3546	575	SPL	**65**	1050	1225	1375	1530	1680	1810	2010	2180
											50	1100	1285	1445	1605	1765	1905	2110	2290
											40	1135	1325	1490	1655	1820	1960	2175	2360
											30	1205	1410	1585	1760	1935	2085	2310	2510
											10 LT	1405	1640	1845	2050	2255	2430	2695	2925
											10 HT	1205	1410	1585	1760	1935	2085	2310	2510
	480/65 R 24	140 D/143 A8	W 15 L	W 14 L	479	1234	562	3730	600	STD	**65**	1200	1400	1575	1750	1925	2075	2300	2500
											50	1260	1470	1655	1840	2025	2180	2415	2625
											40	1310	1530	1720	1910	2100	2265	2510	2725
											30	1380	1610	1815	2015	2215	2390	2645	2875
											10 LT	1610	1880	2115	2345	2580	2785	3085	3350
											10 HT	1380	1610	1815	2015	2215	2390	2645	2875
	480/65 R 24	140 D/143 A8	W 15 L	W 14 L	479	1234	562	3730	600	SPL	**65**	1200	1400	1575	1750	1925	2075	2300	2500
											50	1260	1470	1655	1840	2025	2180	2415	2625
											40	1310	1530	1720	1910	2100	2265	2510	2725
											30	1380	1610	1815	2015	2215	2390	2645	2875
											10 LT	1610	1880	2115	2345	2580	2785	3085	3350
											10 HT	1380	1610	1815	2015	2215	2390	2645	2875
	540/65 R 24	146 D/149 A8	W 16 L	W 18 L	530	1312	590	3930	625	STD	**65**	1440	1680	1890	2100	2310	2490	2760	3000
											50	1515	1765	1985	2205	2430	2615	2900	3150
											40	1560	1820	2050	2275	2505	2700	2990	3250
											30	1660	1935	2175	2415	2660	2865	3175	3450
											10 LT	1930	2255	2535	2815	3100	3340	3700	4020
											10 HT	1660	1935	2175	2415	2660	2865	3175	3450
∅ 28"	**420/65 R 28**	135 D/138 A8	W 13	W 12 ; W 11	418	1257	584	3927	600	STD	**65**	1025	1180	1355	1530	1705	1875	2030	2180
											50	1080	1240	1420	1605	1790	1970	2130	2290
											40	1110	1275	1465	1655	1845	2030	2195	2360
											25	1215	1400	1605	1810	2020	2225	2405	2585
											10	1540	1770	2030	2290	2555	2815	3045	3270
	440/65 R 28	138 D/141 A8	W 14 L	W 13 ; W 15 L	441	1283	590	3927	625	STD	**65**	1135	1325	1490	1655	1820	1960	2175	2360
											50	1195	1390	1565	1740	1910	2060	2285	2480
											40	1240	1445	1625	1805	1985	2140	2370	2575
											30	1305	1525	1715	1905	2095	2255	2500	2715
											10 LT	1520	1775	1995	2220	2440	2630	2915	3165
											10 HT	1305	1525	1715	1905	2095	2255	2500	2715
	480/65 R 28	142 D/145 A8	W 15 L	W 14 L	479	1335	610	4091	650	STD	**65**	1275	1485	1670	1855	2045	2200	2440	2650
											50	1340	1560	1755	1950	2145	2315	2565	2785
											40	1395	1625	1830	2030	2235	2410	2670	2900
											30	1465	1710	1925	2135	2350	2535	2810	3050
											10 LT	1710	1995	2240	2490	2740	2955	3275	3555
											10 HT	1465	1710	1925	2135	2350	2535	2810	3050

STD: Standard - SPL: Special

Technology

High Speed

Performance

Reduced Soil Compaction

Handling & Comfort

Fuel Economy

Traction

High Load Capacity

AGRIMAX RT 657 (R-1W)

∅ 28"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	540/65 R 28	149 D/152 A8	W 16 L	W 18 L	530	1413	643	4253	675	STD
	540/65 R 28	149 D/152 A8	W 16 L	W 18 L	530	1413	643	4253	675	SPL
	600/65 R 28	154 D/157 A8	DW 20 B	W 18 L	611	1491	670	4470	700	STD
∅ 30"	420/65 R 30	136 D/139 A8	W 13	W 12 ; W 11	418	1308	606	3952	625	STD
	540/65 R 30	150 D/153 A8	W 16 L	W 18 L	530	1464	670	4403	700	STD
	540/65 R 30	150 D/153 A8	W 16 L	W 18 L	530	1464	670	4403	700	SPL
	600/65 R 30	155 D/158 A8	DW 20 B	W 18 L	611	1542	697	4609	725	STD
∅ 34"	540/65 R 34	152 D/155 A8	W 16 L	W 18 L	530	1566	712	4742	750	STD

Load capacity (kg/tire)

540/65 R 28 (STD)	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
65	1560	1820	2050	2275	2505	2700	2990	3250
50	1640	1915	2155	2395	2630	2835	3145	3415
40	1705	1990	2240	2485	2735	2950	3270	3550
30	1800	2095	2360	2620	2880	3105	3445	3740
10 LT	2095	2440	2745	3050	3355	3615	4010	4355
10 HT	1800	2095	2360	2620	2880	3105	3445	3740

540/65 R 28 (SPL)	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
65	1560	1820	2050	2275	2505	2700	2990	3250
50	1640	1915	2155	2395	2630	2835	3145	3415
40	1705	1990	2240	2485	2735	2950	3270	3550
30	1800	2095	2360	2620	2880	3105	3445	3740
10 LT	2095	2440	2745	3050	3355	3615	4010	4355
10 HT	1800	2095	2360	2620	2880	3105	3445	3740

600/65 R 28 (STD)	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
65	1800	2100	2365	2625	2890	3115	3450	3750
50	1895	2210	2485	2760	3035	3275	3625	3940
40	1980	2310	2600	2890	3180	3425	3795	4125
30	2075	2420	2720	3025	3325	3585	3970	4315
10 LT	2415	2815	3170	3520	3870	4175	4625	5025
10 HT	2075	2420	2720	3025	3325	3585	3970	4315

420/65 R 30 (STD)	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
65	1055	1210	1390	1570	1750	1930	2085	2240
50	1110	1275	1465	1650	1840	2030	2195	2355
40	1145	1315	1510	1705	1900	2090	2260	2430
25	1250	1435	1650	1860	2075	2285	2470	2655
10	1580	1815	2085	2355	2625	2890	3125	3360

540/65 R 30 (STD)	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
65	1610	1880	2115	2345	2580	2785	3085	3350
50	1690	1975	2220	2465	2715	2925	3240	3520
40	1755	2045	2300	2555	2815	3030	3360	3650
30	1855	2160	2430	2700	2970	3200	3550	3855
10 LT	2160	2515	2830	3145	3460	3730	4135	4490
10 HT	1855	2160	2430	2700	2970	3200	3550	3855

540/65 R 30 (SPL)	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
65	1610	1880	2115	2345	2580	2785	3085	3350
50	1690	1975	2220	2465	2715	2925	3240	3520
40	1755	2045	2300	2555	2815	3030	3360	3650
30	1855	2160	2430	2700	2970	3200	3550	3855
10 LT	2160	2515	2830	3145	3460	3730	4135	4490
10 HT	1855	2160	2430	2700	2970	3200	3550	3855

600/65 R 30 (STD)	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
65	1860	2170	2445	2715	2985	3220	3565	3875
50	1955	2280	2565	2850	3135	3380	3745	4070
40	2040	2380	2680	2975	3275	3530	3910	4250
30	2145	2500	2810	3125	3435	3705	4105	4460
10 LT	2495	2910	3275	3640	4005	4315	4780	5195
10 HT	2145	2500	2810	3125	3435	3705	4105	4460

540/65 R 34 (STD)	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
65	1705	1990	2240	2485	2735	2950	3270	3550
50	1795	2090	2350	2615	2875	3100	3435	3730
40	1860	2170	2445	2715	2985	3220	3565	3875
30	1965	2290	2575	2860	3150	3395	3760	4085
10 LT	2285	2670	3000	3335	3670	3955	4380	4760
10 HT	1965	2290	2575	2860	3150	3395	3760	4085

STD: Standard - SPL: Special

Technology

High Speed

Performance

Reduced Soil Compaction

Handling & Comfort

Fuel Economy

Traction

High Load Capacity

AGRIMAX RT 657 (R-1W)

∅ 34"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire)								
											km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
	540/65 R 34	152 D/155 A8	W 16 L	W 18 L	530	1566	712	4742	750	SPL	65	1705	1990	2240	2485	2735	2950	3270	3550
											50	1795	2090	2350	2615	2875	3100	3435	3730
											40	1860	2170	2445	2715	2985	3220	3565	3875
											30	1965	2290	2575	2860	3150	3395	3760	4085
											10 LT	2285	2670	3000	3335	3670	3955	4380	4760
											10 HT	1965	2290	2575	2860	3150	3395	3760	4085
	600/65 R 34	157 D/160 A8	DW 20 B	W 18 L	611	1644	742	4960	775	STD	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											65	1980	2310	2600	2890	3180	3425	3795	4125
											50	2085	2430	2735	3035	3340	3600	3990	4335
											40	2160	2520	2835	3150	3465	3735	4140	4500
											30	2280	2660	2990	3325	3655	3940	4370	4745
											10 LT	2655	3100	3485	3875	4260	4590	5090	5530
											10 HT	2280	2660	2990	3325	3655	3940	4370	4745
	600/65 R 34	157 D/160 A8	DW 20 B	W 18 L	611	1644	742	4960	775	SPL	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											65	1980	2310	2600	2890	3180	3425	3795	4125
											50	2085	2430	2735	3035	3340	3600	3990	4335
											40	2160	2520	2835	3150	3465	3735	4140	4500
											30	2280	2660	2990	3325	3655	3940	4370	4745
											10 LT	2655	3100	3485	3875	4260	4590	5090	5530
											10 HT	2280	2660	2990	3325	3655	3940	4370	4745
∅ 38"	540/65 R 38	153 D/156 A8	W 16 L	W 18 L	530	1667	760	5059	800	STD	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											65	1755	2045	2300	2555	2815	3030	3360	3650
											50	1845	2150	2420	2685	2955	3185	3530	3835
											40	1920	2240	2520	2800	3080	3320	3680	4000
											30	2020	2355	2650	2940	3235	3490	3865	4200
											10 LT	2350	2745	3085	3430	3770	4065	4505	4895
											10 HT	2020	2355	2650	2940	3235	3490	3865	4200
	540/65 R 38	153 D/156 A8	W 16 L	W 18 L	530	1667	760	5059	800	SPL	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											65	1755	2045	2300	2555	2815	3030	3360	3650
											50	1845	2150	2420	2685	2955	3185	3530	3835
											40	1920	2240	2520	2800	3080	3320	3680	4000
											30	2020	2355	2650	2940	3235	3490	3865	4200
											10 LT	2350	2745	3085	3430	3770	4065	4505	4895
											10 HT	2020	2355	2650	2940	3235	3490	3865	4200
	600/65 R 38	159 D/162 A8	DW 20 B	W 18 L	611	1745	790	5247	825	STD	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											65	2100	2450	2760	3065	3370	3635	4025	4375
											50	2210	2575	2895	3220	3540	3815	4230	4595
											40	2280	2660	2995	3325	3660	3945	4370	4750
											30	2420	2820	3175	3525	3880	4180	4635	5035
											10 LT	2820	3285	3695	4110	4520	4870	5400	5865
											10 HT	2420	2820	3175	3525	3880	4180	4635	5035
	650/65 R 38	163 D/166 A8	DW 20 B	-	645	1811	830	5483	875	STD	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											65	2340	2730	3075	3415	3755	4050	4485	4875
											50	2460	2870	3230	3585	3945	4250	4715	5120
											40	2545	2970	3340	3710	4085	4400	4880	5300
											30	2695	3145	3535	3930	4320	4660	5165	5610
											10 LT	3140	3660	4120	4575	5035	5425	6015	6535
											10 HT	2695	3145	3535	3930	4320	4660	5165	5610
∅ 42"	650/65 R 42	165 D/168 A8	DW 20 B	-	645	1913	878	5853	925	STD	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											65	2475	2885	3245	3605	3970	4275	4740	5150
											50	2600	3030	3410	3790	4170	4495	4980	5410
											40	2690	3140	3530	3920	4315	4650	5155	5600
											30	2845	3320	3735	4150	4565	4920	5455	5925
											10 LT	3315	3870	4355	4835	5320	5735	6355	6905
											10 HT	2845	3320	3735	4150	4565	4920	5455	5925

STD: Standard - SPL: Special

Technology

High Speed

Performance

Reduced Soil Compaction

Handling & Comfort

Fuel Economy

Traction

High Load Capacity

Radial



AGRIMAX RT 765 (R-1W)

AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction and comfort on all surfaces at any time. This tire provides great self-cleaning properties and reduced soil compaction. Two sizes are available with steel-belted technology.

∅	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
∅ 16"	200/70 R 16	94 A8/B	W 6	-	197	686	313	2037	330	STD
	220/70 R 16	99 A8/B	W 7	W 8	221	715	324	2145	340	STD
	240/70 R 16	104 A8/B	W 8	W 8 L ; W 9 L	244	742	335	2176	350	STD
	260/70 R 16	109 A8/B	W 8	W 8 L ; W 9 L	258	770	346	2283	360	STD
	280/70 R 16	112 A8/B	W 9	W 8 ; W 8 L ; W 10	282	798	356	2370	390	STD
∅ 18"	280/70 R 18	114 A8/B	W 9	W 8 ; W 10	282	849	381	2547	410	STD
∅ 20"	260/70 R 20	113 A8/B	W 8	9 ; W 9	258	872	402	2639	410	STD
	260/70 R 20	113 A8/B	W 8	9 ; W 9	258	872	402	2639	410	SPL

Load capacity (kg/tire)

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	315	365	420	470	525	580	625	670
40	315	365	420	470	525	580	625	670
30	340	390	450	505	565	620	670	720
10 LT	425	490	560	630	705	775	840	900
10 HT	340	390	450	505	565	620	670	720

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	365	420	485	545	605	670	725	775
40	365	420	485	545	605	670	725	775
30	395	450	515	585	650	715	775	830
10 LT	490	656	645	730	815	895	970	1040
10 HT	395	450	515	585	650	715	775	830

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	425	490	560	630	705	775	840	900
40	425	490	560	630	705	775	840	900
30	455	525	600	680	755	830	900	965
10 LT	570	655	755	850	945	1045	1130	1210
10 HT	455	525	600	680	755	830	900	965

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	485	560	640	725	805	890	960	1030
40	485	560	640	725	805	890	960	1030
30	520	600	690	775	865	955	1030	1105
10 LT	650	750	860	970	1080	1190	1285	1380
10 HT	520	600	690	775	865	955	1030	1105

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	530	605	695	785	875	965	1045	1120
40	530	605	695	785	875	965	1045	1120
30	565	650	745	840	940	1035	1120	1200
10 LT	710	815	935	1055	1175	1295	1400	1505
10 HT	565	650	745	840	940	1035	1120	1200

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	555	640	735	830	925	1015	1100	1180
40	555	640	735	830	925	1015	1100	1180
30	595	685	785	890	990	1090	1180	1265
10 LT	745	860	985	1110	1240	1365	1475	1585
10 HT	595	685	785	890	990	1090	1180	1265

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	545	625	715	805	900	990	1070	1150
40	545	625	715	805	900	990	1070	1150
30	585	670	770	865	965	1065	1150	1235
10 LT	730	835	960	1085	1210	1330	1440	1545
10 HT	585	670	770	865	965	1065	1150	1235

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	545	625	715	805	900	990	1070	1150
40	545	625	715	805	900	990	1070	1150
30	585	670	770	865	965	1065	1150	1235
10 LT	730	835	960	1085	1210	1330	1440	1545
10 HT	585	670	770	865	965	1065	1150	1235

Technology

High Speed

Steel Belted

Performance

Traction

Self-Cleaning

Reduced Soil Compaction

High Load Capacity

Handling & Comfort

STD: Standard - SPL: Special

AGRIMAX RT 765 (R-1W)

∅ 20"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	280/70 R 20	116 A8/B	W 9	W 10	282	900	408	2705	450	STD
	280/70 R 20	116 A8/B	W 9	W 10	282	900	408	2705	450	SPL
	300/70 R 20	120 A8/B	W 9	W 10	295	952	428	2854	450	STD
	320/70 R 20	123 A8/B	W 10	W 9 ; W 11	319	982	445	2965	475	STD
	360/70 R 20	129 A8/B	W 11	W 10 ; W 12	357	1042	469	3122	500	STD
	380/70 R 20	132 A8/B	W 12	W 11 ; W 13	380	1082	482	3213	525	STD
∅ 24"	**320/70 R 24**	116 A8/B	W 10	W 9 ; W 11	319	1094	502	3245	525	STD
	320/70 R 24	116 A8/B	W 10	W 9 ; W 11	319	1094	502	3245	525	SPL
	320/70 R 24	116 D	W 10	W 9 ; W 11	319	1094	502	3245	525	STD

Load capacity (kg/tire)

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	590	675	775	875	975	1075	1165	1250
40	590	675	775	875	975	1075	1165	1250
30	630	725	835	940	1050	1155	1250	1340
10 LT	790	905	1040	1175	1310	1445	1560	1675
10 HT	630	725	835	940	1050	1155	1250	1340

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	590	675	775	875	975	1075	1165	1250
40	590	675	775	875	975	1075	1165	1250
30	630	725	835	940	1050	1155	1250	1340
10 LT	790	905	1040	1175	1310	1445	1560	1675
10 HT	630	725	835	940	1050	1155	1250	1340

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	660	760	870	980	1095	1205	1305	1400
40	660	760	870	980	1095	1205	1305	1400
30	705	810	930	1050	1170	1290	1395	1500
10 LT	885	1020	1170	1320	1470	1620	1750	1880
10 HT	705	810	930	1050	1170	1290	1395	1500

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	730	840	965	1085	1210	1335	1445	1550
40	730	840	965	1085	1210	1335	1445	1550
30	785	900	1030	1165	1295	1430	1545	1660
10 LT	980	1125	1290	1460	1625	1790	1935	2080
10 HT	785	900	1030	1165	1295	1430	1545	1660

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	870	1000	1150	1295	1445	1595	1725	1850
40	870	1000	1150	1295	1445	1595	1725	1850
30	935	1070	1230	1390	1545	1705	1845	1980
10 LT	1170	1340	1540	1740	1935	2135	2310	2480
10 HT	935	1070	1230	1390	1545	1705	1845	1980

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	940	1080	1240	1400	1560	1720	1860	2000
40	940	1080	1240	1400	1560	1720	1860	2000
30	1010	1160	1330	1500	1670	1845	1995	2140
10 LT	1260	1450	1665	1880	2095	2305	2495	2680
10 HT	1010	1160	1330	1500	1670	1845	1995	2140

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	690	800	915	1025	1140	1250
40	690	800	915	1025	1140	1250
30	740	860	980	1100	1220	1340
10 LT	925	1075	1225	1375	1525	1675
10 HT	740	860	980	1100	1220	1340

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	690	800	915	1025	1140	1250
40	690	800	915	1025	1140	1250
30	740	860	980	1100	1220	1340
10 LT	925	1075	1225	1375	1525	1675
10 HT	740	860	980	1100	1220	1340

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	690	800	915	1025	1140	1250
50	725	845	960	1080	1200	1315
40	755	880	1005	1125	1250	1370
30	795	925	1055	1185	1315	1440
10 LT	925	1075	1225	1375	1525	1675
10 HT	795	925	10558	1185	1315	1440

STD: Standard - SPL: Special

Technology

- High Speed
- Steel Belted

Performance

- Traction
- Self-Cleaning
- Reduced Soil Compaction
- High Load Capacity
- Handling & Comfort

AGRIMAX RT 765 (R-1W)

∅ 24" Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
320/70 R 24	116 D	W 10	W 9 ; W 11	319	1094	502	3245	525	SPL
360/70 R 24	122 A8/B	W 11	W 10 ; W 12	357	1152	519	3450	550	STD
360/70 R 24	122 A8/B	W 11	W 10 ; W 12	357	1152	519	3450	550	SPL
360/70 R 24	122 D	W 11	W 10 ; W 12	357	1152	519	3450	550	STD
360/70 R 24	122 D	W 11	W 10 ; W 12	357	1152	519	3450	550	SPL
380/70 R 24	125 A8/B	W 12	W 11 ; W 13	380	1190	538	3560	575	STD
380/70 R 24	125 A8/B	W 12	W 11 ; W 13	380	1190	538	3560	575	SPL
380/70 R 24	125 D	W 12	W 11 ; W 13	380	1190	538	3560	575	STD
380/70 R 24	125 D	W 12	W 11 ; W 13	380	1190	538	3560	575	SPL

Load capacity (kg/tire)

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	690	800	915	1025	1140	1250
50	725	845	960	1080	1200	1315
40	755	880	1005	1125	1250	1370
30	795	925	1055	1185	1315	1440
10 LT	925	1075	1225	1375	1525	1675
10 HT	795	925	1055	1185	1315	1440

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	825	960	1095	1230	1365	1500
40	825	960	1095	1230	1365	1500
30	885	1030	1175	1320	1465	1605
10 LT	1110	1290	1470	1650	1830	2010
10 HT	885	1030	1175	1320	1465	1605

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	825	960	1095	1230	1365	1500
40	825	960	1095	1230	1365	1500
30	885	1030	1175	1320	1465	1605
10 LT	1110	1290	1470	1650	1830	2010
10 HT	885	1030	1175	1320	1465	1605

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	825	960	1095	1230	1365	1500
50	870	1010	1150	1295	1435	1575
40	905	1055	1205	1350	1500	1645
30	950	1105	1260	1415	1570	1725
10 LT	1110	1290	1470	1650	1830	2010
10 HT	950	1105	1260	1415	1570	1725

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	825	960	1095	1230	1365	1500
50	870	1010	1150	1295	1435	1575
40	905	1055	1205	1350	1500	1645
30	950	1105	1260	1415	1570	1725
10 LT	1110	1290	1470	1650	1830	2010
10 HT	950	1105	1260	1415	1570	1725

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	910	1060	1205	1355	1505	1650
40	910	1060	1205	1355	1505	1650
30	975	1135	1295	1455	1615	1770
10 LT	1220	1420	1620	1820	2020	2215
10 HT	975	1135	1295	1455	1615	1770

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	910	1060	1205	1355	1505	1650
40	910	1060	1205	1355	1505	1650
30	975	1135	1295	1455	1615	1770
10 LT	1220	1420	1620	1820	2020	2215
10 HT	975	1135	1295	1455	1615	1770

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	910	1060	1205	1355	1505	1650
50	955	1115	1270	1425	1580	1735
40	1000	1160	1325	1485	1650	1810
30	1045	1220	1390	1560	1730	1900
10 LT	1220	1420	1620	1820	2020	2215
10 HT	1045	1220	1390	1560	1730	1900

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	910	1060	1205	1355	1505	1650
50	955	1115	1270	1425	1580	1735
40	1000	1160	1325	1485	1650	1810
30	1045	1220	1390	1560	1730	1900
10 LT	1220	1420	1620	1820	2020	2215
10 HT	1045	1220	1390	1560	1730	1900

Technology

- High Speed
- Steel Belted

Performance

- Traction
- Self-Cleaning
- Reduced Soil Compaction
- High Load Capacity
- Handling & Comfort

STD: Standard - SPL: Special

AGRIMAX RT 765 (R-1W)

∅ 24" Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
420/70 R 24	130 A8/B	W 13	W 12 ; W 14 L	418	1248	554	3680	600	STD

Load capacity (kg/tire)						
km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1045	1220	1390	1560	1730	1900
40	1045	1220	1390	1560	1730	1900
30	1120	1305	1490	1670	1855	2035
10 LT	1405	1635	1865	2095	2325	2550
10 HT	1120	1305	1490	1670	1855	2035

∅ 24" Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
420/70 R 24	130 A8/B	W 13	W 12 ; W 14 L	418	1248	554	3680	600	SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1045	1220	1390	1560	1730	1900
40	1045	1220	1390	1560	1730	1900
30	1120	1305	1490	1670	1855	2035
10 LT	1405	1635	1865	2095	2325	2550
10 HT	1120	1305	1490	1670	1855	2035

∅ 24" Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
420/70 R 24	130 D	W 13	W 12 ; W 14 L	418	1248	554	3680	600	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	1045	1220	1390	1560	1730	1900
50	1100	1280	1460	1640	1820	1995
40	1150	1335	1525	1710	1900	2085
30	1205	1400	1600	1795	1990	2185
10 LT	1405	1635	1865	2095	2325	2550
10 HT	1205	1400	1600	1795	1990	2185

∅ 24" Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
420/70 R 24	130 D	W 13	W 12 ; W 14 L	418	1248	554	3680	600	SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	1045	1220	1390	1560	1730	1900
50	1100	1280	1460	1640	1820	1995
40	1150	1335	1525	1710	1900	2085
30	1205	1400	1600	1795	1990	2185
10 LT	1405	1635	1865	2095	2325	2550
10 HT	1205	1400	1600	1795	1990	2185

∅ 24" Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
420/70 R 24	134 D	W 13	W 12 ; W 14 L	418	1248	554	3680	600	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0
65	1060	1230	1400	1590	1760	1930	2120
50	1115	1295	1475	1675	1855	2030	2230
40	1165	1350	1535	1745	1930	2120	2325
30	1220	1420	1615	1830	2030	2225	2440
10 LT	1425	1655	1880	2135	2365	2590	2745
10 HT	1220	1420	1615	1830	2030	2225	2440

∅ 24" Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
420/70 R 24	134 D	W 13	W 12 ; W 14 L	418	1248	554	3680	600	SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0
65	1060	1230	1400	1590	1760	1930	2120
50	1115	1295	1475	1675	1855	2030	2230
40	1165	1350	1535	1745	1930	2120	2325
30	1220	1420	1615	1830	2030	2225	2440
10 LT	1425	1655	1880	2135	2365	2590	2845
10 HT	1220	1420	1615	1830	2030	2225	2440

∅ 24" Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
480/70 R 24	138 A8/B	W 15 L	W 14 L ; W 16 L	479	1316	580	3894	625	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1300	1515	1725	1940	2150	2360
40	1300	1515	1725	1940	2150	2360
30	1390	1620	1845	2075	2300	2525
10 LT	1740	2025	2310	2595	2880	3165
10 HT	1390	1620	1845	2075	2300	2525

∅ 24" Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
480/70 R 24	138 A8/B	W 15 L	W 14 L ; W 16 L	479	1316	580	3894	625	SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1300	1515	1725	1940	2150	2360
40	1300	1515	1725	1940	2150	2360
30	1390	1620	1845	2075	2300	2525
10 LT	1740	2025	2310	2595	2880	3165
10 HT	1390	1620	1845	2075	2300	2525

∅ 24" Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
480/70 R 24	138 D	W 15 L	W 14 L ; W 16 L	479	1316	580	3894	625	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	1300	1515	1725	1940	2150	2360
50	1365	1590	1815	2035	2260	2480
40	1425	1655	1890	2120	2355	2585
30	1495	1740	1985	2230	2475	2715
10 LT	1745	2030	2315	2600	2885	3165
10 HT	1495	1740	1985	2230	2475	2715

STD: Standard - SPL: Special

Technology

- High Speed
- Steel Belted

Performance

- Traction
- Self-Cleaning
- Reduced Soil Compaction
- High Load Capacity
- Handling & Comfort

AGRIMAX RT 765 (R-1W)

∅ 24"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	480/70 R 24	138 D	W 15 L	W 14 L ; W 16 L	479	1316	580	3894	625	SPL

Load capacity (kg/tire)

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	1300	1515	1725	1940	2150	2360
50	1365	1590	1815	2035	2260	2480
40	1425	1655	1890	2120	2355	2585
30	1495	1740	1985	2230	2475	2715
10 LT	1745	2030	2315	2600	2885	3165
10 HT	1495	1740	1985	2230	2475	2715

∅ 28"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	360/70 R 28	125 A8/B	W 11	W 10 ; W 12	357	1251	579	3767	600	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	910	1060	1205	1355	1505	1650
40	910	1060	1205	1355	1505	1650
30	975	1135	1295	1455	1615	1770
10 LT	1220	1420	1620	1820	2020	2215
10 HT	975	1135	1295	1455	1615	1770

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	360/70 R 28	125 A8/B	W 11	W 10 ; W 12	357	1251	579	3767	600	SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	910	1060	1205	1355	1505	1650
40	910	1060	1205	1355	1505	1650
30	975	1135	1295	1455	1615	1770
10 LT	1220	1420	1620	1820	2020	2215
10 HT	975	1135	1295	1455	1615	1770

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	360/70 R 28	125 D	W 11	W 10 ; W 12	357	1251	579	3767	600	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	910	1060	1205	1355	1505	1650
50	955	1115	1270	1425	1580	1735
40	1000	1160	1325	1485	1650	1810
30	1045	1220	1390	1560	1730	1900
10 LT	1220	1420	1620	1820	2020	2215
10 HT	1045	1220	1390	1560	1730	1900

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	360/70 R 28	125 D	W 11	W 10 ; W 12	357	1251	579	3767	600	SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	910	1060	1205	1355	1505	1650
50	955	1115	1270	1425	1580	1735
40	1000	1160	1325	1485	1650	1810
30	1045	1220	1390	1560	1730	1900
10 LT	1220	1420	1620	1820	2020	2215
10 HT	1045	1220	1390	1560	1730	1900

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	380/70 R 28	127 A8/B	W 12	W 11 ; W 13	380	1293	586	3883	625	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	965	1120	1280	1435	1595	1750
40	965	1120	1280	1435	1595	1750
30	1035	1200	1370	1540	1710	1875
10 LT	1290	1505	1715	1925	2135	2345
10 HT	1035	1200	1370	1540	1710	1875

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	380/70 R 28	127 A8/B	W 12	W 11 ; W 13	380	1293	586	3883	625	SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	965	1120	1280	1435	1595	1750
40	965	1120	1280	1435	1595	1750
30	1035	1200	1370	1540	1710	1875
10 LT	1290	1505	1715	1925	2135	2345
10 HT	1035	1200	1370	1540	1710	1875

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	380/70 R 28	127 D	W 12	W 11 ; W 13	380	1293	586	3883	625	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	965	1120	1280	1435	1595	1750
50	1015	1180	1345	1510	1675	1840
40	1060	1230	1405	1575	1750	1920
30	1110	1290	1475	1655	1835	2015
10 LT	1290	1505	1715	1925	2135	2345
10 HT	1110	1290	1475	1655	1835	2015

STD: Standard - SPL: Special

Technology

High Speed

Steel Belted

Performance

Traction

Self-Cleaning

Reduced Soil Compaction

High Load Capacity

Handling & Comfort

AGRIMAX RT 765 (R-1W)

∅ 28"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	420/70 R 28	133 A8/B	W 13	W 12 ; W 14 L	418	1349	604	4020	650	SPL

Load capacity (kg/tire)						
km/h - bar	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
65	965	1120	1280	1435	1595	1750
50	1015	1180	1345	1510	1675	1840
40	1060	1230	1405	1575	1750	1920
30	1110	1290	1475	1655	1835	2015
10 LT	1290	1505	1715	1925	2135	2345
10 HT	1110	1290	1475	1655	1835	2015

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	420/70 R 28	133 A8/B	W 13	W 12 ; W 14 L	418	1349	604	4020	650	STD

Load capacity (kg/tire)						
km/h - bar	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
50	1135	1320	1505	1690	1875	2060
40	1135	1320	1505	1690	1875	2060
30	1215	1415	1610	1810	2010	2205
10 LT	1525	1770	2020	2270	2520	2765
10 HT	1215	1415	1610	1810	2010	2205

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	420/70 R 28	133 A8/B	W 13	W 12 ; W 14 L	418	1349	604	4020	650	SPL

Load capacity (kg/tire)						
km/h - bar	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
50	1135	1320	1505	1690	1875	2060
40	1135	1320	1505	1690	1875	2060
30	1215	1415	1610	1810	2010	2205
10 LT	1525	1770	2020	2270	2520	2765
10 HT	1215	1415	1610	1810	2010	2205

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	420/70 R 28	133 D	W 13	W 12 ; W 14 L	418	1349	604	4020	650	STD

Load capacity (kg/tire)						
km/h - bar	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
65	1135	1320	1505	1690	1875	2060
50	1195	1390	1585	1780	1975	2165
40	1245	1450	1650	1855	2060	2260
30	1305	1520	1735	1945	2160	2370
10 LT	1525	1770	2020	2270	2520	2765
10 HT	1305	1520	1735	1945	2160	2370

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	420/70 R 28	133 D	W 13	W 12 ; W 14 L	418	1349	604	4020	650	SPL

Load capacity (kg/tire)						
km/h - bar	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
65	1135	1320	1505	1690	1875	2060
50	1195	1390	1585	1780	1975	2165
40	1245	1450	1650	1855	2060	2260
30	1305	1520	1735	1945	2160	2370
10 LT	1525	1770	2020	2270	2520	2765
10 HT	1305	1520	1735	1945	2160	2370

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	480/70 R 28	140 A8/B	W 15 L	W 14 L ; W 16 L	479	1421	634	4183	675	STD

Load capacity (kg/tire)						
km/h - bar	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
50	1375	1600	1825	2050	2275	2500
40	1375	1600	1825	2050	2275	2500
30	1475	1715	1955	2195	2435	2675
10 LT	1845	2145	2450	2750	3050	3350
10 HT	1475	1715	1955	2195	2435	2675

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	480/70 R 28	140 A8/B	W 15 L	W 14 L ; W 16 L	479	1421	634	4183	675	SPL

Load capacity (kg/tire)						
km/h - bar	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
50	1375	1600	1825	2050	2275	2500
40	1375	1600	1825	2050	2275	2500
30	1475	1715	1955	2195	2435	2675
10 LT	1845	2145	2450	2750	3050	3350
10 HT	1475	1715	1955	2195	2435	2675

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	480/70 R 28	140 D	W 15 L	W 14 L ; W 16 L	479	1421	634	4183	675	STD

Load capacity (kg/tire)						
km/h - bar	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
65	1375	1600	1825	2050	2275	2500
50	1445	1680	1920	2155	2390	2625
40	1510	1755	2005	2250	2495	2740
30	1585	1840	2100	2360	2620	2875
10 LT	1845	2145	2450	2750	3050	3350
10 HT	1585	1840	2100	2360	2620	2875

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	480/70 R 28	140 D	W 15 L	W 14 L ; W 16 L	479	1421	634	4183	675	SPL

Load capacity (kg/tire)						
km/h - bar	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
65	1375	1600	1825	2050	2275	2500
50	1445	1680	1920	2155	2390	2625
40	1510	1755	2005	2250	2495	2740
30	1585	1840	2100	2360	2620	2875
10 LT	1845	2145	2450	2750	3050	3350
10 HT	1585	1840	2100	2360	2620	2875

Technology

- *High Speed*
- *Steel Belted*

Performance

- *Traction*
- *Self-Cleaning*
- *Reduced Soil Compaction*
- *High Load Capacity*
- *Handling & Comfort*

STD: Standard - SPL: Special

AGRIMAX RT 765 (R-1W)

∅ 30"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	420/70 R 30	134 D	W 13	W 12 ; W 14 L	418	1398	631	4172	675	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1170	1360	1550	1740	1930	2120
40	1170	1360	1550	1740	1930	2120
30	1250	1455	1660	1865	2070	2270
10 LT	1565	1825	2080	2335	2590	2845
10 HT	1250	1455	1660	1865	2070	2270

	420/70 R 30	134 A8/B	W 13	W 12 ; W 14 L	418	1398	631	4172	675	SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1170	1360	1550	1740	1930	2120
40	1170	1360	1550	1740	1930	2120
30	1250	1455	1660	1865	2070	2270
10 LT	1565	1825	2080	2335	2590	2845
10 HT	1250	1455	1660	1865	2070	2270

	420/70 R 30	134 D	W 13	W 12 ; W 14 L	418	1398	631	4172	675	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	1170	1360	1550	1740	1930	2120
50	1230	1430	1630	1830	2030	2230
40	1280	1490	1700	1910	2120	2325
30	1345	1565	1785	2005	2225	2440
10 LT	1565	1825	2080	2335	2590	2845
10 HT	1345	1565	1785	2005	2225	2440

	420/70 R 30	134 D	W 13	W 12 ; W 14 L	418	1398	631	4172	675	SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	1170	1360	1550	1740	1930	2120
50	1230	1430	1630	1830	2030	2230
40	1280	1490	1700	1910	2120	2325
30	1345	1565	1785	2005	2225	2440
10 LT	1565	1825	2080	2335	2590	2845
10 HT	1345	1565	1785	2005	2225	2440

	480/70 R 30	141 A8/B	W 15 L	W 14 L ; W 16 L	479	1478	659	4372	700	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1420	1650	1880	2115	2345	2575
40	1420	1650	1880	2115	2345	2575
30	1520	1770	2015	2265	2515	2760
10 LT	1905	2215	2525	2835	3145	3455
10 HT	1520	1770	2015	2265	2515	2760

	480/70 R 30	141 A8/B	W 15 L	W 14 L ; W 16 L	479	1478	659	4372	700	SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1420	1650	1880	2115	2345	2575
40	1420	1650	1880	2115	2345	2575
30	1520	1770	2015	2265	2515	2760
10 LT	1905	2215	2525	2835	3145	3455
10 HT	1520	1770	2015	2265	2515	2760

	480/70 R 30	141 D	W 15 L	W 14 L ; W 16 L	479	1478	659	4372	700	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	1420	1650	1880	2115	2345	2575
50	1490	1735	1975	2220	2465	2705
40	1555	1805	2060	2315	2570	2820
30	1635	1900	2165	2435	2700	2965
10 LT	1905	2215	2525	2835	3145	3455
10 HT	1635	1900	2165	2435	2700	2965

	480/70 R 30	141 D	W 15 L	W 14 L ; W 16 L	479	1478	659	4372	700	SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	1420	1650	1880	2115	2345	2575
50	1490	1735	1975	2220	2465	2705
40	1555	1805	2060	2315	2570	2820
30	1635	1900	2165	2435	2700	2965
10 LT	1905	2215	2525	2835	3145	3455
10 HT	1635	1900	2165	2435	2700	2965

	600/70 R 30	152 A8/B	DW 20 B	DW 18 L ; W 18 L	591	1602	711	4774	750	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1955	2275	2595	2915	3235	3550
40	1955	2275	2595	2915	3235	3550
30	2090	2435	2775	3120	3460	3800
10 LT	2620	3050	3475	3905	4335	4760
10 HT	2090	2435	2775	3120	3460	3800

STD: Standard - SPL: Special

Technology

- High Speed
- Steel Belted

Performance

- Traction
- Self-Cleaning
- Reduced Soil Compaction
- High Load Capacity
- Handling & Comfort

AGRIMAX RT 765 (R-1W)

∅ 30"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	600/70 R 30	152 D	DW 20 B	DW 18 L ; W 18 L	591	1602	711	4774	750	STD
	600/70 R 30	152 D	DW 20 B	DW 18 L ; W 18 L	591	1602	711	4774	750	SPL
∅ 34"	480/70 R 34	149 A8/B	W 15 L	W 14 L ; W 16 L	479	1580	711	4759	750	STD
	480/70 R 34	149 A8/B	W 15 L	W 14 L ; W 16 L	479	1580	711	4759	750	SPL
	480/70 R 34	149 D	W 15 L	W 14 L ; W 16 L	479	1580	711	4759	750	STD
	480/70 R 34	149 D	W 15 L	W 14 L ; W 16 L	479	1580	711	4759	750	SPL
	480/70 R 34	155 A8/B	W 15 L	W 14 L ; W 16 L	479	1580	711	4759	750	STD
	480/70 R 34	155 D	W 15 L	W 14 L ; W 16 L	479	1580	711	4759	750	STD

Load capacity (kg/tire)

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
65	1955	2275	2595	2915	3235	3550				
50	2055	2390	2725	3060	3395	3730				
40	2140	2490	2840	3190	3540	3890				
30	2250	2615	2985	3350	3720	4085				
10 LT	2620	3050	3475	3905	4335	4760				
10 HT	2250	2615	2985	3350	3720	4085				

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
65	1955	2275	2595	2915	3235	3550				
50	2055	2390	2725	3060	3395	3730				
40	2140	2490	2840	3190	3540	3890				
30	2250	2615	2985	3350	3720	4085				
10 LT	2620	3050	3475	3905	4335	4760				
10 HT	2250	2615	2985	3350	3720	4085				

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
50	1530	1755	2015	2275	2535	2795	3025	3250		
40	1530	1755	2015	2275	2535	2795	3025	3250		
30	1640	1880	2160	2440	2715	2995	3240	3480		
10 LT	2050	2355	2705	3050	3400	3750	4055	4355		
10 HT	1640	1880	2160	2440	2715	2995	3240	3480		

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
50	1530	1755	2015	2275	2535	2795	3025	3250		
40	1530	1755	2015	2275	2535	2795	3025	3250		
30	1640	1880	2160	2440	2715	2995	3240	3480		
10 LT	2050	2355	2705	3050	3400	3750	4055	4355		
10 HT	1640	1880	2160	2440	2715	2995	3240	3480		

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
65	1530	1755	2015	2275	2535	2795	3055	3250		
50	1610	1845	2120	2395	2665	2940	3215	3415		
40	1675	1925	2210	2495	2780	3065	3350	3560		
30	1760	2020	2320	2620	2920	3220	3520	3740		
10 LT	2050	2355	2705	3050	3400	3750	4095	4355		
10 HT	1760	2020	2320	2620	2920	3220	3520	3740		

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
65	1530	1755	2015	2275	2535	2795	3055	3250		
50	1610	1845	2120	2395	2665	2940	3215	3415		
40	1675	1925	2210	2495	2780	3065	3350	3560		
30	1760	2020	2320	2620	2920	3220	3520	3740		
10 LT	2050	2355	2705	3050	3400	3750	4095	4355		
10 HT	1760	2020	2320	2620	2920	3220	3520	3740		

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
50	1530	1755	2015	2275	2535	2795	3025	3250	3605	3875
40	1530	1755	2015	2275	2535	2795	3025	3250	3605	3875
30	1640	1880	2160	2440	2715	2995	3240	3480	3860	4150
10 LT	2050	2355	2705	3050	3400	3750	4055	4355	4835	5195
10 HT	1640	1880	2160	2440	2715	2995	3240	3480	3860	4150

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
65	1480	1745	2010	2235	2500	2730	2995	3220	3525	3785
50	1555	1830	2110	2350	2625	2865	3145	3380	3700	3975
40	1620	1910	2200	2450	2740	2985	3275	3525	3855	4145
30	1700	2005	2310	2570	2785	3140	3445	3705	4055	4355
10 LT	1980	2335	2690	2995	3350	3655	4010	4315	4720	5075
10 HT	1700	2005	2310	2570	2875	3140	3445	3705	4055	4355

STD: Standard - SPL: Special

Technology

High Speed

Steel Belted

Performance

Traction

Self-Cleaning

Reduced Soil Compaction

High Load Capacity

Handling & Comfort

AGRIMAX RT 765 (R-1W)

∅	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire)
34"	**480/70 R 34**	155 D	W 15 L	W 14 L ; W 16 L	479	1580	711	4759	750	SPL	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
65	1480	1745	2010	2235	2500	2730	2995	3220	3525	3785
50	1555	1830	2110	2350	2625	2865	3145	3380	3700	3975
40	1620	1910	2200	2450	2740	2985	3275	3525	3855	4145
30	1700	2005	2310	2570	2875	3140	3455	3705	4055	4355
10 LT	1980	2335	2690	2995	3550	3655	4010	4315	4720	5075
10 HT	1700	2005	2310	2570	2875	3140	3455	3705	4055	4355

	520/70 R 34	148 A8/B	W 16 L	W 15 L ; W 18 L	516	1640	739	4927	775	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1735	2020	2300	2585	2870	3150
40	1735	2020	2300	2585	2870	3150
30	1860	2160	2465	2770	3075	3375
10 LT	2325	2705	3085	3465	3845	4225
10 HT	1860	2160	2465	2770	3075	3375

	520/70 R 34	148 D	W 16 L	W 15 L ; W 18 L	516	1640	739	4927	775	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	1735	2020	2300	2585	2870	3150
50	1825	2120	2420	2715	3140	3310
40	1900	2210	2520	2830	3140	3450
30	1995	2320	2650	2975	3300	3625
10 LT	2325	2705	3085	3465	3845	4225
10 HT	1995	2320	2650	2975	3300	3625

	520/70 R 34	148 D	W 16 L	W 15 L ; W 18 L	516	1640	739	4927	775	SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	1735	2020	2300	2585	2870	3150
50	1825	2120	2420	2715	3140	3310
40	1900	2210	2520	2830	3140	3450
30	1995	2320	2650	2975	3300	3625
10 LT	2325	2705	3085	3465	3845	4225
10 HT	1995	2320	2650	2975	3300	3625

∅	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire)
38"	**480/70 R 38**	145 A8/B	W 15 L	W 14 L ; W 16 L	479	1681	764	5055	800	STD	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1595	1860	2120	2380	2640	2900
40	1595	1860	2120	2380	2640	2900
30	1710	1990	2270	2550	2830	3105
10 LT	2140	2490	2840	3190	3540	3890
10 HT	1710	1990	2270	2550	2830	3105

	480/70 R 38	145 A8/B	W 15 L	W 14 L ; W 16 L	479	1681	764	5055	800	SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1595	1860	2120	2380	2640	2900
40	1595	1860	2120	2380	2640	2900
30	1710	1990	2270	2550	2830	3105
10 LT	2140	2490	2840	3190	3540	3890
10 HT	1710	1990	2270	2550	2830	3105

	480/70 R 38	145 D	W 15 L	W 14 L ; W 16 L	479	1681	764	5055	800	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	1595	1860	2120	2380	2640	2900
50	1675	1950	2225	2500	2775	3045
40	1750	2040	2325	2610	2895	3180
30	1835	2135	2435	2735	3035	3335
10 LT	2140	2490	2840	3190	3540	3890
10 HT	1935	2135	2435	2735	3035	3335

	480/70 R 38	145 D	W 15 L	W 14 L ; W 16 L	479	1681	764	5055	800	SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	1595	1860	2120	2380	2640	2900
50	1675	1950	2225	2500	2775	3045
40	1750	2040	2325	2610	2895	3180
30	1835	2135	2435	2735	3035	3335
10 LT	2140	2490	2840	3190	3540	3890
10 HT	1835	2135	2435	2735	3035	3335

	520/70 R 38	150 A8/B	W 16 L	W 15 L ; W 18 L	516	1749	793	5300	825	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1845	2145	2450	2750	3050	3350
40	1845	2145	2450	2750	3050	3350
30	1975	2295	2620	2940	3265	3585
10 LT	2470	2875	3280	3685	4090	4490
10 HT	1975	2295	2620	2940	3265	3585

STD: Standard - SPL: Special

Technology

- High Speed
- Steel Belted

Performance

- Traction
- Self-Cleaning
- Reduced Soil Compaction
- High Load Capacity
- Handling & Comfort

AGRIMAX RT 765 (R-1W)

∅ 38"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	520/70 R 38	150 D	W 16 L	W 15 L ; W 18 L	516	1749	793	5300	825	SPL

Load capacity (kg/tire)						
km/h - bar	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
65	1845	2145	2450	2750	3050	3350
50	1940	2255	2570	2890	3205	3520
40	2020	2350	2680	3010	3340	3670
30	2125	2470	2815	3165	3510	3855
10 LT	2470	2875	3280	3685	4090	4490
10 HT	2125	2470	2815	3165	2510	3855

	580/70 R 38	155 A8/B	W 18 L	-	577	1827	821	5505	875	STD

km/h - bar	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
50	2135	2480	2830	3180	3530	3875
40	2135	2480	2830	3180	3530	3875
30	2285	2660	3030	3405	3780	4150
10 LT	2860	3325	3795	4260	4730	5195
10 HT	2285	2660	3030	3405	3780	4150

	520/70 R 38	150 D	W 16 L	W 15 L ; W 18 L	516	1749	793	5300	825	STD

km/h - bar	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
65	1845	2145	2450	2750	3050	3350
50	1940	2255	2570	2890	3205	3520
40	2020	2350	2680	3010	3340	3670
30	2125	2470	2815	3165	3510	3855
10 LT	2470	2875	3280	3685	4090	4490
10 HT	2125	2470	2815	3165	3510	3855

	580/70 R 38	155 D	W 18 L	-	577	1827	821	5505	875	STD

km/h - bar	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
65	2135	2480	2830	3180	3530	3875
50	2240	2605	2975	3340	3705	4070
40	2335	2720	3100	2485	3865	4245
30	2455	2855	3260	3660	4060	4460
10 LT	2860	3325	3795	4260	4730	5195
10 HT	2455	2855	3260	3660	4060	4460

	580/70 R 38	155 D	W 18 L	-	577	1827	821	5505	875	SPL

km/h - bar	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
65	2135	2480	2830	3180	3530	3875
50	2240	2605	2975	3340	3705	4070
40	2335	2720	3100	3485	3865	4245
30	2455	2855	3260	3660	4060	4460
10 LT	2860	3325	3795	4260	4730	5195
10 HT	2455	2855	3260	3660	4060	4460

	580/70 R 38	180 A8	W 18 L	-	577	1827	821	5505	875	SB

km/h - bar	**1.2**	**1.6**	**2.0**	**2.4**	**2.8**	**3.2**	**3.6**	**4.0**	**4.4**	**4.6**
50	3180	3875	4490	4990	5460	5890	6310	6710	7090	7280
40	3180	3875	4930	5480	6000	6470	6930	7370	7790	8000
30	3405	4150	5280	5860	6420	6920	7420	7890	8340	8560
25	3535	4305	5470	6080	6660	7180	7690	8180	8650	8880

	620/70 R 38	170 A8/B	DW 20 B	-	625	1833	828	5591	875	STD

km/h - bar	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**	**2.0**	**2.4**	**2.8**	**3.2**
50	2340	2760	3180	3540	3960	4320	4680	5100	5580	6000
40	2340	2760	3180	3540	3960	4320	4680	5100	5580	6000
30	2505	2955	3405	3790	4240	4625	5010	5460	5975	6420
10LT	3140	3700	4265	4745	5310	5790	6275	6835	7480	8040
10HT	2505	2955	3405	3790	4240	4625	5010	5460	5975	6420

	620/70 R 38	170 D	DW 20 B	-	625	1833	828	5591	875	STD

km/h - bar	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**	**2.0**	**2.4**	**2.8**	**3.2**
65	2340	2760	3180	3540	3960	4320	4740	5100	5580	6000
50	2460	2900	3340	3720	4160	4540	4980	5355	5860	6300
40	2565	3025	3485	3880	4340	4735	5195	5585	6115	6570
30	2695	3175	3660	4075	4555	4970	5455	5865	6420	6900
10 LT	3140	3700	4265	4745	5310	5790	6355	6835	7480	8040
10 HT	2695	3175	3660	4075	4555	4970	5455	5865	6420	6900

STD: Standard - SPL: Special - SB: Steel Belted

Technology

High Speed

Steel Belted

Performance

Traction

Self-Cleaning

Reduced Soil Compaction

High Load Capacity

Handling & Comfort

AGRIMAX RT 765 (R-1W)

∅ 38"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	620/70 R 38	170 D	DW 20 B	-	625	1833	828	5591	875	SPL
	650/75 R 38	169 D	DW 21 B	-	655	1941	874	5820	925	STD
	710/70 R 38	166 A8/B	DW 23 B	-	716	1959	859	5751	925	STD
	710/70 R 38	166 D	DW 23 B	-	716	1959	859	5751	925	STD
	710/70 R 38	166 D	DW 23 B	-	716	1959	859	5751	925	SPL
	710/70 R 38	171 D/174 A8	DW 23 B	-	716	1959	859	5751	925	STD
	710/70 R 38	175 D/178 A8	DW 23 B	-	716	1959	859	5751	925	STD
	710/70 R 38	175 D/178 A8	DW 23 B	-	716	1959	859	5751	925	SPL

Load capacity (kg/tire)

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
65	2340	2760	3180	3540	3960	4320	4740	5100	5580	6000
50	2460	2900	3340	3720	4160	4540	4980	5355	5860	6300
40	2565	3025	3485	3880	4340	4735	5195	5585	6155	6570
30	2695	3175	3660	4075	4555	4970	5455	5865	6420	6900
10 LT	3140	3700	4265	4745	5310	5790	6355	6835	7480	8040
10 HT	2695	3175	3660	4075	4555	4970	5455	5865	6420	6900

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
65	2730	3135	3600	4060	4525	4990	5455	5800
50	2865	3290	3780	4265	4755	5240	5725	6090
40	2990	3435	3945	4450	4960	5470	5975	6355
30	3135	3605	4140	4670	5205	5740	6270	6670
10 LT	3655	4200	4825	5445	6065	6690	7310	7775
10 HT	3135	3605	4140	4670	5205	5740	6270	6670

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	2915	3395	3870	4350	4825	5300
40	2915	3395	3870	4350	4825	5300
30	3125	3635	4145	4655	5165	5675
10 LT	3910	4550	5190	5830	6470	7105
10 HT	3125	3635	4145	4655	5165	5675

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	2915	3395	3870	4350	4825	5300
50	3065	3565	4065	4565	5065	5565
40	3195	3720	4240	4765	5285	5805
30	3355	3905	4450	5000	5550	6095
10 LT	3910	4550	5190	5830	6470	7105
10 HT	3355	3905	4450	5000	5550	6095

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	2915	3395	3870	4350	4825	5300
50	3065	3565	4065	4565	5065	5565
40	3195	3720	4240	4765	5285	5805
30	3355	3905	4450	5000	5550	6095
10 LT	3910	4550	5190	5830	6470	7105
10 HT	3355	3905	4450	5000	5550	6095

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
65	2895	3325	3815	4305	4800	5290	5785	6150
50	3040	3490	4010	4525	5040	5560	6075	6460
40	3150	3620	4155	4690	5230	5765	6300	6700
30	3330	3825	4390	4955	5520	6085	6655	7075
10 LT	3880	4455	5115	5775	6435	7095	7755	8245
10 HT	3330	3825	4390	4955	5520	6085	6655	7075

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
65	2695	3175	3660	4075	4555	4970	5455	5865	6420	6900
50	2830	3335	3840	4275	4785	5220	5725	6160	6740	7245
40	2925	3450	3975	4425	4950	5400	5925	6375	6975	7500
30	3095	3655	4210	4685	5240	5715	6270	6745	7380	7935
10 LT	3610	4255	4905	5460	6105	6660	7310	7865	8605	9250
10 HT	3095	3655	4210	4685	5240	5715	6270	6745	7380	7935

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
65	2695	3175	3660	4075	4555	4970	5455	5865	6420	6900
50	2830	3335	3840	4275	4785	5220	5725	6160	6740	7245
40	2925	3450	3975	4425	4950	5400	5925	6375	6975	7500
30	3095	365	4210	4685	5240	5715	6270	6745	7380	7935
10 LT	3610	4255	4905	5460	6105	6660	7310	7865	8605	9250
10 HT	3095	3655	4210	4685	5240	5715	6270	6745	7380	7935

Technology

High Speed

Steel Belted

Performance

Traction

Self-Cleaning

Reduced Soil Compaction

High Load Capacity

Handling & Comfort

STD: Standard - SPL: Special

AGRIMAX RT 765 (R-1W)

∅ 38"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	710/70 R 38	178 A8/B	DW 23 B	-	716	1959	859	5751	925	STD

Load capacity (kg/tire)										
km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
50	2915	3395	3870	4350	4825	5300	5925	6375	6975	7500
40	2915	3395	3870	4350	4825	5300	5925	6375	6975	7500
30	3125	3635	4145	4655	5165	5675	6340	6825	7465	8025
10 LT	3910	4550	5190	5830	6470	7105	7940	8545	9350	10050
10 HT	3125	3635	4145	4655	5165	5675	6340	6825	7465	8025

∅ 42"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	620/70 R 42	160 A8/B	DW 20 B	-	625	1935	876	5742	925	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	2475	2880	3285	3690	4095	4500
40	2475	2880	3285	3690	4095	4500
30	2650	3085	3515	3950	4385	4815
10 LT	3320	3860	4405	4945	5490	6030
10 HT	2650	3085	3515	3950	4385	4815

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	620/70 R 42	160 D	DW 20 B	-	625	1935	876	5742	925	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	2475	2880	3285	3690	4095	4500
50	2600	3025	3450	3875	4300	4725
40	2715	3160	3600	4045	4490	4930
30	2850	3315	3780	4245	4710	5175
10 LT	3320	3860	4405	4945	5490	6030
10 HT	2850	3315	3780	4245	4710	5175

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	620/70 R 42	166 A8/B	DW 20 B	-	625	1935	876	5742	925	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	2475	2880	3285	3690	4095	4500	4930	5300
40	2475	2880	3285	3690	4095	4500	4930	5300
30	2650	3085	3515	3950	4385	4815	5275	5670
10 LT	3320	3860	4405	4945	5490	6030	6605	7100
10 HT	2650	3085	3515	3950	4385	4815	5275	5670

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	620/70 R 42	166 D	DW 20 B	-	625	1935	876	5742	925	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
65	2495	2865	3290	3710	4135	4560	4985	5300
50	2620	3010	3455	3900	4345	4790	5235	5565
40	2730	3135	3600	4065	4530	4995	5460	5805
30	2865	3295	3780	4270	4755	5245	5730	6095
10 LT	3340	3840	4410	4975	5545	6115	6680	7105
10 HT	2865	3295	3780	4270	4755	5245	5730	6095

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	620/70 R 42	166 D	DW 20 B	-	625	1935	876	5742	925	SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.3
65	2495	2865	3290	3710	4135	4560	4985	5300
50	2620	3010	3455	3900	4345	4790	5235	5565
40	2730	3135	3600	4065	4530	4995	5460	5805
30	2865	3295	3780	4270	4755	5245	5730	6095
10 LT	3340	3840	4410	4975	5545	6115	6680	7105
10 HT	2865	3295	3780	4270	4755	5245	5730	6095

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	620/70 R 42	173 D	DW 20 B	-	625	1935	876	5742	925	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	1.8	2.0	2.2	2.4
65	2535	2990	3445	3835	4290	4680	5135	5525	6045	6500
50	2665	3140	3620	4030	4505	4915	5395	5805	6350	6825
40	2780	3280	3775	4205	4700	5130	5625	6055	6625	7120
30	2920	3440	3965	4415	4935	5385	5910	6355	6955	7475
10 LT	3400	4010	4620	5140	5750	6275	6885	7405	8105	8710
10 HT	2920	3440	3965	4415	4935	5385	5910	6355	6955	7475

STD: Standard - SPL: Special

Technology

High Speed

Steel Belted

Performance

Traction

Self-Cleaning

Reduced Soil Compaction

High Load Capacity

Handling & Comfort

AGRIMAX RT 765 (R-1W)

∅ 42"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	620/70 R 42	173 D	DW 20 B	-	625	1935	876	5742	925	SPL
	710/70 R 42	173 A8/B	DW 23 B	-	716	2061	922	6174	975	STD
	710/70 R 42	173 D/176 A8	DW 23 B	-	716	2061	922	6174	975	STD
	710/70 R 42	176 D/179 A8	DW 23 B	-	716	2061	922	6174	975	STD
	710/70 R 42	176 D/179 A8	DW 23 B	-	716	2061	922	6174	975	SPL
∅ 46"	**620/70 R 46**	162 A8/B	DW 20 B	-	625	2036	906	6047	975	STD
	620/70 R 46	162 D	DW 20 B	-	625	2036	906	6047	975	STD

Load capacity (kg/tire)

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
65	2535	2990	3445	3835	4290	4680	5135	5525	6045	6500
50	2665	3140	3620	4030	4505	4915	5395	5805	6350	6825
40	2780	3280	3775	4205	4700	5130	5625	6055	6625	7120
30	2920	3440	3965	4415	4935	5385	5910	6355	6955	7475
10 LT	3400	4010	4620	5140	5750	6275	6885	7405	8105	8710
10 HT	2920	3440	3965	4415	4935	5385	5910	6355	6955	7475

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	3055	3510	4030	4550	5070	5590	6045	6500
40	3055	3510	4030	4550	5070	5590	6045	6500
30	3270	3760	4315	4870	5425	5985	6470	6955
10 LT	4095	4705	5405	6100	6795	7495	8105	8710
10 HT	3270	3760	4315	4870	5425	5985	6470	6955

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
65	3120	3640	4095	4550	5005	5395	5980	6500
50	3280	3825	4300	4780	5260	5665	6280	6825
40	3410	3980	4475	4970	5470	5895	6535	7100
30	3590	4190	4710	5235	5760	6205	6880	7475
10 LT	4185	4880	5490	6100	6710	7230	8015	8710
10 HT	3590	4190	4710	5235	5760	6205	6880	7475

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8
65	2970	3450	3935	4420	4900	5385	5935	6280	6900
50	3120	3625	4130	4640	5145	5655	6235	6595	7245
40	3335	3875	4420	4960	5505	6045	6665	7055	7750
30	3415	3970	4525	5080	5635	6190	6825	7225	7935
10 LT	3980	4625	5275	5920	6570	7215	7955	8420	9250
10 HT	3415	3970	4525	5080	5635	6190	6825	7225	7935

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8
65	2970	3450	3835	4420	4900	5385	5935	6280	6900
50	3120	3625	4130	4640	5145	5655	6235	6595	7245
40	3335	3875	4420	4960	5505	6045	6665	7055	7750
30	3415	3970	4525	5080	5635	6190	6825	7225	7935
10 LT	3980	4625	5275	5920	6570	7215	7955	8420	9250
10 HT	3415	3970	4525	5080	5635	6190	6828	7225	7935

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	2615	3040	3470	3895	4325	4750
40	2615	3040	3470	3895	4325	4750
30	2800	3255	3715	4170	4630	5085
10 LT	3505	4075	4650	5220	5795	6365
10 HT	2800	3255	3715	4170	4630	5085

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	2615	3040	3470	3895	4325	4750
50	2745	3195	3645	4095	4545	4990
40	2865	3335	3800	4270	4740	5205
30	3010	3500	3990	4485	4975	5465
10 LT	3505	4075	4650	5220	5795	6365
10 HT	3010	3500	3990	4485	4975	5465

STD: Standard - SPL: Special

Technology

- High Speed
- Steel Belted

Performance

- Traction
- Self-Cleaning
- Reduced Soil Compaction
- High Load Capacity
- Handling & Comfort

Radial



AGRIMAX RT 855 (R-1W)

AGRIMAX RT 855 provides excellent traction and comfort properties. Mainly designed for soil tillage and both field and road transport, some sizes are also suitable for row crops, spraying, and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire)
∅ 16"	180/95 R 16	105 A8/B	5.5 F	6.0 F	185	760	340	2265	360	STD	

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6
50	430	550	670	735	790	865	925	-
40	430	550	670	735	790	865	925	-
30	460	585	715	785	845	925	990	-
10	505	655	795	950	1085	1130	1255	1390

	210/95 R 16	106 A8/B	W 7	W 6 ; 6 LB	214	806	360	2415	390	STD	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	450	515	590	665	745	820	885	950
40	450	515	590	665	745	820	885	950
30	480	555	635	715	800	880	950	1020
10 LT	600	690	795	895	995	1100	1190	1275
10 HT	480	555	635	715	800	880	950	1020

∅ 18"	210/95 R 18	108 A8/B	W 7	W 6	214	855	385	2565	410	STD	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	470	540	620	700	780	860	930	1000
40	470	540	620	700	780	860	930	1000
30	505	580	665	750	835	925	1000	1070
10 LT	630	725	835	940	1050	1155	1250	1340
10 HT	505	580	665	750	835	925	1000	1070

∅ 20"	210/90 R 20	110 A8/B	W 7	W 6	211	890	412	2681	425	STD	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	500	575	660	745	830	915	990	1060
40	500	575	660	745	830	915	990	1060
30	535	615	705	795	890	980	1060	1135
10 LT	670	770	885	1000	1115	1230	1330	1425
10 HT	535	615	705	795	890	980	1060	1135

	210/95 R 20	110 A8/B	W 7	W 6	214	908	418	2749	450	STD	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	500	575	660	745	830	915	990	1060
40	500	575	660	745	830	915	990	1060
30	535	615	705	795	890	980	1060	1135
10 LT	670	770	885	1000	1115	1230	1330	1425
10 HT	535	615	705	795	890	980	1060	1135

	250/85 R 20	116 A8/B	W 8	W 7 ; W 9	250	940	424	2812	450	STD	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	590	675	775	875	975	1075	1165	1250
40	590	675	775	875	975	1075	1165	1250
30	630	725	835	940	1050	1155	1250	1340
10 LT	790	905	1040	1175	1310	1445	1560	1675
10 HT	630	725	835	940	1050	1155	1250	1340

	280/85 R 20	112 A8/B	W 10	W 9	292	984	441	2952	475	STD	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	620	720	820	920	1020	1120
40	620	720	820	920	1020	1120
30	660	770	880	985	1095	1200
10 LT	830	965	1100	1235	1370	1505
10 HT	660	770	880	985	1095	1200

	320/85 R 20	119 A8/B	W 11	W 9 ; W 10	329	1052	467	3100	500	STD	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	750	875	995	1120	1240	1360
40	750	875	995	1120	1240	1360
30	805	935	1070	1200	1330	1460
10 LT	1005	1170	1335	1500	1665	1825
10 HT	805	935	1070	1200	1330	1460

STD: Standard

Performance

Traction

Self-Cleaning

High Load Capacity

Handling & Comfort

AGRIMAX RT 855 (R-1W)

∅ 22"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	250/85 R 22	113 A8/B	W 8	W 7	251	985	453	2964	475	STD
	250/85 R 22	113 A8/B	W 8	W 7	251	985	453	2964	475	SPL

Load capacity (kg/tire)

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	545	625	715	805	900	990	1070	1150
40	545	625	715	805	900	990	1070	1150
30	585	670	770	865	965	1065	1150	1235
10 LT	730	835	960	1085	1210	1330	1440	1545
10 HT	585	670	770	865	965	1065	1150	1235

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	545	625	715	805	900	990	1070	1150
40	545	625	715	805	900	990	1070	1150
30	585	670	770	865	965	1065	1150	1235
10 LT	730	835	960	1085	1210	1330	1440	1545
10 HT	585	670	770	865	965	1065	1150	1235

∅ 24"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	250/85 R 24	109 A8/B	W 8	W 7 ; W 9	251	1036	475	3104	500	STD
	250/85 R 24	109 A8/B	W 8	W 7 ; W 9	251	1036	475	3104	500	SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	570	660	755	845	940	1030
40	570	660	755	845	940	1030
30	610	710	810	910	1010	1105
10 LT	765	890	1015	1140	1265	1385
10 HT	610	710	810	910	1010	1105

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	570	660	755	845	940	1030
40	570	660	755	845	940	1030
30	610	710	810	910	1010	1105
10 LT	765	890	1015	1140	1265	1385
10 HT	610	710	810	910	1010	1105

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	280/85 R 24	115 A8/B	W 10	W 9	292	1086	492	3224	525	STD
	280/85 R 24	115 A8/B	W 10	W 9	292	1086	492	3224	525	SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	670	780	890	1000	1110	1215
40	670	780	890	1000	1110	1215
30	720	840	955	1075	1190	1305
10 LT	900	1045	1190	1340	1485	1630
10 HT	720	840	955	1075	1190	1305

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	670	780	890	1000	1110	1215
40	670	780	890	1000	1110	1215
30	720	840	955	1075	1190	1305
10 LT	900	1045	1190	1340	1485	1630
10 HT	720	840	955	1075	1190	1305

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	320/85 R 24	122 A8/B	W 11	W 9 ; W 10	329	1154	519	3424	550	STD
	320/85 R 24	122 A8/B	W 11	W 9 ; W 10	329	1154	519	3424	550	SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	825	960	1095	1230	1365	1500
40	825	960	1095	1230	1365	1500
30	885	1030	1175	1320	1465	1605
10 LT	1110	1290	1470	1650	1830	2010
10 HT	885	1030	1175	1320	1465	1605

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	825	960	1095	1230	1365	1500
40	825	960	1095	1230	1365	1500
30	885	1030	1175	1320	1465	1605
10 LT	1110	1290	1470	1650	1830	2010
10 HT	885	1030	1175	1320	1465	1605

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	340/85 R 24	125 A8/B	W 12	W 11	353	1188	531	3540	575	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	910	1060	1205	1355	1505	1650
40	910	1060	1205	1355	1505	1650
30	975	1135	1295	1455	1615	1770
10 LT	1220	1420	1620	1820	2020	2215
10 HT	975	1135	1295	1455	1615	1770

STD: Standard - SPL: Special

Performance

Traction

Self-Cleaning

High Load Capacity

Handling & Comfort

AGRIMAX RT 855 (R-1W)

∅ 24"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire) km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
	340/85 R 24	125 A8/B	W 12	W 11	353	1188	531	3540	575	SPL	**50**	910	1060	1205	1355	1505	1650
											40	910	1060	1205	1355	1505	1650
											30	975	1135	1295	1455	1615	1770
											10 LT	1220	1420	1620	1820	2020	2215
											10 HT	975	1135	1295	1455	1615	1770
	380/85 R 24	131 A8/B	W 12	W 11 ; W 13	380	1256	554	3720	600	STD	**km/h - bar**	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
											50	1075	1250	1425	1600	1775	1950
											40	1075	1250	1425	1600	1775	1950
											30	1150	1340	1530	1715	1905	2090
											10 LT	1440	1675	1910	2145	2380	2615
											10 HT	1150	1340	1530	1715	1905	2090
	380/85 R 24	131 A8/B	W 12	W 11 ; W 13	380	1256	554	3720	600	SPL	**km/h - bar**	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
											50	1075	1250	1425	1600	1775	1950
											40	1075	1250	1425	1600	1775	1950
											30	1150	1340	1530	1715	1905	2090
											10 LT	1440	1675	1910	2145	2380	2615
											10 HT	1150	1340	1530	1715	1905	2090
	420/85 R 24	137 A8/B	W 15 L	W 14 L ; W 13	438	1324	582	3900	625	STD	**km/h - bar**	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
											50	1265	1475	1680	1890	2095	2300
											40	1265	1475	1680	1890	2095	2300
											30	1360	1580	1800	2025	2245	2465
											10 LT	1700	1975	2255	2530	2810	3085
											10 HT	1360	1580	1800	2025	2245	2465
	420/85 R 24	137 A8/B	W 15 L	W 14 L ; W 13	438	1324	582	3900	625	SPL	**km/h - bar**	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
											50	1265	1475	1680	1890	2095	2300
											40	1265	1475	1680	1890	2095	2300
											30	1360	1580	1800	2025	2245	2465
											10 LT	1700	1975	2255	2530	2810	3085
											10 HT	1360	1580	1800	2025	2245	2465
∅ 28"	**250/85 R 28**	112 A8/B	W 8	W 7 ; W 9	251	1137	519	3421	550	STD	**km/h - bar**	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
											50	620	720	820	920	1020	1120
											40	620	720	820	920	1020	1120
											30	660	770	880	985	1095	1200
											10 LT	830	965	1100	1235	1370	1505
											10 HT	660	770	880	985	1095	1200
	250/85 R 28	112 A8/B	W 8	W 7 ; W 9	251	1137	519	3421	550	SPL	**km/h - bar**	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
											50	620	720	820	920	1020	1120
											40	620	720	820	920	1020	1120
											30	660	770	880	985	1095	1200
											10 LT	830	965	1100	1235	1370	1505
											10 HT	660	770	880	985	1095	1200
	280/85 R 28	118 A8/B	W 10	W 9	292	1187	545	3558	575	STD	**km/h - bar**	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
											50	730	845	965	1085	1205	1320
											40	730	845	965	1085	1205	1320
											30	780	910	1035	1165	1290	1415
											10 LT	975	1135	1295	1455	1615	1770
											10 HT	780	910	1035	1165	1290	1415
	280/85 R 28	118 A8/B	W 10	W 9	292	1187	545	3558	575	SPL	**km/h - bar**	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
											50	730	845	965	1085	1205	1320
											40	730	845	965	1085	1205	1320
											30	780	910	1035	1165	1290	1415
											10 LT	975	1135	1295	1455	1615	1770
											10 HT	780	910	1035	1165	1290	1415

STD: Standard - SPL: Special

Performance

Traction

Self-Cleaning

High Load Capacity

Handling & Comfort

AGRIMAX RT 855 (R-1W)

∅ 28"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire)
	320/85 R 28	124 A8/B	W 11	W 9 ; W 10	329	1255	569	3743	600	STD	
	320/85 R 28	124 A8/B	W 11	W 9 ; W 10	329	1255	569	3743	600	SPL	
	340/85 R 28	127 A8/B	W 12	W 11	353	1289	588	3890	625	STD	
	340/85 R 28	127 A8/B	W 12	W 11	353	1289	588	3890	625	SPL	
	380/85 R 28	133 A8/B	W 12	W 11 ; W 13	380	1357	606	4015	650	STD	
	380/85 R 28	133 A8/B	W 12	W 11 ; W 13	380	1357	606	4015	650	SPL	
	420/85 R 28	139 A8/B	W 15 L	W 13 ; W 14 L	438	1425	638	4241	675	STD	
	420/85 R 28	139 A8/B	W 15 L	W 13 ; W 14 L	438	1425	638	4241	675	SPL	
∅ 30"	**380/85 R 30**	135 A8/B	W 12	W 11 ; W 13	380	1408	633	4190	675	STD	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	880	1025	1170	1315	1460	1600
40	880	1025	1170	1315	1460	1600
30	945	1100	1255	1410	1565	1715
10 LT	1180	1375	1570	1760	1955	2145
10 HT	945	1100	1255	1410	1565	1715

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	880	1025	1170	1315	1460	1600
40	880	1025	1170	1315	1460	1600
30	945	1100	1255	1410	1565	1715
10 LT	1180	1375	1570	1760	1955	2145
10 HT	945	1100	1255	1410	1565	1715

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	965	1120	1280	1435	1595	1750
40	965	1120	1280	1435	1595	1750
30	1035	1200	1370	1540	1710	1875
10 LT	1290	1505	1715	1925	2135	2345
10 HT	1035	1200	1370	1540	1710	1875

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	965	1120	1280	1435	1595	1750
40	965	1120	1280	1435	1595	1750
30	1035	1200	1370	1540	1710	1875
10 LT	1290	1505	1715	1925	2135	2345
10 HT	1035	1200	1370	1540	1710	1875

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1135	1320	1505	1690	1875	2060
40	1135	1320	1505	1690	1875	2060
30	1215	1415	1610	1810	2010	2205
10 LT	1525	1770	2020	2270	2520	2765
10 HT	1215	1415	1610	1810	2010	2205

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1135	1320	1505	1690	1875	2060
40	1135	1320	1505	1690	1875	2060
30	1215	1415	1610	1810	2010	2205
10 LT	1525	1770	2020	2270	2520	2765
10 HT	1215	1415	1610	1810	2010	2205

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1340	1560	1775	1995	2215	2430
40	1340	1560	1775	1995	2215	2430
30	1435	1670	1905	2140	2375	2605
10 LT	1795	2090	2380	2675	2970	3260
10 HT	1435	1670	1905	2140	2375	2605

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1340	1560	1775	1995	2215	2430
40	1340	1560	1775	1995	2215	2430
30	1435	1670	1905	2140	2375	2605
10 LT	1795	2090	2380	2675	2970	3260
10 HT	1435	1670	1905	2140	2375	2605

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1200	1400	1595	1790	1985	2180
40	1200	1400	1595	1790	1985	2180
30	1285	1495	1705	1915	2125	2335
10 LT	1610	1875	2140	2400	2665	2925
10 HT	1285	1495	1705	1915	2125	2335

STD: Standard - SPL: Special

Performance

Traction

Self-Cleaning

High Load Capacity

Handling & Comfort

AGRIMAX RT 855 (R-1W)

∅	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire) km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
30"	**380/85 R 30**	135 A8/B	W 12	W 11 ; W 13	380	1408	633	4190	675	SPL	50	1200	1400	1595	1790	1985	2180
											40	1200	1400	1595	1790	1985	2180
											30	1285	1495	1705	1915	2125	2335
											10 LT	1610	1875	2140	2400	2665	2925
											10 HT	1285	1495	1705	1915	2125	2335
	420/85 R 30	140 A8/B	W 15 L	W 13 ; W 14 L	438	1475	661	4421	700	STD	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
											50	1375	1600	1825	2050	2275	2500
											40	1375	1600	1825	2050	2275	2500
											30	1475	1715	1955	2195	2435	2675
											10 LT	1845	2145	2450	2750	3050	3350
											10 HT	1475	1715	1955	2195	2435	2675
	420/85 R 30	140 A8/B	W 15 L	W 13 ; W 14 L	438	1475	661	4421	700	SPL	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
											50	1375	1600	1825	2050	2275	2500
											40	1375	1600	1825	2050	2275	2500
											30	1475	1715	1955	2195	2435	2675
											10 LT	1845	2145	2450	2750	3050	3350
											10 HT	1475	1715	1955	2195	2435	2675
	460/85 R 30	145 A8/B	W 16 L	W 14 L ; W 15 L	475	1544	680	4629	725	STD	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
											50	1595	1860	2120	2380	2640	2900
											40	1595	1860	2120	2380	2640	2900
											30	1710	1990	2270	2550	2830	3105
											10 LT	2140	2490	2840	3190	3540	3890
											10 HT	1710	1990	2270	2550	2830	3105
	460/85 R 30	156 A8/B	W 16 L	W 14 L ; W 15 L	475	1544	680	4629	725	STD	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
											50	1560	1840	2120	2360	2460	2880	3160	3400	3720	4000
											40	1560	1840	2120	2360	2460	2880	3160	3400	3720	4000
											30	1670	1970	2270	2530	2825	3085	3385	3640	3985	4280
											10 LT	2095	2470	2845	3165	3540	3860	4235	4560	4985	5360
											10 HT	1790	2110	2430	2705	3025	3300	3620	3895	4260	4580
32"	**320/85 R 32**	126 A8/B	W 11	W 9 ; W 10	329	1357	621	4081	650	STD	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
											50	935	1090	1245	1395	1550	1700
											40	935	1090	1245	1395	1550	1700
											30	1005	1165	1330	1495	1660	1820
											10 LT	1255	1460	1665	1870	2075	2280
											10 HT	1005	1165	1330	1495	1660	1820
	320/85 R 32	126 A8/B	W 11	W 9 ; W 10	329	1357	621	4081	650	SPL	km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
											50	935	1090	1245	1395	1550	1700
											40	935	1090	1245	1395	1550	1700
											30	1005	1165	1330	1495	1660	1820
											10 LT	1255	1460	1665	1870	2075	2280
											10 HT	1005	1165	1330	1495	1660	1820
34"	**320/85 R 34**	141 A8/B	W 11	W 9 ; W 10	329	1408	645	4280	675	STD	km/h - bar	0.6	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6
											50	930	1085	1420	1730	1880	2010	2190	2370	2575
											40	930	1085	1420	1730	1880	2010	2190	2370	2575
											30	995	1160	1520	1850	2015	2155	2350	2540	2760
											10 LT	1245	1455	1905	2315	2525	2695	2940	3180	3455
											10 HT	995	1160	1520	1850	2015	2155	2350	2540	2760

STD: Standard - SPL: Special

Performance

- Traction
- Self-Cleaning
- High Load Capacity
- Handling & Comfort

AGRIMAX RT 855 (R-1W)

∅ 34" Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire)

320/85 R 34 | 141 A8/B | W 11 | W 9 ; W 10 | 329 | 1408 | 645 | 4280 | 675 | SPL

km/h - bar	0.6	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6
50	930	1085	1420	1730	1880	2010	2190	2370	2575
40	930	1085	1420	1730	1880	2010	2190	2370	2575
30	995	1160	1520	1850	2015	2155	2350	2540	2760
10 LT	1245	1455	1905	2315	2525	2695	2940	3180	3455
10 HT	995	1160	1520	1850	2015	2155	2350	2540	2760

380/85 R 34 | 137 A8/B | W 12 | W 11 ; W 13 | 380 | 1509 | 682 | 4504 | 725 | STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1265	1475	1680	1890	2095	2300
40	1265	1475	1680	1890	2095	2300
30	1360	1580	1800	2025	2245	2465
10 LT	1700	1975	2255	2530	2810	3085
10 HT	1360	1580	1800	2025	2245	2465

380/85 R 34 | 137 A8/B | W 12 | W 11 ; W 13 | 380 | 1509 | 682 | 4504 | 725 | SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1265	1475	1680	1890	2095	2300
40	1265	1475	1680	1890	2095	2300
30	1360	1580	1800	2025	2245	2465
10 LT	1700	1975	2255	2530	2810	3085
10 HT	1360	1580	1800	2025	2245	2465

420/85 R 34 | 142 A8/B | W 15 L | W 13 ; W 14 L | 438 | 1578 | 709 | 4702 | 750 | STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1460	1700	1935	2175	2415	2650
40	1460	1700	1935	2175	2415	2650
30	1565	1820	2075	2330	2585	2840
10 LT	1960	2280	2600	2920	3240	3555
10 HT	1565	1820	2075	2330	2585	2840

420/85 R 34 | 142 A8/B | W 15 L | W 13 ; W 14 L | 438 | 1578 | 709 | 4702 | 750 | SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1460	1700	1935	2175	2415	2650
40	1460	1700	1935	2175	2415	2650
30	1565	1820	2075	2330	2585	2840
10 LT	1960	2280	2600	2920	3240	3555
10 HT	1565	1820	2075	2330	2585	2840

420/85 R 34 | 147 A8/B | W 15 L | W 13 ; W 14 L | 438 | 1578 | 709 | 4702 | 750 | STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	1450	1665	1910	2155	2400	2645	2895	3075
40	1450	1665	1910	2155	2400	2645	2895	3075
30	1550	1780	2045	2310	2575	2835	3100	3295
10 LT	1940	2230	2560	2890	3220	3550	3880	4125
10 HT	1550	1780	2045	2310	2575	2835	3100	3595

460/85 R 34 | 147 A8/B | W 16 L | W 14 L ; W 15 L | 475 | 1646 | 721 | 4865 | 775 | STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1695	1970	2245	2525	2800	3075
40	1695	1970	2245	2525	2800	3075
30	1815	2110	2410	2705	3000	3295
10 LT	2270	2640	3015	3385	3755	4125
10 HT	1815	2110	2410	2705	3000	3295

460/85 R 34 | 147 A8/B | W 16 L | W 14 L ; W 15 L | 475 | 1646 | 721 | 4865 | 775 | SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1695	1970	2245	2525	2800	3075
40	1695	1970	2245	2525	2800	3075
30	1815	2110	2410	2705	3000	3295
10 LT	2270	2640	3015	3385	3755	4125
10 HT	1815	2110	2410	2705	3000	3295

460/85 R 34 | 158 A8/B | W 16 L | W 14 L ; W 15 L | 475 | 1646 | 721 | 4865 | 775 | STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
50	1660	1955	2255	2510	2805	3060	3360	3615	3955	4250
40	1660	1955	2255	2510	2805	3060	3360	3615	3955	4250
30	1755	2095	2415	2685	3005	3280	3595	3870	4235	4550
10 LT	2225	2620	3020	3365	3760	4105	4500	4845	5300	5695
10 HT	1900	2245	2585	2875	3215	3510	3850	4140	4530	4870

STD: Standard - SPL: Special

Performance

Traction

Self-Cleaning

High Load Capacity

Handling & Comfort

AGRIMAX RT 855 (R-1W)

∅ 36"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	320/85 R 36	128 A8/B	W 11	W 9 ; W 10	329	1458	672	4404	700	STD
	320/85 R 36	128 A8/B	W 11	W 9 ; W 10	329	1458	672	4404	700	SPL
	320/85 R 36	147 D/150 A8	W 11	W 9 ; W 10	329	1458	672	4404	700	STD
	340/85 R 36	132 A8/B	W 12	W 11	353	1492	689	4507	725	STD
	340/85 R 36	132 A8/B	W 12	W 11	353	1492	689	4507	725	SPL
∅ 38"	320/85 R 38	143 A8/B	W 10	W 9 ; W 11 ; DW 11	319	1509	700	4580	725	STD
	320/85 R 38	143 A8/B	W 10	W 9 ; W 11 ; DW 11	319	1509	700	4580	725	SPL
	340/85 R 38	133 A8/B	W 12	W 11	353	1543	712	4668	750	STD
	340/85 R 38	133 A8/B	W 12	W 11	353	1543	712	4668	750	SPL

Load capacity (kg/tire)

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	990	1155	1315	1480	1640	1800
40	990	1155	1315	1480	1640	1800
30	1065	1240	1410	1585	1760	1930
10 LT	1330	1550	1765	1985	2200	2415
10 HT	1065	1240	1410	1585	1760	1930

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	990	1155	1315	1480	1640	1800
40	990	1155	1315	1480	1640	1800
30	1065	1240	1410	1585	1760	1930
10 LT	1330	1550	1765	1985	2200	2415
10 HT	1065	1240	1410	1585	1760	1930

km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4
65	1160	1330	1500	1810	2010	2120	2320	2515	2685	2825	3075
50	1220	1400	1575	1905	2110	2230	2440	2645	2825	2970	3230
40	1270	1455	1645	1985	2200	2325	2540	2755	2945	3095	3350
30	1335	1530	1725	2080	2310	2440	2665	2895	3090	3250	3540
10 LT	1555	1785	2010	2430	2695	2845	3110	3375	3605	3790	4125
10 HT	1335	1530	1725	2080	2310	2440	2665	2895	3090	3250	3540

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1100	1280	1460	1640	1820	2000
40	1100	1280	1460	1640	1820	2000
30	1180	1370	1565	1755	1950	2140
10 LT	1475	1720	1960	2200	2440	2680
10 HT	1180	1370	1565	1755	1950	2140

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1100	1280	1460	1640	1820	2000
40	1100	1280	1460	1640	1820	2000
30	1180	1370	1565	1755	1950	2140
10 LT	1475	1720	1960	2200	2440	2680
10 HT	1180	1370	1565	1755	1950	2140

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	1.8	2.0	2.2	2.4	2.6
50	985	1145	1500	1830	1990	2130	2320	2510	2725	2915	3150
40	985	1145	1500	1830	1990	2130	2320	2510	2725	2915	3150
30	1055	1230	1610	1960	2135	2280	2485	2690	2920	3120	3375
10 LT	1320	1540	2015	2450	2670	2855	3110	3365	3655	3905	4220
10 HT	1055	1230	1610	1960	2135	2280	2485	2690	2920	3120	3375

km/h - bar	0.6	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6
50	985	1145	1500	1830	1990	2130	2320	2510	2725
40	985	1145	1500	1830	1990	2130	2320	2510	2725
30	1055	1230	1610	1960	2135	2280	2485	2690	2920
10 LT	1320	1540	2015	2450	2670	2855	3110	3365	3655
10 HT	1055	1230	1610	1960	2135	2280	2485	2690	2920

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1135	1320	1505	1690	1875	2060
40	1135	1320	1505	1690	1875	2060
30	1215	1415	1610	1810	2010	2205
10 LT	1525	1770	2020	2270	2520	2765
10 HT	1215	1415	1610	1810	2010	2205

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1135	1320	1505	1690	1875	2060
40	1135	1320	1505	1690	1875	2060
30	1215	1415	1610	1810	2010	2205
10 LT	1525	1770	2020	2270	2520	2765
10 HT	1215	1415	1610	1810	2010	2205

Performance

- Traction
- Self-Cleaning
- High Load Capacity
- Handling & Comfort

STD: Standard - SPL: Special

AGRIMAX RT 855 (R-1W)

∅ 38"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire)
	380/85 R 38	139 A8/B	W 12	W 11 ; W 13	380	1611	736	4842	775	STD	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1340	1560	1775	1995	2215	2430
40	1340	1560	1775	1995	2215	2430
30	1435	1670	1905	2140	2375	2605
10 LT	1795	2090	2380	2675	2970	3260
10 HT	1435	1670	1905	2140	2375	2605

380/85 R 38	139 A8/B	W 12	W 11 ; W 13	380	1611	736	4842	775	SPL	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1340	1560	1775	1995	2215	2430
40	1340	1560	1775	1995	2215	2430
30	1435	1670	1905	2140	2375	2605
10 LT	1795	2090	2380	2675	2970	3260
10 HT	1435	1670	1905	2140	2375	2605

420/85 R 38	144 A8/B	W 15 L	W 13 ; W 14 L	438	1679	763	5014	800	STD	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1540	1795	2045	2300	2550	2800
40	1540	1795	2045	2300	2550	2800
30	1650	1920	2190	2460	2730	3000
10 LT	2070	2405	2745	3080	3420	3755
10 HT	1650	1920	2190	2460	2730	3000

420/85 R 38	144 A8/B	W 15 L	W 13 ; W 14 L	438	1679	763	5014	800	SPL	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1540	1795	2045	2300	2550	2800
40	1540	1795	2045	2300	2550	2800
30	1650	1920	2190	2460	2730	3000
10 LT	2070	2405	2745	3080	3420	3755
10 HT	1650	1920	2190	2460	2730	3000

460/85 R 38	149 A8/B	W 16 L	W 14 L ; W 15 L	475	1747	785	5205	825	STD	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1790	2080	2375	2665	2960	3250
40	1790	2080	2375	2665	2960	3250
30	1915	2230	2545	2855	3170	3480
10 LT	2400	2790	3180	3575	3965	4355
10 HT	1915	2230	2545	2855	3170	3480

460/85 R 38	149 A8/B	W 16 L	W 14 L ; W 15 L	475	1747	785	5205	825	SPL	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1790	2080	2375	2665	2960	3250
40	1790	2080	2375	2665	2960	3250
30	1915	2230	2545	2855	3170	3480
10 LT	2400	2790	3180	3575	3965	4355
10 HT	1915	2230	2545	2855	3170	3480

480/80 R 38	149 A8/B	W 16 L	W 14 L ; W 15 L	475	1747	785	5161	825	STD	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1790	2080	2375	2665	2960	3250
40	1790	2080	2375	2665	2960	3250
30	1915	2230	2545	2855	3170	3480
10 LT	2400	2790	3180	3575	3965	4355
10 HT	1915	2230	2545	2855	3170	3480

520/70 R 38	170 A8/B	DW 16 L	DW 18 L ; DD 16 L	516	1849	813	5393	875	SPL	

km/h - bar	0.6	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6
50	2170	2560	3255	3875	4440	4740	5220	5640	6000
40	2170	2560	3255	3875	4440	4740	5220	5640	6000
30	2325	2740	3490	4150	4755	5075	5590	6035	6420
10 LT	2910	3430	4365	5195	5950	6355	6995	7560	8040
10 HT	2325	2740	3490	4150	4755	5075	5590	6035	6420

520/85 R 38	155 A8/B	DW 16 L	DW 18 L ; DD 16 L	516	1849	813	5466	875	STD	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	2170	2560	2910	3255	3565	3875
40	2170	2560	2910	3255	3565	3875
30	2325	2740	3115	3490	3820	4150
10 LT	2910	3430	3900	4365	4780	5195
10 HT	2325	2740	3115	3490	3820	4150

STD: Standard - SPL: Special

Performance

- Traction
- Self-Cleaning
- High Load Capacity
- Handling & Comfort

AGRIMAX RT 855 (R-1W)

∅	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
∅ 38"	520/85 R 38	155 A8/B	DW 16 L	DW 18 L ; DD 16 L	516	1849	813	5466	875	SPL
	520/85 R 38	170 A8/B	DW 16 L	DW 18 L ; DD 16 L	516	1849	813	5466	875	STD
∅ 42"	480/80 R 42	151 A8/B	W 16 A ; DD 16 ; DW 16 A	DD 16 L ; DW 16 L ; W 16 L	479	1835	835	5495	875	STD
	520/85 R 42	157 A8/B	DW 16 A ; W 16 A ; DD 16	DW 18 A ; DD 18 ; W 18 A ; DD 18 L	516	1951	858	5782	925	STD
	520/85 R 42	157 A8/B	DW 16 A ; W 16 A ; DD 16	DW 18 A ; DD 18 ; W 18 A ; DD 18 L	516	1951	858	5782	925	SPL
	520/85 R 42	167 A8/B	DW 16 A ; W 16 A ; DD 16	DW 18 A ; DD 18 ; W 18 A ; DD 18 L	516	1951	858	5782	925	STD
	520/85 R 42	167 A8/B	DW 16 A ; W 16 A ; DD 16	DW 18 A ; DD 18 ; W 18 A ; DD 18 L	516	1951	858	5782	925	SPL
∅ 46"	420/80 R 46	151 D/162 A2	W 13	W 12	418	1840	863	5641	875	STD

Load capacity (kg/tire)

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	2170	2560	2910	3255	3565	3875
40	2170	2560	2910	3255	3565	3875
30	2325	2740	3115	3490	3820	4150
10 LT	2910	3430	3900	4365	4780	5195
10 HT	2325	2740	3115	3490	3820	4150

km/h - bar	0.6	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6
50	2170	2560	3255	3875	4440	4740	5220	5640	6000
40	2170	2560	3255	3875	4440	4740	5220	5640	6000
30	2325	2740	3490	4150	4755	5075	5590	6035	6420
10 LT	2910	3430	4365	5195	5950	6355	6995	7560	8040
10 HT	2325	2740	3490	4150	4755	5075	5590	6035	6420

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1900	2210	2520	2830	3140	3450
40	1900	2210	2520	2830	3140	3450
30	2035	2365	2700	3030	3365	3695
10 LT	2545	2960	3380	3795	4210	4625
10 HT	2035	2365	2700	3030	3365	3695

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	2270	2640	3015	3385	3755	4125
40	2270	2640	3015	3385	3755	4125
30	2430	2830	3225	3625	4020	4415
10 LT	3045	3540	4040	4535	5035	5530
10 HT	2430	2830	3225	3625	4020	4415

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.4	2.8	3.2
50	2270	2640	3015	3385	3755	4125	4635	5070	5450
40	2270	2640	3015	3385	3755	4125	4635	5070	5450
30	2430	2830	3225	3625	4020	4415	4960	5425	5830
10 LT	3045	3540	4040	4535	5035	5530	6210	6795	7305
10 HT	2430	2830	3225	3625	4020	4415	4960	5425	5830

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.4	2.8	3.2
50	2270	2640	3015	3385	3755	4125	4635	5070	5450
40	2270	2640	3015	3385	3755	4125	4635	5070	5450
30	2430	2830	3225	3625	4020	4415	4960	5425	5830
10 LT	3045	3540	4040	4535	5035	5530	6210	6795	7305
10 HT	2430	2830	3225	3625	4020	4415	4960	5425	5830

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
65	1625	1865	2140	2415	2695	2970	3210	3450
50	1705	1960	2250	2540	2830	3120	3375	3625
40	1780	2045	2345	2650	2950	3255	3520	3780
30	1870	2145	2465	2780	3100	3415	3695	3970
10	2235	2565	2945	3325	3705	4085	4420	4750
10 LT	2175	2500	2870	3240	3610	3980	4305	4625
10 HT	1870	2145	2465	2780	3100	3415	3695	3970

STD: Standard - SPL: Special

Performance

- Traction
- Self-Cleaning
- High Load Capacity
- Handling & Comfort

AGRIMAX RT 855 (R-1W)

∅ 46"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	420/80 R 46	159 D/170 A2	W 13	W 12	418	1840	863	5641	875	STD

Load capacity (kg/tire)

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
65	1625	1865	2140	2415	2695	2970	3210	3450	4070	4375
50	1705	1960	2250	2540	2830	3120	3375	3625	4275	4595
40	1780	2045	2345	2650	2950	3255	3520	3780	4460	4795
30	1870	2145	2465	2780	3100	3415	3695	3970	4685	5035
10	2235	2565	2945	3325	3705	4085	4420	4750	5580	6000
10 LT	2175	2500	2870	3240	3610	3980	4305	4625	5455	5865
10 HT	1870	2145	2465	2780	3100	3415	3695	3970	4685	5035

	420/80 R 46	159 D/170 A2	W 13	W 12	418	1840	863	5641	875	SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
65	1625	1865	2140	2415	2695	2970	3210	3450	4070	4375
50	1705	1960	2250	2540	2830	3120	3375	3625	4275	4595
40	1780	2045	2345	2650	2950	3255	3520	3780	4460	4795
30	1870	2145	2465	2780	3100	3415	3695	3970	4685	5035
10	2235	2565	2945	3325	3705	4085	4420	4750	5580	6000
10 LT	2175	2500	2870	3240	3610	3980	4305	4625	5455	5865
10 HT	1870	2145	2465	2780	3100	3415	3695	3970	4685	5035

	480/80 R 46	158 A8/B	DW 16 A ; W 16 A ; DD 16	W 16 L ; DD 16 L ; DW 16 L	479	1936	895	5871	925	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	2000	2295	2635	2975	3315	3655	3955	4250
40	2000	2295	2635	2975	3315	3655	3955	4250
30	2140	2460	2825	3185	3550	3915	4235	4550
10 LT	2680	3080	3535	3990	4445	4900	5300	5695
10 HT	2140	2460	2825	3185	3550	3915	4235	4550

	480/80 R 46	164 A8/B	DW 16 A ; W 16 A ; DD 16	W 16 L ; DD 16 L ; DW 16 L	479	1936	895	5871	925	STD

km/h - bar	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
50	2295	2635	2975	3315	3655	3955	4250	4650	5000
40	2295	2635	2975	3315	3655	3955	4250	4650	5000
30	2460	2825	3185	3550	3915	4235	4550	4975	5350
10 LT	3080	3535	3990	4445	4900	5300	5695	6230	6700
10 HT	2460	2825	3185	3550	3915	4235	4550	4975	5350

	520/85 R 46	158 A8/B	DW 16 L ; W 16 A ; W 16 L ; DD 16	DW 18 L ; W 18 L ; W 18 A	516	2052	949	6252	975	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	2340	2720	3105	3485	3870	4250
40	2340	2720	3105	3485	3870	4250
30	2505	2915	3325	3735	4145	4550
10 LT	3135	3645	4160	4670	5185	5695
10 HT	2505	2915	3325	3735	4145	4550

	520/85 R 46	158 A8/B	DW 16 L ; W 16 A ; W 16 L ; DD 16	DW 18 L ; W 18 L ; W 18 A	516	2052	949	6252	975	SPL

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	2340	2720	3105	3485	3870	4250
40	2340	2720	3105	3485	3870	4250
30	2505	2915	3325	3735	4145	4550
10 LT	3135	3645	4160	4670	5185	5695
10 HT	2505	2915	3325	3735	4145	4550

	520/85 R 46	173 A8/B	DW 16 L ; W 16 A ; W 16 L ; DD 16	DW 18 L ; W 18 L ; W 18 A	516	2052	949	6252	975	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.4	2.8	3.2	3.6	4.0
50	2340	2720	3105	3485	3870	4250	4875	5330	5785	6175	6500
40	2340	2720	3105	3485	3870	4250	4875	5330	5785	6175	6500
30	2505	2915	3325	3735	4145	4550	5215	5705	6190	6605	6955
10 LT	3135	3645	4160	4670	5185	5695	6535	7140	7750	8275	8710
10 HT	2505	2915	3325	3735	4145	4550	5215	5705	6190	6605	6955

STD: Standard - SPL: Special

Performance

- Traction
- Self-Cleaning
- High Load Capacity
- Handling & Comfort

TRACTOR

AGRIMAX RT 855 (R-1W)

∅ 50”	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	480/80 R 50	159 A8/B	DW 16 A	DW 15 A ; W 15 A	489	2036	941	6183	975	STD
	480/80 R 50	176 A8	DW 16 A	DW 15 A ; W 15 A	489	2036	945	6183	975	SB
	520/85 R 50	165 A8/B	DW 16L	DW 18 L	516	2154	992	6472	1025	STD

Load capacity (kg/tire)

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	2060	2365	2715	3065	3415	3765	4070	4375
40	2060	2365	2715	3065	3415	3765	4070	4375
30	2205	2530	2905	3280	3655	4030	4360	4685
10 LT	2760	3170	3640	4110	4575	5045	5455	5865
10 HT	2205	2530	2905	3280	3655	4030	4360	4685

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	5.0
50	2060	2365	2715	3065	3415	3765	4070	4375	4760	5185	5470	5825	6320	7100
40	2060	2365	2715	3065	3415	3765	4070	4375	4760	5185	5470	5825	6320	7100
30	2205	2530	2905	3280	3655	4030	4360	4685	5095	5550	5855	6235	6765	7600
10 LT	2760	3170	3640	4110	4575	5045	5455	5865	6380	6950	7330	7805	8470	9515
10 HT	2205	2530	2905	3280	3655	4030	4360	4685	5095	5550	5855	6235	6765	7600

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
50	2425	2785	3195	3605	4020	4430	4845	5150
40	2425	2785	3195	3605	4020	4430	4845	5150
30	2595	2980	3420	3865	4305	4745	5185	5515
10 LT	3250	3730	4285	4835	5390	5940	6495	6905
10 HT	2595	2980	3420	3865	4305	4745	5185	5515

STD: Standard - SB: Steel Belted

Performance

- Traction
- Self-Cleaning
- High Load Capacity
- Handling & Comfort



TRACTOR

Radial



AGRIMAX SPARGO (R-1)

AGRIMAX SPARGO is the special BKT tire for row crop applications. It has been designed for enhanced productivity in the fields and for preserving the soil in the long term. Thanks to VF technology, the tire provides higher load capacity at standard pressure. Thanks to a strong casing and an increased number of lugs, AGRIMAX SPARGO ensures outstanding durability along with strong stability both in the fields and during road transfers.

AGRIMAX SPARGO
RADIAL 'VF' SPRAYER TIRES

∅	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire)										
											km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
38"	VF 380/85 R 38	161 D	W 13	W 12	380	1602	730	4830	775	STD	From 10 to 65 km/h	1805	2130	2455	2730	3055	3330	3610	3935	4305	4625
											km/h - bar	2.2	2.4	2.6	2.9	3.2	3.6	4.0	4.3	4.4	
46"	VF 380/90 R 46	173 D	DW 13 A	W 13 A ; DW 12	390	1852	846	5611	925	STD	From 10 to 65 km/h	4355	4615	4810	5135	5460	5785	5980	6370	6500	
											km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.6
	VF 480/80 R 46	177 D	DW 16 L	DW 15 L	479	1936	889	5861	925	STD	From 10 to 65 km/h	2705	3140	3580	4090	4530	4965	5475	5770	6355	6865	7300
											km/h - bar	2.2	2.4	2.6	2.8	3.0	3.2	3.6	4.0	4.2	4.4
50"	VF 380/90 R 50	175 D	W 13 B	W 12 B	390	1950	893	5950	-	STD	From 10 to 65 km/h	4625	4750	5000	5150	5450	5600	6000	6300	6700	6900
											km/h - bar	2.2	2.4	2.6	2.9	3.2	3.6	4.0	4.3	4.4	
	VF 380/105 R 50	179 D	DW 13	TW 13 ; W 13	400	2050	934	6211	1025	STD	From 10 to 65 km/h	5195	5505	5735	6125	6510	6900	7130	7595	7750	
											km/h - bar	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6
	VF 420/95 R 50	177 D	DW 14	DW 13 ; W 13 ; W 14	419	2068	943	6210	1025	STD	From 10 to 65 km/h	5150	5365	5585	5800	6075	6350	6625	6900	7100	7300
											km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.6
	VF 480/80 R 50	179 D	DW 16 L	DW 15 L	479	2038	947	6224	975	STD	From 10 to 65 km/h	2870	3335	3800	4340	4805	5270	5815	6125	6745	7285	7750

STD: Standard

Technology

VF Technology

Strong Casing

More Lugs

Performance

High Load Capacity

Durability

Stability



Radial



AGRIMAX RT 945 (R-1W)

AGRIMAX RT 945 is specially designed for row crops: it does not damage the crops and preserves the yield. Excellent self-cleaning features allow for a quick change from field operations to road usage, where AGRIMAX RT 945 shows brilliant performance. It is suitable for compact utility tractors in municipality and maintenance applications.

∅	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire) km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6
30"	420/90 R 30	147 A8/B	DW13	-	418	1518	684	4571	725	STD	50	1665	2155	2645	2895	3075			
											40	1665	2155	2645	2895	3075			
											30	1780	2310	2835	3100	3295			
											10	2495	3235	3970	4340	4615			
42"	320/90 R 42	139 A8/B	W 10	W 9 ; W 11	319	1643	760	4944	800	STD	50	1315	1705	2090	2260	2430	-		
											40	1315	1705	2090	2260	2430	-		
											30	1410	1825	2245	2425	2605	-		
											10	1935	2370	2880	3355	3540	3645		
	320/90 R 42	139 A8/B	W 10	W 9 ; W 11	319	1643	760	4944	800	SPL	50	1315	1705	2090	2260	2430	-		
											40	1315	1705	2090	2260	2430	-		
											30	1410	1825	2245	2425	2605	-		
											10	1935	2370	2880	3355	3540	3645		
46"	320/90 R 46	146 A8/B	W 10	W 9 ; W 11	319	1744	810	5232	825	STD	50	1380	1770	2160	2370	2550	2790	3000	-
											40	1380	1770	2160	2370	2550	2790	3000	-
											30	1480	1895	2315	2540	2730	2990	3210	-
											10	1620	2115	2565	3060	3510	3645	4050	4500
	320/90 R 46	146 A8/B	W 10	W 9 ; W 11	319	1744	810	5232	825	SPL	50	1380	1770	2160	2370	2550	2790	3000	-
											40	1380	1770	2160	2370	2550	2790	3000	-
											30	1480	1895	2315	2540	2730	2990	3210	-
											10	1620	2115	2565	3060	3510	3645	4050	4500
	320/90 R 46	148 D/151 A8	W 10	W 9 ; W 11	319	1744	810	5232	825	STD	65	1355	1765	2145	2365	2490	2745	2965	3150
											50	1425	1855	2255	2485	2615	2880	3115	3310
											40	1485	1935	2350	2590	2730	3005	3245	3450
											30	1560	2030	2465	2715	2860	3150	3405	3620
											10	2035	2650	3215	3545	3735	4115	4445	4725
	320/90 R 46	148 D/151 A8	W 10	W 9 ; W 11	319	1744	810	5232	825	SPL	65	1355	1765	2145	2365	2490	2745	2965	3150
											50	1425	1855	2255	2485	2615	2880	3115	3310
											40	1485	1935	2350	2590	2730	3005	3245	3450
											30	1560	2030	2465	2715	2860	3150	3405	3620
											10	2035	2650	3215	3545	3735	4115	4445	4725
	380/90 R 46	155 A8/B	W 12	W 11 ; W 13	380	1852	859	5699	875	STD	50	1785	2290	2790	3065	3295	3605	3875	-
											40	1785	2290	2790	3065	3295	3605	3875	-
											30	1910	2450	2990	3280	3530	3860	4150	-
											10	2095	2735	3315	3955	4540	4715	5235	5815

STD: Standard - SPL: Special

Technology

Strong Casing

Performance

High Load Capacity

Durability

Stability

Self-Cleaning

Traction

AGRIMAX RT 945 (R-1W)

∅ 46"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	380/90 R 46	159 A8/B	W 12	W 11 ; W 13	380	1852	859	5699	875	STD
	380/90 R 46	159 A8/B	W 12	W 11 ; W 13	380	1852	859	5699	875	SPL
∅ 50"	320/90 R 50	150 A8/B	W 10	W 9 ; W 11	319	1846	873	5618	875	STD
	320/90 R 50	150 A8/B	W 10	W 9 ; W 11	319	1846	873	5618	875	SPL
	380/90 R 50	151 A8/B	W 12	W 11 ; W 13	380	1954	913	5902	975	STD
	380/90 R 50	151 A8/B	W 12	W 11 ; W 13	380	1954	913	5902	975	SPL
	380/90 R 50	160 A8/B	W 12	W 11 ; W 13	380	1954	913	5902	975	SPL
∅ 54"	320/90 R 54	156 A8/B	W 10	W 9 ; W 11	319	1948	930	6021	925	STD
	320/90 R 54	156 A8/B	W 10	W 9 ; W 11	319	1948	930	6021	925	SPL
	380/90 R 54	158 A8/B	W 12	W 11 ; W 13	380	2056	962	6296	1025	STD

Load capacity (kg/tire)

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4
50	1785	2290	2790	3065	3295	3605	3875	4070	4375	-
40	1785	2290	2790	3065	3295	3605	3875	4070	4375	-
30	1910	2450	2990	3280	3530	3860	4150	4360	4685	-
10	2095	2735	3315	3955	4540	4715	5235	5815	6040	6565

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4
50	1785	2290	2790	3065	3295	3605	3875	4070	4375	-
40	1785	2290	2790	3065	3295	3605	3875	4070	4375	-
30	1910	2450	2990	3280	3530	3860	4150	4360	4685	-
10	2095	2735	3315	3955	4540	4715	5235	5815	6040	6565

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
50	1410	1845	2245	2450	2615	2850	3085	3350	-
40	1410	1845	2245	2450	2615	2850	3085	3350	-
30	1510	1975	2405	2620	2800	3050	3300	3585	-
10	1960	2565	3120	3420	3620	3970	4325	4675	5025

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
50	1410	1845	2245	2450	2615	2850	3085	3350	-
40	1410	1845	2245	2450	2615	2850	3085	3350	-
30	1510	1975	2405	2620	2800	3050	3300	3585	-
10	1960	2565	3120	3420	3620	3970	4325	4675	5025

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8
50	1865	2415	2970	3210	3450	-
40	1865	2415	2970	3210	3450	-
30	2000	2590	3180	3440	3695	-
10	2745	3365	4090	4765	5020	5175

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8
50	1865	2415	2970	3210	3450	-
40	1865	2415	2970	3210	3450	-
30	2000	2590	3180	3440	3695	-
10	2745	3365	4090	4765	5020	5175

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4
50	1845	2385	2880	3195	3375	3690	4005	4275	4500	-
40	1845	2385	2880	3195	3375	3690	4005	4275	4500	-
30	1975	2555	3085	3420	3615	3950	4290	4575	4815	-
10	2670	3450	4165	4620	4880	5335	5790	6180	6505	6750

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	4.8
50	1500	1935	2340	2595	2740	2995	3250	3470	3650	4000	-
40	1500	1935	2340	2595	2740	2955	3250	3470	3650	4000	-
30	1605	2075	2505	2780	2935	3210	3480	3715	3910	4280	-
10	-	1860	2340	2880	3420	3960	4080	4560	5040	5520	6000

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	4.8
50	1500	1935	2340	2595	2740	2995	3250	3470	3650	4000	-
40	1500	1935	2340	2595	2740	2955	3250	3470	3650	4000	-
30	1605	2075	2505	2780	2935	3210	3480	3715	3910	4280	-
10	-	1860	2340	2880	3420	3960	4080	4560	5040	5520	6000

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6
50	1955	2510	3060	3315	3615	3955	4250	-
40	1955	2510	3060	3315	3615	3955	4250	-
30	2095	2685	3280	3550	3870	4235	4550	-
10	2295	3000	3635	4335	4975	5165	5740	6375

STD: Standard - SPL: Special

Technology

Strong Casing

Performance

High Load Capacity

Durability

Stability

Self-Cleaning

Traction

TRACTOR

AGRIMAX RT 945 (R-1W)

∅ 54"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version		Load capacity (kg/tire)								
												km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6
	380/90 R 54	158 A8/B	W 12	W 11 ; W 13	380	2056	962	6296	1025	SPL		50	1955	2510	3060	3315	3615	3955	4250	-
												40	1955	2510	3060	3315	3615	3955	4250	-
												30	2095	2685	3280	3550	3870	4235	4550	-
												10	2295	3000	3635	4335	4975	5165	5740	6375

SPL: Special

Technology

Strong Casing

Performance

High Load Capacity

Durability

Stability

Self-Cleaning

Traction



Radial



AGRIMAX RT 955 (R-1)

AGRIMAX RT 955 is a BKT radial tire for row crop applications, while some sizes are also suitable for spraying and vineyards. The special tread design with a rounded shoulder provides excellent traction performance, stability and self-cleaning properties. Thanks to its strong casing, AGRIMAX RT 955 has a high load capacity.

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire)
∅ 24"	210/90 R 24	107 A8/B	W 7	W 6	214	1010	462	3027	475	STD	km/h - bar: 0.6 / 0.8 / 1.0 / 1.2 / 1.4 / 1.6 / 2.0 / 2.4 / 2.8
											50: 460 / 530 / 605 / 685 / 765 / 840 / 910 / 975 / -
											40: 460 / 530 / 605 / 685 / 765 / 840 / 910 / 975 / -
											30: 495 / 565 / 650 / 735 / 820 / 900 / 975 / 1045 / -
											10: 675 / 780 / 865 / 955 / 1055 / 1160 / 1350 / 1425 / 1465
∅ 28"	210/95 R 28	116 A8/B	W 7	W 6	214	1111	513	3333	550	STD	km/h - bar: 0.6 / 0.8 / 1.0 / 1.2 / 1.4 / 1.6 / 2.0 / 2.4 / 2.8
											50: 590 / 675 / 775 / 875 / 975 / 1075 / 1165 / 1250 / -
											40: 590 / 675 / 775 / 875 / 975 / 1075 / 1165 / 1250 / -
											30: 630 / 725 / 835 / 940 / 1050 / 1155 / 1250 / 1340 / -
											10: 865 / 995 / 1110 / 1220 / 1350 / 1485 / 1725 / 1820 / 1875
∅ 32"	210/95 R 32	120 A8/B	W 7	W 6	214	1213	571	3703	575	STD	km/h - bar: 0.8 / 1.2 / 1.6 / 2.0 / 2.4 / 2.8 / 3.2 / 3.6
											50: 645 / 830 / 1010 / 1095 / 1190 / 1305 / 1400 / -
											40: 645 / 830 / 1010 / 1095 / 1190 / 1305 / 1400 / -
											30: 690 / 885 / 1080 / 1170 / 1275 / 1395 / 1500 / -
											10: 905 / 1180 / 1430 / 1555 / 1660 / 1830 / 1975 / 2100
	230/95 R 32	128 A8/B	W 8	W 7	238	1251	585	3792	600	STD	km/h - bar: 0.8 / 1.2 / 1.6 / 2.0 / 2.4 / 2.8 / 3.2 / 3.6 / 4.0 / 4.4
											50: 705 / 920 / 1120 / 1225 / 1300 / 1425 / 1550 / 1675 / 1800 / -
											40: 705 / 920 / 1120 / 1225 / 1300 / 1425 / 1550 / 1675 / 1800 / -
											30: 755 / 985 / 1200 / 1315 / 1390 / 1525 / 1660 / 1795 / 1930 / -
											10: 840 / 1055 / 1300 / 1540 / 1785 / 1840 / 2055 / 2270 / 2485 / 2700
	270/95 R 32	136 A8/B	W 9	W 8 ; W 10	275	1327	614	4076	625	STD	km/h - bar: 0.8 / 1.2 / 1.6 / 2.0 / 2.4 / 2.8 / 3.2 / 3.6 / 4.0 / 4.4
											50: 875 / 1145 / 1390 / 1525 / 1615 / 1770 / 1930 / 2085 / 2240 / -
											40: 875 / 1145 / 1390 / 1525 / 1615 / 1770 / 1930 / 2085 / 2240 / -
											30: 940 / 1225 / 1490 / 1635 / 1730 / 1900 / 2065 / 2235 / 2400 / -
											10: 1045 / 1315 / 1615 / 1920 / 2220 / 2285 / 2555 / 2825 / 3095 / 3360
∅ 36"	230/95 R 36	130 A8/B	W 8	W 7	238	1352	639	4112	650	STD	km/h - bar: 0.8 / 1.2 / 1.6 / 2.0 / 2.4 / 2.8 / 3.2 / 3.6 / 4.0 / 4.4
											50: 745 / 970 / 1180 / 1295 / 1370 / 1505 / 1635 / 1770 / 1900 / -
											40: 745 / 970 / 1180 / 1295 / 1370 / 1505 / 1635 / 1770 / 1900 / -
											30: 795 / 1040 / 1265 / 1385 / 1470 / 1610 / 1755 / 1895 / 2035 / -
											10: 885 / 1115 / 1370 / 1625 / 1885 / 1940 / 2170 / 2395 / 2625 / 2850
	270/95 R 36	139 A8/B	W 9	W 8 ; W 10	275	1428	665	4368	675	STD	km/h - bar: 0.8 / 1.2 / 1.6 / 2.0 / 2.4 / 2.8 / 3.2 / 3.6 / 4.0 / 4.4
											50: 950 / 1240 / 1510 / 1655 / 1750 / 1920 / 2090 / 2260 / 2430 / -
											40: 950 / 1240 / 1510 / 1655 / 1750 / 1920 / 2090 / 2260 / 2430 / -
											30: 1020 / 1330 / 1620 / 1775 / 1880 / 2060 / 2245 / 2425 / 2605 / -
											10: 1130 / 1425 / 1750 / 2080 / 2410 / 2480 / 2775 / 3065 / 3355 / 3645
∅ 38"	270/95 R 38	140 A8/B	W 9	W 8 ; W 10	275	1479	697	4510	700	STD	km/h - bar: 0.8 / 1.2 / 1.6 / 2.0 / 2.4 / 2.8 / 3.2 / 3.6 / 4.0 / 4.4
											50: 975 / 1275 / 1550 / 1700 / 1800 / 1975 / 2150 / 2325 / 2500 / -
											40: 975 / 1275 / 1550 / 1700 / 1800 / 1975 / 2150 / 2325 / 2500 / -
											30: 1045 / 1365 / 1660 / 1820 / 1930 / 2115 / 2305 / 2490 / 2675 / -
											10: 1165 / 1465 / 1800 / 2140 / 2475 / 2550 / 2850 / 3150 / 3450 / 3750

STD: Standard

Technology

Strong Casing

Performance

High Load Capacity

Durability

Stability

Self-Cleaning

Traction

AGRIMAX RT 955 (R-1)

∅ 40"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	230/95 R 40	132 A8/B	W 7	W 8	228	1454	690	4445	700	STD

Load capacity (kg/tire)

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4
50	820	1060	1280	1420	1500	1640	1780	1900	2000	-
40	820	1060	1280	1420	1500	1640	1780	1900	2000	-
30	880	1135	1370	1520	1605	1755	1905	2035	2140	-
10	930	1170	1440	1710	1980	2040	2280	2520	2760	3000

∅ 42"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	230/95 R 42	133 A8/B	W 8	W 7	238	1506	714	4633	725	STD

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4
50	805	1055	1280	1405	1485	1630	1775	1920	2060	-
40	805	1055	1280	1405	1485	1630	1775	1920	2060	-
30	860	1125	1370	1500	1590	1745	1900	2055	2205	-
10	960	1210	1485	1765	2040	2105	2350	2600	2845	3090

300/85 R 42	144 A8/B	W 9	W 10 ; W 11	295	1577	745	4850	750	STD	

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4
50	1150	1485	1795	1960	2100	2300	2495	2660	2800	-
40	1150	1485	1795	1960	2100	2300	2495	2660	2800	-
30	1230	1590	1920	2100	2250	2460	2670	2850	3000	-
10	1305	1640	2020	2395	2775	2860	3195	3530	3865	4200

∅ 44"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	210/95 R 44	120 A8/B	W 7	W 6	214	1518	721	4653	725	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8
50	660	760	870	980	1095	1205	1305	1400	-
40	660	760	870	980	1095	1205	1305	1400	-
30	705	810	930	1050	1170	1290	1395	1500	-
10	970	1115	1240	1365	1515	1660	1935	2040	2100

230/95 R 44	134 A8/B	W 8	W 7	238	1556	739	4788	750	STD	

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4
50	830	1085	1315	1445	1530	1675	1825	1975	2120	-
40	830	1085	1315	1445	1530	1675	1825	1975	2120	-
30	890	1160	1410	1545	1635	1795	1955	2115	2270	-
10	990	1245	1530	1815	2100	2165	2420	2675	2930	3180

270/95 R 44	142 A8/B	W 9	W 8 ; W 10	275	1632	764	4983	775	STD	

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4
50	1035	1355	1645	1805	1910	2095	2280	2465	2650	-
40	1035	1355	1645	1805	1910	2095	2280	2465	2650	-
30	1110	1450	1765	1935	2045	2245	2445	2645	2840	-
10	1235	1555	1910	2270	2625	2705	3025	3340	3660	3975

∅ 46"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	270/95 R 46	143 A8/B	W 9	W 8 ; W 10	275	1683	792	5169	825	STD

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4
50	1120	1445	1745	1910	2045	2235	2430	2590	2725	-
40	1120	1445	1745	1910	2045	2235	2430	2590	2725	-
30	1200	1550	1870	2045	2190	2395	2600	2775	2920	-
10	1545	2000	2410	2640	2825	3090	3355	3580	3765	4090

300/95 R 46	148 A8/B	W 9	W 10 ; W 11 ; DW 10 ; DW 11	295	1738	812	5318	825	STD	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4
50	1105	1295	1485	1670	1860	2020	2205	2365	2585	2805	2995	3150	-
40	1105	1295	1485	1670	1860	2020	2205	2365	2585	2805	2995	3150	-
30	1185	1385	1590	1790	1995	2160	2365	2535	2770	3005	3210	3375	-
20	1360	1590	1825	2055	2290	2480	2715	2910	3180	3450	3685	3875	-
10	1525	1785	2045	2310	2570	2785	3045	3265	3570	3875	4135	4350	4725

340/85 R 46	150 A8/B	W 12	W 11	353	1746	811	5238	825	STD	

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
50	1445	1880	2280	2480	2650	2915	3150	3350	-
40	1445	1880	2280	2480	2650	2915	3150	3350	-
30	1545	2010	2440	2655	2835	3120	3370	3585	-
10	2065	2665	3220	3520	3770	4125	4475	4775	5025

STD: Standard

Technology

Strong Casing

Performance

High Load Capacity

Durability

Stability

Self-Cleaning

Traction

TRACTOR

AGRIMAX RT 955 (R-1)

∅ 48"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire)										
											km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4
	230/95 R 48	136 A8/B	W 8	W 7	238	1656	792	5085	800	STD	50	875	1145	1390	1525	1615	1770	1930	2085	2240	-
											40	875	1145	1390	1525	1615	1770	1930	2085	2240	-
											30	940	1225	1490	1635	1730	1900	2065	2235	2400	-
											10	1045	1315	1615	1920	2220	2285	2555	2825	3095	3360
	270/95 R 48	144 A8/B	W 9	W 8 ; W 10	275	1733	820	5351	825	STD	km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4
											50	1095	1430	1740	1905	2020	2215	2410	2605	2800	-
											40	1095	1430	1740	1905	2020	2215	2410	2605	2800	-
											30	1170	1530	1860	2040	2160	2370	2580	2790	3000	-
											10	1305	1640	2020	2395	2775	2860	3195	3530	3865	4200
	340/85 R 48	152 A8/B	W 12	W 11	353	1797	855	5572	875	STD	km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4
											50	1385	1815	2205	2415	2560	2805	3055	3305	3550	-
											40	1385	1815	2205	2415	2560	2805	3055	3305	3550	-
											30	1485	1940	2360	2585	2740	3005	3270	3535	3800	-
											10	1655	2080	2560	3040	3515	3625	4050	4475	4900	5325
∅ 52"	300/95 R 52	151 A8/B	W 9	W 10 ; W 11 ; DW 10 ; DW 11	295	1891	889	5822	925	STD	km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4
											50	1350	1760	2140	2350	2485	2730	2970	3210	3450	-
											40	1350	1760	2140	2350	2485	2730	2970	3210	3450	-
											30	1445	1885	2295	2515	2665	2920	3180	3440	3695	-
											10	1605	2020	2485	2950	3420	3520	3935	4350	4765	5175
∅ 54"	270/95 R 54	146 A8/B	W 9	W 8 ; W 10	275	1885	894	5815	925	STD	km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4
											50	1170	1530	1860	2040	2160	2370	2580	2790	3000	-
											40	1170	1530	1860	2040	2160	2370	2580	2790	3000	-
											30	1255	1640	1995	2185	2315	2540	2765	2990	3210	-
											10	1395	1755	2160	2565	2970	3060	3420	3780	4140	4500

STD: Standard

Technology

Strong Casing

Performance

High Load Capacity

Durability

Stability

Self-Cleaning

Traction



Radial



AGRIMAX ELOS

AGRIMAX ELOS has been designed to enhance top traction performance even under particularly awkward operating conditions on wet terrains such as paddy fields or marshland. The tread design has been especially developed to ensure optimum self-cleaning properties, which are essential for operations on muddy land and during transfers. To optimize the farmers' productivity reducing machine downtime, sidewall protectors have been integrated into the design of the AGRIMAX ELOS tire to ensure maximum protection against possible damages at any time.

AGRIMAX ELOS
RADIAL MARSHLAND TIRES

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire)
∅ 28"	**420/85 R 28**	139 A8/B	W 15 L	W 13 ; W 14 L	438	1467	665	4349	700	STD	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1340	1560	1775	1995	2215	2430
40	1340	1560	1775	1995	2215	2430
30	1435	1670	1905	2140	2375	2605
10 LT	1795	2090	2380	2675	2970	3260
10 HT	1435	1670	1905	2140	2375	2605

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
∅ 38"	**340/85 R 38**	133 A8/B	W 12	W 11	353	1602	735	4774	775	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1135	1320	1505	1690	1875	2060
40	1135	1320	1505	1690	1875	2060
30	1215	1415	1610	1810	2010	2205
10 LT	1525	1770	2020	2270	2520	2765
10 HT	1215	1415	1610	1810	2010	2205

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	380/85 R 38	139 A8/B	W 12	W 11 ; W 13	380	1662	772	4994	775	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1340	1560	1775	1995	2215	2430
40	1340	1560	1775	1995	2215	2430
30	1435	1670	1905	2140	2375	2605
10 LT	1795	2090	2380	2675	2970	3260
10 HT	1435	1670	1905	2140	2375	2605

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	420/85 R 38	144 A8/B	W 15 L	W 13; W 14 L	438	1735	785	5135	825	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1540	1795	2045	2300	2550	2800
40	1540	1795	2045	2300	2550	2800
30	1650	1920	2190	2460	2730	3000
10 LT	2070	2405	2745	3080	3420	3755
10 HT	1650	1920	2190	2460	2730	3000

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	480/80 R 38	149 A8/B	W 16 L	W 15 L ; DW 16 L	489	1803	821	5356	875	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1790	2080	2375	2665	2960	3250
40	1790	2080	2375	2665	2960	3250
30	1915	2230	2545	2855	3170	3480
10 LT	2400	2790	3180	3575	3965	4355
10 HT	1915	2230	2545	2855	3170	3480

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	710/70 R 38	178 A8/B	DW 23 B	DW 25 B	716	2019	915	6103	975	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.6
50	2775	3225	3675	4200	4650	5100	5625	5925	6525	7050	7500
40	2775	3225	3675	4200	4650	5100	5625	5925	6525	7050	7500
30	2970	3455	3935	4495	4980	5460	6020	6340	6985	7545	8025
10 LT	3720	4325	4925	5630	6235	6835	7540	7940	8745	9450	10050
10 HT	2970	3455	3935	4495	4980	5460	6020	6340	6985	7545	8025

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
∅ 42"	**480/80 R 42**	151 A8/B	DW 16 L	DD 16 L ; W 16 L	489	1890	857	5629	875	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1900	2210	2520	2830	3140	3450
40	1900	2210	2520	2830	3140	3450
30	2035	2365	2700	3030	3365	3695
10 LT	2545	2960	3380	3795	4210	4625
10 HT	2035	2365	2700	3030	3365	3695

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	520/85 R 42	157 A8/B	DW 16 L	DD 18 L ; DW 18 L	516	1988	904	5865	925	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	2270	2640	3015	3385	3755	4125
40	2270	2640	3015	3385	3755	4125
30	2430	2830	3225	3625	4020	4415
10 LT	3045	3540	4040	4535	5035	5530
10 HT	2430	2830	3225	3625	4020	4415

STD: Standard

Technology

Extra Deep Tread

Performance

For Muddy Ground

Traction

Self-Cleaning

Radial



RT 851 (R-1)

RT 851 is a R-1 tire specially engineered for tractors in grassland applications. The special rounded lug design has been developed to reduce any damage to grassland and emerging crops as well as soil compaction. The strong nylon casing with rugged polyester belts provides extraordinary traction as well as increased load capacity.

∅ 20"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version		Load capacity (kg/tire) km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
	14.9L R 20	119 A8/B	W 13	W 11; W 12; W 14	378	1100	498	3286	525	STD		50	750	875	995	1120	1240	1360
												40	750	875	995	1120	1240	1360
												30	805	935	1070	1200	1330	1460
												10 LT	1005	1170	1335	1500	1665	1825
												10 HT	805	935	1070	1200	1330	1460

STD: Standard

Performance

Reduced Soil Compaction

Traction

High Load Capacity

TRACTOR

Radial



RT 853 (R-1)

RT 853 is a R-1 tire for tractors and vineyard harvesters in soil tillage and vineyard harvesting applications. It features great traction, load capacity and self-cleaning properties.

∅ 38"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version		Load capacity (kg/tire) km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
	480/80 R 38	149 A8/B	W 16 L	W 15 L ; W 14 L	475	1747	781	5256	825	STD		50	1790	2080	2375	2665	2960	3250
												40	1790	2080	2375	2665	2960	3250
												30	1915	2230	2545	2855	3170	3480
												10 LT	2400	2790	3180	3575	3965	4355
												10 HT	1915	2230	2545	2855	3170	3480
	520/85 R 38	155 A8/B	DW 16 L	DW 18 L ; DD 16 L	516	1849	830	5592	875	STD		km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
												50	2135	2480	2830	3180	3530	3875
												40	2135	2480	2830	3180	3530	3875
												30	2285	2660	3030	3405	3780	4150
												10 LT	2860	3325	3795	4260	4730	5195
												10 HT	2285	2660	3030	3405	3780	4150

STD: Standard

Performance


Traction

High Load Capacity

Self-Cleaning

TRACTOR

Radial



RT 857 (R-1)

RT 857 is a tire designed for soil tillage applications. Its strong casing offers excellent durability and traction. The stubble-resistant tread compound features high cut-and-chip resistance.

∅	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire) km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
∅ 24"	**320/85 R 24**	122 A8/B	W 11	W 10 ; W 9	329	1154	528	3449	550	STD	**50**	825	960	1095	1230	1365	1500
											40	825	960	1095	1230	1365	1500
											30	885	1030	1175	1320	1465	1605
											10 LT	1110	1290	1470	1650	1830	2010
											10 HT	885	1030	1175	1320	1465	1605
	380/85 R 24	131 A8/B	W 12	W 13 ; W 11	380	1256	566	3783	600	STD	**km/h - bar**	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
											50	1075	1250	1425	1600	1775	1950
											40	1075	1250	1425	1600	1775	1950
											30	1150	1340	1530	1715	1905	2090
											10 LT	1440	1675	1910	2145	2380	2615
											10 HT	1150	1340	1530	1715	1905	2090
∅ 26"	**420/85 R 26**	138 A8/B	DW 15 L	W 14 L ; W 15 L ; W 16 L ; DW 16 L	438	1374	616	4115	650	STD	**km/h - bar**	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
											50	1300	1515	1725	1940	2150	2360
											40	1300	1515	1725	1940	2150	2360
											30	1395	1620	1850	2075	2305	2530
											10 LT	1745	2030	2315	2600	2885	3165
											10 HT	1395	1620	1850	2075	2305	2530
	460/85 R 26	143 A8/B	DW 15 L	W 15 L ; W 16 L ; DW 16 L	465	1442	642	4297	675	STD	**km/h - bar**	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
											50	1500	1745	1990	2235	2480	2725
											40	1500	1745	1990	2235	2480	2725
											30	1610	1870	2135	2395	2660	2920
											10LT	2015	2340	2670	3000	3330	3655
											10HT	1610	1870	2135	2395	2660	2920
∅ 28"	**320/85 R 28**	124 A8/B	W 11	W 9 ; W 10	329	1255	577	3779	600	STD	**km/h - bar**	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
											50	880	1025	1170	1315	1460	1600
											40	880	1025	1170	1315	1460	1600
											30	945	1100	1255	1410	1565	1715
											10 LT	1180	1375	1570	1760	1955	2145
											10 HT	945	1100	1255	1410	1565	1715
	340/85 R 28	127 A8/B	W 12	W 11	353	1289	599	3908	625	STD	**km/h - bar**	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
											50	965	1120	1280	1435	1595	1750
											40	965	1120	1280	1435	1595	1750
											30	1035	1200	1370	1540	1710	1875
											10 LT	1290	1505	1715	1925	2135	2345
											10 HT	1035	1200	1370	1540	1710	1875
	380/85 R 28	133 A8/B	W 12	W 11 ; W 13	390	1357	617	4127	650	STD	**km/h - bar**	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
											50	1135	1320	1505	1690	1875	2060
											40	1135	1320	1505	1690	1875	2060
											30	1215	1415	1610	1810	2010	2205
											10 LT	1525	1770	2020	2270	2520	2765
											10 HT	1215	1415	1610	1810	2010	2205

Technology



Strong Casing



Special Compound

Performance



Cut and Chip Resistance



Durability



Traction



High Load Capacity

STD: Standard

TRACTOR

RT 857 (R-1)

∅ 28”	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	
	420/85 R 28	139 A8/B	W 15 L	W 14 L ; W 13	450	1425	640	4276	675	STD	

Load capacity (kg/tire)						
km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1340	1560	1775	1995	2215	2430
40	1340	1560	1775	1995	2215	2430
30	1435	1670	1905	2140	2375	2605
10 LT	1795	2090	2380	2675	2970	3260
10 HT	1435	1670	1905	2140	2375	2605

∅ 30”	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	
	420/85 R 30	140 A8/B	W 15 L	W 14 L ; W 13	438	1476	656	4398	700	STD	
	460/85 R 30	145 A8/B	W 16 L	W 15 L ; W 14 L	475	1544	682	4601	725	STD	

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1375	1600	1825	2050	2275	2500
40	1375	1600	1825	2050	2275	2500
30	1475	1715	1955	2195	2435	2675
10LT	1845	2145	2450	2750	3050	3350
10HT	1475	1715	1955	2195	2435	2675

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
50	1595	1860	2120	2380	2640	2900
40	1595	1860	2120	2380	2640	2900
30	1710	1990	2270	2550	2830	3105
10LT	2140	2490	2840	3190	3540	3890
10HT	1710	1990	2270	2550	2830	3105

STD: Standard

Technology

- Strong Casing
- Special Compound

Performance

- Cut and Chip Resistance
- Durability
- Traction
- High Load Capacity



Radial



RIDEMAX IT 696

RIDEMAX IT 696 has a unique tread design and a wide footprint that provides excellent grip for road applications, even in winter conditions. The tire is best suitable for transport and municipality/maintenance applications thanks to its high-speed feature and strong casing. The tread design has been specifically developed for heavy-duty services and ensures a low rolling resistance that provides fuel economy plus great stability.

RIDEMAX
RADIAL TRANSPORT TIRES

∅	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire) km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2	3.5	4.0
∅ 18"	340/80 R 18	143 A8/138 D	11 ; 11 SDC ; W 11	W 10 ; 12 ; 12 SDC	343	1001	458	2980	475	STD	65	920	1135	1345	1535	1745	1960	2100	2360
											50	995	1225	1455	1660	1885	2115	2270	2550
											40	1065	1310	1555	1770	2015	2260	2425	2725
											30	1275	1570	1865	2125	2420	2715	2910	3270
∅ 24"	300/80 R 24	133 A8/128 D	DW 10	-	295	1090	501	3296	525	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2		
											65	845	1045	1225	1420	1600	1800		
											50	910	1125	1320	1535	1725	1940		
											40	970	1195	1400	1625	1835	2060		
											30	1010	1245	1460	1700	1915	2150		
	340/80 R 24	140 A8/135 D	DW 11	W 10 ; W 12 ; DW 10	343	1154	521	3444	550	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2		
											65	1025	1265	1480	1720	1940	2180		
											50	1105	1365	1600	1855	2090	2350		
											40	1175	1450	1700	1975	2225	2500		
											30	1220	1510	1770	2055	2315	2600		
	360/80 R 24	143 A8/138 D	DW 11	W 12 ; W 10	343	1186	537	3556	575	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2		
											65	1110	1370	1605	1865	2100	2360		
											50	1200	1480	1735	2015	2270	2550		
											40	1280	1580	1855	2155	2425	2725		
											30	1535	1895	2225	2585	2910	3270		
	400/80 R 24	149 A8/144 D	DW 13	W 12 ; W 14 L	404	1250	558	3760	600	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2		
											65	1315	1625	1905	2210	2490	2800		
											50	1440	1775	2080	2415	2725	3060		
											40	1530	1885	2210	2570	2895	3250		
											30	1590	1960	2300	2670	3010	3380		
	420/65 R 24	146 D/151 A8	DW 13 L	DW 151 L ; DW 14 L	418	1158	530	3483	550	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2		
											65	1410	1740	2040	2370	2670	3000		
											50	1525	1880	2205	2560	2885	3240		
											40	1620	2000	2345	2725	3070	3450		
											30	1945	2400	2815	3270	3685	4140		
	440/80 R 24	154 A8/149 D	DW 14 L	DW 15 L ; DW 13	441	1314	590	3939	625	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2		
											65	1530	1885	2210	2570	2895	3250		
											50	1650	2035	2385	2775	3125	3510		
											40	1765	2175	2550	2965	3340	3750		
											30	2115	2610	3060	3555	4005	4500		
	460/65 R 24	151 D/156 A8	DW 14 L	DW 15 L ; DW 13	455	1214	549	3644	575	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2		
											65	1620	2000	2345	2725	3070	3450		
											50	1755	2165	2535	2945	3320	3730		
											40	1880	2320	2720	3160	3560	4000		
											30	2255	2785	3265	3790	4270	4800		
∅ 28"	400/80 R 28	151 A8/146 D	W 13	W 12 ; W 14 L	404	1352	615	4048	650	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2		
											65	1410	1740	2040	2370	2670	3000		
											50	1530	1890	2215	2575	2900	3260		
											40	1620	2000	2345	2725	3070	3450		
											30	1690	2090	2450	2845	3205	3600		

STD: Standard

Technology

- High Speed
- Strong Casing
- Larger Footprint
- Block Pattern

Performance

- Road Oriented
- Durability
- Stability
- Fuel Economy
- Heavy Duty

RIDEMAX IT 696

∅	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire) km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2
∅ 28"	440/80 R 28	156 A8/151 D	W 14 L	W 15 L	441	1415	634	4248	675	STD	65	1620	2000	2345	2725	3070	3450
											50	1765	2180	2555	2970	3345	3760
											40	1880	2320	2720	3160	3560	4000
											30	1955	2415	2830	3285	3700	4160
∅ 30"	440/80 R 30	157 A8/153 D	W 14 L	W 15 L	441	1466	668	4456	700	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2
											65	1715	2115	2480	2885	3250	3650
											50	1825	2250	2640	3065	3455	3880
											40	1940	2395	2805	3260	3670	4125
											30	2020	2495	2925	3395	3825	4300
	480/80 R 30	162 A8/157 D	W 15 L	W 16 L	479	1530	673	4558	725	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2
											65	1940	2395	2805	3260	3670	4125
											50	2105	2600	3045	3540	3985	4480
											40	2235	2755	3230	3755	4230	4750
											30	2320	2865	3360	3905	4395	4940
∅ 34"	440/80 R 34	159 A8/155 D	W 14 L	W 15 L	441	1567	704	4714	750	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2
											65	1820	2250	2635	3060	3450	3875
											50	1935	2390	2800	3255	3665	4120
											40	2055	2540	2975	3455	3895	4375
											30	2145	2645	3100	3600	4060	4560
	480/80 R 34	164 A8/159 D	W 15 L	W 16 L	479	1632	728	4894	775	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2
											65	2055	2540	2975	3455	3895	4375
											50	2210	2725	3195	3715	4185	4700
											40	2350	2900	3400	3950	4450	5000
											30	2445	3015	3535	4110	4630	5200
∅ 38"	480/80 R 38	166 A8/161 D	W 15 L	W 16 L	479	1733	780	5213	825	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2
											65	2175	2685	3145	3655	4115	4625
											50	2350	2900	3400	3950	4450	5000
											40	2490	3075	3605	4185	4715	5300
											30	2595	3200	3755	4360	4915	5520
	540/80 R 38	172 A8/167 D	W 18 L	W 16 L	550	1829	833	5537	875	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2
											65	2560	3160	3705	4305	4850	5450
											50	2770	3415	4005	4655	5240	5890
											40	2960	3655	4285	4975	5605	6300
											30	3555	4385	5140	5970	6730	7560
∅ 42"	540/80 R 42	168 D/173 A8	W 18 L	W 16 L	560	1931	879	5875	925	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2
											65	2630	3250	3810	4425	4985	5600
											50	2845	3510	4115	4780	5385	6050
											40	3055	3770	4420	5135	5785	6500
											30	3665	4525	5305	6160	6940	7800

STD: Standard

Technology

- High Speed
- Strong Casing
- Larger Footprint
- Block Pattern

Performance

- Road Oriented
- Durability
- Stability
- Fuel Economy
- Heavy Duty

Radial



RIDEMAX IT 697 (M+S)

RIDEMAX IT 697 M+S represents the best response to the needs of modern farming contractors during winter operations. It is perfect for haulage and municipality applications. This winter tire for tractors ensures extraordinary grip for all operations on icy and snowy roads without the need of snow chains being mounted. Thanks to the tread grooves and the strong casing, a tractor can be driven in full stability, also at high speed levels. The tread design has been specially developed for heavy-duty services and ensures a low rolling resistance that provides fuel economy plus great stability.

RIDEMAX
RADIAL TRANSPORT TIRES

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire) km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2
∅ 28"	480/65 R 28	149 D/154 A8	DW 15 L	-	480	1335	615	4088	650	STD	65	1530	1885	2210	2570	2895	3250
											50	1650	2035	2385	2775	3125	3510
											40	1765	2175	2550	2965	3340	3750
											30	1835	2260	2650	3080	3470	3900
	540/65 R 28	155 D/160 A8	W 16 L	W 18	530	1413	642	4276	675	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2
											65	1820	2250	2635	3060	3450	3875
											50	1965	2425	2845	3305	3725	4185
											40	2115	2610	3060	3555	4005	4500
											30	2185	2695	3160	3675	4140	4650
∅ 30"	540/65 R 30	156 D/161 A8	W 16 L	W 18	530	1464	661	4434	700	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2
											65	1880	2320	2720	3160	3560	4000
											50	2030	2505	2940	3415	3845	4320
											40	2175	2685	3145	3655	4115	4625
											30	2255	2785	3265	3790	4270	4800
	600/70 R 30	166 D/171 A8	DW 18 L	DW 20 B	600	1600	688	4820	750	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2
											65	2490	3075	3605	4185	4715	5300
											50	2690	3320	3895	4525	5095	5725
											40	2890	3565	4180	4860	5475	6150
											30	2990	3690	4325	5025	5660	6360
∅ 38"	600/65 R 38	166 D/170 A8	DW 18 B	-	590	1745	795	5315	825	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2
											65	2490	3075	3605	4185	4715	5300
											50	2690	3320	3895	4525	5095	5725
											40	2820	3480	4080	4740	5340	6000
											30	2990	3690	4325	5025	5660	6360
	650/65 R 38	170 D/175 A8	DW 20 B	DW 18 L	645	1811	823	5514	875	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2
											65	2820	3480	4080	4740	5340	6000
											50	3045	3760	4405	5120	5765	6480
											40	3245	4000	4690	5450	6140	6900
											30	3385	4175	4895	5690	6410	7200
∅ 42"	650/65 R 42	171 D/176 A8	DW 20 B	DW 18 L	645	1920	880	5869	925	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2
											65	2890	3565	4180	4860	5475	6150
											50	3125	3855	4520	5250	5915	6645
											40	3335	4120	4830	5610	6320	7100
											30	3470	4280	5020	5830	6570	7380
	710/70 R 42	180 D/185 A8	DW23 B	-	716	2068	926	6264	975	STD	km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2
											65	3760	4640	5440	6320	7120	8000
											50	4060	5010	5875	6825	7690	8640
											40	4350	5365	6290	7310	8235	9250
											30	4510	5570	6530	7585	8545	9600

STD: Standard

Technology

- High Speed
- Strong Casing
- Larger Footprint
- Block Pattern

Performance

- Road Oriented
- Ice and Snow
- Durability
- Stability
- Fuel Economy
- Heavy Duty

TRACTOR

Bias



TR 118

TR 118 has been engineered for irrigation machinery. Its specially designed tread pattern provides excellent traction and outstanding self-cleaning properties. TR 118 features a particularly deep tread along with a strong nylon casing, which enable a longer service life.

∅ 24"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 1.80
	14.9 - 24	W 13	W 12 ; W 11	380	1265	566	3742	STD	8	TL	128 A6		**30**	1800

STD: Standard

Technologies

More Lugs



TRACTOR

Bias



TR 126 (R-1)

TR 126 is designed to fit small tractors in soil tillage operations and is particularly suitable on muddy ground. The deep lugs and the tread pattern provide excellent traction and outstanding self-cleaning features providing best tire performance in all operating conditions.

∅ 14"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	1.90
	6 - 14	5 JA ; 5 KB	-	157	655	305	1978	STD	4	TT	66 A6		30	300
	6 - 14	5 JA ; 5 KB	-	157	655	305	1978	STD	4	TL	66 A6		km/h - bar 30	1.90 300
	7 - 14	5 JA ; 5 KB	-	170	690	320	2070	STD	4	TT	72 A6		km/h - bar 30	1.60 355
	7 - 14	5 JA ; 5 KB	-	170	690	320	2070	STD	4	TL	72 A6		km/h - bar 30	1.60 355
	7 - 14	5 JA ; 5 KB	-	170	690	320	2070	STD	8	TT	95 A6		km/h - bar 30	4.00 355

STD: Standard

Performance

High Load Capacity

Traction



TRACTOR

Bias



TR 128

TR 128 has been specially designed for utility tractors and rototillers. The wide and deep lug design provides an extended tire service life. TR 128 features maximum traction on wet soil as well as superior self-cleaning properties and a strong nylon casing.

∅ 12"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.40
	5 - 12	4 JA	-	127	554	265	1638	STD	4	TT	-		30	220
													km/h - bar	3.50
	5 - 12	4 JA	-	127	554	265	1638	STD	6	TT	-		30	280
													km/h - bar	1.80
	6.00 - 12	4.00 E	4.00 E DT	160	635	303	1910	STD	4	TT	-		30	325
													km/h - bar	2.60
	6.00 - 12	4.00 E	4.00 E DT	160	635	303	1910	STD	6	TT	-		30	400
	180/85 D 12	5 JA	-	165	612	295	1847	STD	4	TT	63 A6		km/h - bar	1.60
													30	272
	180/85 D 12	5 JA	-	165	612	295	1847	STD	6	TT	-		km/h - bar	2.50
													30	355
∅ 14"	**7 - 14**	5 JA	5 J	173	690	334	2094	STD	8	TT	-		km/h - bar	4.00
													30	685


STD: Standard

Performance

High Load Capacity

Traction

Cut and Chip Resistance

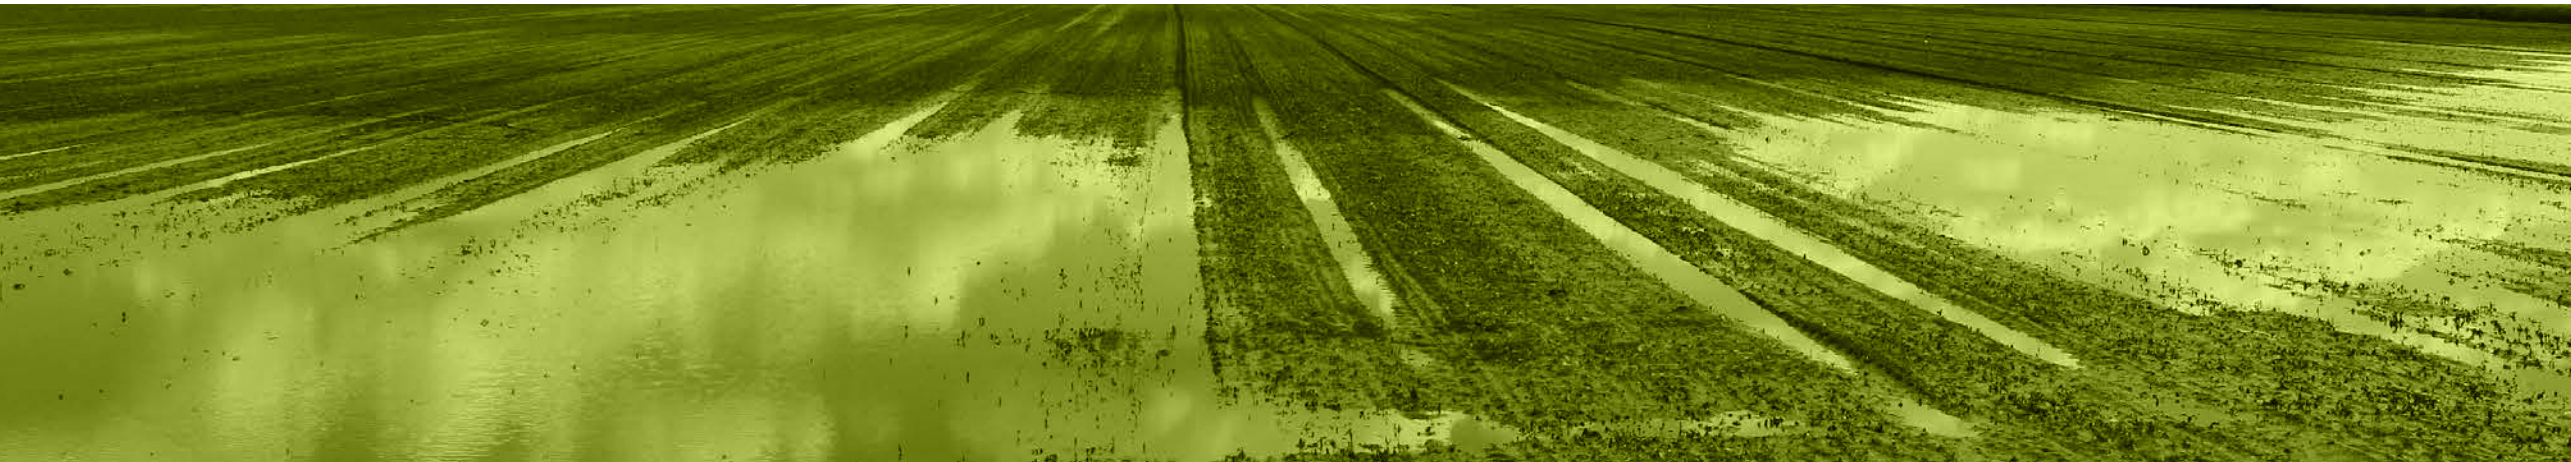

TRACTOR

Bias



TR 133 (R-1)

TR 133 has been specially designed for harvesters, tractors, sprayers and trailers in harvesting, soil tillage and spraying applications. It features excellent traction and outstanding comfort as well as enhanced self-cleaning properties. TR 133 provides an extended tire life-cycle.

∅ 38"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 2.50
	13.6 - 38	W 12	W 11	350	1580	735	4843	STD	10	TT	136 A6		30	2240

STD: Standard

Technologies

More Lugs

Performance

Self-Cleaning

Traction

High Load Capacity

Durability



Bias



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning proprieties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.

∅ 20" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.10
8.00 - 20	5.50 F	-	225	965	448	2837	STD	6	TT	105 A6		30	925
8.00 - 20	5.50 F	-	225	965	448	2837	STD	8	TT	111 A6		km/h - bar	2.80
												30	1090
9.5 - 20	W 8	W 7	240	955	444	2913	STD	6	TT	102 A6		km/h - bar	2.20
												30	850
9.5 - 20	W 8	W 7	240	955	444	2913	STD	6	TL	102 A6		km/h - bar	2.20
												30	850
9.5 - 20	W 8	W 7	240	955	444	2913	STD	8	TT	107 A6		km/h - bar	2.80
												30	975
9.5 - 20	W 8	W 7	240	955	444	2913	HD	8	TT	107 A6		km/h - bar	2.80
												30	975
10.00 - 20	7.5	-	280	1075	495	3160	STD	10	TT	152 A2		km/h - bar	4.80
												10	3550
11.2 - 20	W 10	W 9 ; 9	292	1020	466	3077	STD	8	TT	111 A6		km/h - bar	2.40
												30	1090
12.4 - 20	W 11	W 9 ; 9 ; W 10 ; 11	325	1075	500	3160	STD	8	TT	116 A6		km/h - bar	2.10
												30	1250
12.4 - 20	W 11	W 9 ; 9 ; W 10 ; 11	325	1075	500	3160	HD	8	TT	116 A6		km/h - bar	2.10
												30	1250

STD: Standard - HD: Heavy Duty

Technologies

- Special Compound
- Reinforced Carcass

Performance

- Traction
- High Load Capacity
- Self-Cleaning
- Durability
- Cut and Chip Resistance

TR 135 (R-1)

∅ 24" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire)	
												km/h - bar	2.40
8.3 - 24	W 7	W 6	211	995	469	2985	STD	6	TT	100 A6		30	800
												km/h - bar	3.10
8.3 - 24	W 7	W 6	211	995	469	2985	STD	8	TT	105 A6		30	925
												km/h - bar	3.10
8.3 - 24	W 7	W 6	211	995	469	2985	HD	8	TT	105 A6		30	925
												km/h - bar	4.00
8.3 - 24	W 7	W 6	211	995	469	2985	HD	10	TT	111 A6		30	1090
												km/h - bar	2.10
9.5 - 24	W 8	W 7	232	1056	502	3234	STD	6	TT	106 A6		30	950
												km/h - bar	2.10
9.5 - 24	W 8	W 7	232	1056	502	3234	STD	6	TL	106 A6		30	950
												km/h - bar	2.80
9.5 - 24	W 8	W 7	232	1056	502	3234	STD	8	TT	112 A6		30	1120
												km/h - bar	2.80
9.5 - 24	W 8	W 7	232	1056	502	3234	HD	8	TT	112 A6		30	1120
												km/h - bar	3.50
9.5 - 24	W 8	W 7	232	1056	502	3234	STD	10	TT	116 A6		30	1250
												km/h - bar	3.50
9.5 - 24	W 8	W 7	232	1056	502	3234	HD	10	TT	116 A6		30	1250
												km/h - bar	1.80
11.2 - 24	W 10	W 9	284	1105	517	3399	STD	6	TT	110 A6		30	1060
												km/h - bar	2.40
11.2 - 24	W 10	W 9	284	1105	517	3399	STD	8	TT	116 A6		30	1250
												km/h - bar	2.40
11.2 - 24	W 10	W 9	284	1105	517	3399	STD	8	TL	116 A6		30	1250

STD: Standard - HD: Heavy Duty

Technologies

- Special Compound
- Reinforced Carcass

Performance

- Traction
- High Load Capacity
- Self-Cleaning
- Durability
- Cut and Chip Resistance

TR 135 (R-1)

∅ 24" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.40
11.2 - 24	W 10	W 9	284	1105	517	3398	HD	8	TT	116 A6		30	1250
11.2 - 24	W 10	W 9	284	1105	517	3399	HD	10	TT	120 A6		km/h - bar 30	3.00 1400
12.4 - 24	W 11	W 9 ; W 10	315	1160	543	3573	STD	6	TT	115 A6		km/h - bar 30	1.70 1215
12.4 - 24	W 11	W 9 ; W 10	315	1160	543	3573	STD	8	TT	121 A6		km/h - bar 30	2.30 1450
12.4 - 24	W 11	W 9 ; W 10	315	1160	543	3573	STD	8	TL	121 A6		km/h - bar 30	2.30 1450
12.4 - 24	W 11	W 9 ; W 10	315	1160	543	3573	HD	8	TT	121 A6		km/h - bar 30	2.30 1450
12.4 - 24	W 11	W 9 ; W 10	315	1160	543	3573	HD	8	TL	121 A6		km/h - bar 30	2.30 1450
12.4 - 24	W 11	W 9 ; W 10	315	1160	543	3573	HD	8	TT	121 A6		km/h - bar 30	2.30 1450
12.4 - 24	W 11	W 9 ; W 10	315	1160	543	3573	STD	10	TT	125 A6		km/h - bar 30	2.90 1650
12.4 - 24	W 11	W 9 ; W 10	315	1160	543	3573	STD	12	TT	128 A6		km/h - bar 30	3.50 1800
12.4 - 24	W 11	W 9 ; W 10	315	1160	543	3573	STD	12	TL	128 A6		km/h - bar 30	3.50 1800
12.4 - 24	W 11	W 9 ; W 10	315	1160	543	3573	SPL	12	TT	128 A6		km/h - bar 30	3.50 1800
13.6 - 24	W 12	W 11	355	1220	562	3698	STD	8	TT	123 A6		km/h - bar 30	2.00 1550

STD: Standard - HD: Heavy Duty - SPL: Special

Technologies

Special Compound

Reinforced Carcass

Performance

Traction

High Load Capacity

Self-Cleaning

Durability

Cut and Chip Resistance

TR 135 (R-1)

∅ 24" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	Load capacity (kg/tire) km/h - bar	2.00
13.6 - 24	W 12	W 11	355	1220	562	3698	STD	8	TL	123 A6	30	1550
13.6 - 24	W 12	W 11	355	1220	562	3698	HD	8	TT	123 A6	km/h - bar / 30	2.00 / 1550
13.6 - 24	W 12	W 11	355	1220	562	3698	STD	12	TT	130 A6	km/h - bar / 30	2.90 / 1900
13.6 - 24	W 12	W 11	355	1220	562	3698	HD	12	TT	130 A6	km/h - bar / 30	2.90 / 1900
14.9 - 24	W 13	W 12 ; W 11	378	1265	576	3837	STD	8	TT	128 A6	km/h - bar / 30	1.80 / 1800
14.9 - 24	W 13	W 12 ; W 11	378	1265	576	3837	STD	8	TL	128 A6	km/h / bar / 30	1.80 / 1800
14.9 - 24	W 13	W 11 ; W 12	378	1265	576	3837	HD	8	TT	128 A6	km/h - bar / 30	1.80 / 1800
14.9 - 24	W 13	W 11 ; W 12	378	1265	576	3837	HD	8	TL	128 A6	km/h - bar / 30	1.80 / 1800
14.9 - 24	W 13	W 12 ; W 11	378	1265	576	3837	HD	10	TL	132 A6	km/h - bar / 30	2.30 / 2000
14.9 - 24	W 13	W 11 ; W 12	378	1265	576	3837	STD	12	TT	135 A6	km/h - bar / 30	2.60 / 2180
14.9 - 24	W 13	W 12 ; W 11	378	1265	576	3837	STD	12	TL	135 A6	km/h - bar / 30	2.60 / 2180
16.9 - 24	W 15 L	W 14 L	429	1335	613	3925	STD	8	TT	133 A6	km/h - bar / 30	1.70 / 2060
16.9 - 24	W 15 L	W 14 L	429	1335	613	3925	STD	8	TL	133 A6	km/h - bar / 30	1.70 / 2060
16.9 - 24	W 15 L	W 14 L	429	1335	613	3925	HD	8	TT	133 A6	km/h - bar / 30	1.70 / 2060

Technologies

Special Compound

Reinforced Carcass

Performance

Traction

High Load Capacity

Self-Cleaning

Durability

Cut and Chip Resistance

STD: Standard - HD: Heavy Duty

TR 135 (R-1)

∅ 24"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.00
	16.9 - 24	W 15 L	W 14 L	429	1335	613	3925	STD	10	TT	136 A6		30	2240
	16.9 - 24	W 15 L	W 14 L	429	1335	613	3925	STD	10	TL	136 A6		km/h - bar 30	2.00 2240
	16.9 - 24	W 15 L	W 14 L	429	1335	613	3925	STD	12	TT	140 A6		km/h - bar 30	2.40 2500
	16.9 - 24	W 15 L	W 14 L	429	1335	613	3925	HD	12	TT	140 A6		km/h - bar 30	2.40 2500
∅ 26"	**14.9 - 26**	W 13	W 11 ; W 12	375	1315	608	3863	STD	8	TT	129 A6		km/h - bar 30	1.80 1850
	14.9 - 26	W 13	W 11 ; W 12	375	1315	608	3863	HD	8	TT	129 A6		km/h - bar 30	1.80 1850
	14.9 - 26	W 13	W 11 ; W 12	375	1315	608	3863	STD	12	TT	136 A6		km/h - bar 30	2.70 2240
	16.9 - 26	W 15 L	W 14 L	430	1380	625	4183	STD	10	TT	137 A6		km/h - bar 30	2.00 2300
	16.9 - 26	W 15 L	W 14 L	430	1380	625	4183	STD	10	TL	137 A6		km/h - bar 30	2.00 2300
	16.9 - 26	W 15 L	W 14 L	430	1380	625	4183	STD	12	TT	140 A6		km/h - bar 30	2.30 2500
	23.1 - 26	DW 20 B ; DW 20 A	-	587	1585	700	4615	STD	12	TL	153 A6		km/h - bar 30	1.70 3650
	23.1 - 26	DW 20 B ; DW 20 A	-	587	1585	700	4615	STD	12	TT	153 A6		km/h - bar 30	1.70 3650
	23.1 - 26	DW 20 B ; DW 20 A	-	587	1585	700	4615	STD	12	TL	153 A6		km/h - bar 30	1.70 3650

STD: Standard - HD: Heavy Duty

Technologies

- Special Compound
- Reinforced Carcass

Performance

- Traction
- High Load Capacity
- Self-Cleaning
- Durability
- Cut and Chip Resistance

TR 135 (R-1)

∅ 26"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 1.70
	23.1 - 26	DW 20 B ; DW 20 A	-	587	1585	700	4615	DB	12	TL	153 A6		30	3650
	23.1 - 26	DW 20 B ; DW 20 A	-	587	1585	700	4615	DB	12	TT	153 A6		km/h - bar 30	1.70 3650
	23.1 - 26	DW 20 B ; DW 20 A	-	587	1585	700	4615	STD	14	TL	156 A6		km/h - bar 30	2.00 4000
	23.1 - 26	DW 20 B ; DW 20 A	-	587	1585	700	4615	STD	16	TL	159 A6		km/h - bar 30	2.30 4375
	23.1 - 26	DW 20 B ; DW 20 A	-	587	1585	700	4615	STD	16	TT	159 A6		km/h - bar 30	2.30 4375
	23.1 - 26	DW 20 B ; DW 20 A	-	587	1585	700	4615	DB	16	TL	159 A6		km/h - bar 30	2.30 4375
	23.1 - 26	DW 20 B ; DW 20 A	-	587	1585	700	4615	DB HD	16	TL	159 A6		km/h - bar 30	2.30 4375
	23.1 - 26	DW 20 B ; DW 20 A	-	587	1585	700	4615	HD	16	TT	159 A6		km/h - bar 30	2.30 4375
	23.1 - 26	DW 20 B ; DW 20 A	-	587	1585	700	4615	DB	18	TL	161 A6		km/h - bar 30	2.60 4625
∅ 28"	**8.3 - 28**	W 7	W 6	213	1104	523	3246	STD	6	TT	103 A6		km/h - bar 30	2.40 875
	8.3 - 28	W 7	W 6	213	1104	523	3246	STD	8	TT	108 A6		km/h - bar 30	3.20 1000
	9.5 - 28	W 8	W 7	235	1155	542	3381	STD	6	TT	108 A6		km/h - bar 30	2.10 1000
	9.5 - 28	W 8	W 7	235	1155	542	3381	STD	8	TT	114 A6		km/h - bar 30	2.80 1180

STD: Standard - HD: Heavy Duty - DB: Dual Bead - DB HD: Dual Bead HD

Technologies

Special Compound

Reinforced Carcass

Performance

Traction

High Load Capacity

Self-Cleaning

Durability

Cut and Chip Resistance

TR 135 (R-1)

∅ 28" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	Load capacity (kg/tire) km/h - bar	2.40
11.2 - 28	W 10	W 9	284	1205	565	3543	STD	8	TT	118 A6	30	1320
11.2 - 28	W 10	W 9	284	1205	565	3543	STD	8	TL	118 A6	km/h - bar 30	2.40 1320
11.2 - 28	W 10	W 9	284	1205	565	3543	HD	8	TT	118 A6	km/h - bar 30	2.40 1320
11.2 - 28	W 10	W 9	284	1205	565	3543	STD	10	TT	122 A6	km/h - bar 30	3.00 1500
12.4 - 28	W 11	W 9 ; W 10	325	1260	584	3876	STD	6	TT	117 A6	km/h - bar 30	1.70 1285
12.4 - 28	W 11	W 9 ; W 10	325	1260	584	3876	STD	8	TT	123 A6	km/h - bar 30	2.30 1550
12.4 - 28	W 11	W 9 ; W 10	325	1260	584	3876	STD	8	TL	123 A6	km/h - bar 30	2.30 1550
12.4 - 28	W 11	W 9 ; W 10	325	1260	584	3876	HD	8	TT	123 A6	km/h - bar 30	2.30 1550
12.4 - 28	W 11	W 9 ; W 10	325	1260	584	3876	STD	10	TT	127 A6	km/h / bar 30	2.90 1750
12.4 - 28	W 11	W 9 ; W 10	325	1260	584	3876	STD	12	TT	131 A6	km/h - bar 30	3.50 1950
13.6 - 28	W 12	W 11	345	1310	614	4031	STD	8	TT	125 A6	km/h - bar 30	2.00 1650
13.6 - 28	W 12	W 11	345	1310	614	4031	STD	8	TL	125 A6	km/h - bar 30	2.00 1650
13.6 - 28	W 12	W 11	345	1310	614	4031	HD	8	TT	125 A6	km/h - bar 30	2.00 1650

STD: Standard - HD: Heavy Duty

Technologies

- Special Compound
- Reinforced Carcass

Performance

- Traction
- High Load Capacity
- Self-Cleaning
- Durability
- Cut and Chip Resistance

TR 135 (R-1)

∅ 28"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire)	
													km/h - bar	3.00
	13.6 - 28	W 12	W 11	345	1310	614	4031	STD	12	TT	134 A6		30	2120
													km/h - bar	3.50
	13.6 - 28	W 12	W 11	345	1310	614	4031	STD	14	TT	137 A6		30	2300
													km/h - bar	1.40
	14.9 - 28	W 13	W 11 ; W 12	378	1365	634	4170	STD	6	TT	125 A6		30	1650
													km/h - bar	1.80
	14.9 - 28	W 13	W 11 ; W 12	378	1365	634	4170	STD	8	TT	130 A6		30	1900
													km/h - bar	1.80
	14.9 - 28	W 13	W 11 ; W 12	378	1365	634	4170	STD	8	TL	130 A6		30	1900
													km/h - bar	1.80
	14.9 - 28	W 13	W 11 ; W 12	378	1365	634	4170	HD	8	TT	130 A6		30	1900
													km/h - bar	2.60
	14.9 - 28	W 13	W 11 ; W 12	378	1365	634	4170	STD	12	TT	137 A6		30	2300
													km/h - bar	2.60
	14.9 - 28	W 13	W 11 ; W 12	378	1365	634	4170	HD	12	TT	137 A6		30	2300
													km/h - bar	2.90
	14.9 - 28	W 13	W 11 ; W 12	378	1365	634	4170	STD	14	TT	139 A6		30	2430
													km/h - bar	1.70
	18.4 - 28	W 16 L	W 15 L	467	1501	691	4413	STD	8	TL	138 A6		30	2360
													km/h - bar	2.50
	18.4 - 28	W 16 L	W 15 L	467	1501	691	4413	STD	12	TL	147 A6		30	3075
∅ 30"													km/h - bar	2.30
	7.2 - 30	W 6	-	185	1095	523	3219	STD	6	TT	95 A6		30	690

STD: Standard - HD: Heavy Duty

Technologies

- Special Compound
- Reinforced Carcass

Performance

- Traction
- High Load Capacity
- Self-Cleaning
- Durability
- Cut and Chip Resistance

TR 135 (R-1)

∅ 30" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	Load capacity (kg/tire) km/h - bar	2.10
9.5 - 30	W 8	W 7	241	1200	567	3528	STD	6	TT	109 A6	30	1030
											km/h - bar	**2.80**
9.5 - 30	W 8	W 7	241	1200	567	3528	STD	8	TT	115 A6	30	1215
											km/h - bar	**1.80**
14.9 - 30	W 13	W 11 ; W 12	378	1415	659	4316	STD	8	TT	131 A6	30	1950
											km/h - bar	**2.30**
15 - 30	W 16 L	W 15 L	460	1545	714	4542	STD	12	TT	149 A6	30	3250
											km/h - bar	**2.60**
15 - 30	W 16 L	W 15 L	460	1545	714	4542	STD	14	TT	151 A6	30	3450
											km/h - bar	**1.70**
16.9 - 30	W 15 L	W 14 L	429	1485	678	4535	STD	8	TT	137 A6	30	2300
											km/h - bar	**2.00**
16.9 - 30	W 15 L	W 14 L	429	1485	678	4535	STD	10	TT	139 A6	30	2430
											km/h - bar	**2.80**
16.9 - 30	W 15 L	W 14 L	429	1485	678	4535	STD	14	TT	146 A6	30	3000
											km/h - bar	**1.40**
18.4 - 30	W 16 L	W 15 L	460	1545	697	4712	STD	8	TT	139 A6	30	2430
											km/h - bar	**1.40**
18.4 - 30	W 16 L	W 15 L	460	1545	697	4712	HD	8	TT	139 A6	30	2430
											km/h - bar	**1.80**
18.4 - 30	W 16 L	W 15 L	460	1545	697	4712	STD	10	TT	145 A6	30	2900
											km/h - bar	**1.80**
18.4 - 30	W 16 L	W 15 L	460	1545	697	4712	HD	10	TT	145 A6	30	2900
											km/h - bar	**1.80**
18.4 - 30	W 16 L	W 15 L	460	1545	697	4712	HD	10	TL	145 A6	30	2900

STD: Standard - HD: Heavy Duty

Technologies

- Special Compound
- Reinforced Carcass

Performance

- Traction
- High Load Capacity
- Self-Cleaning
- Durability
- Cut and Chip Resistance

TR 135 (R-1)

∅ 30"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.30
	18.4 - 30	W 16 L	W 15 L	460	1545	697	4712	STD	12	TT	149 A6		30	3250
	18.4 - 30	W 16 L	W 15 L	460	1545	697	4712	STD	12	TL	149 A6		30	3250
	18.4 - 30	W 16 L	W 15 L	460	1545	697	4712	HD	12	TT	149 A6		30	3250
	18.4 - 30	W 16 L	W 15 L	460	1545	697	4712	STD	14	TT	151 A6		30	3450
	18.4 - 30	W 16 L	W 15 L	460	1545	697	4712	STD	16	TT	154 A6		30	3750
	23.1 - 30	DW 20 B ; DW 20 A	-	600	1700	780	4998	STD	8	TT	146 A6		30	3000
	23.1 - 30	DW 20 B ; DW 20 A	-	600	1700	780	4998	STD	8	TL	146 A6		30	3000
	23.1 - 30	DW 20 B ; DW 20 A	-	600	1700	780	4998	STD	12	TT	155 A6		30	3875
	23.1 - 30	DW 20 B ; DW 20 A	-	600	1700	780	4998	STD	12	TL	155 A6		30	3875
	23.1 - 30	DW 20 B ; DW 20 A	-	600	1700	780	4998	DB	12	TT	155 A6		30	3875
	23.1 - 30	DW 20 B ; DW 20 A	-	600	1700	780	4998	DB	18	TT	164 A6		30	5000
	23.1 - 30	DW 20 B ; DW 20 A	-	600	1700	780	4998	DB	18	TL	164 A6		30	5000
∅ 32"	**8.3 - 32**	W 7	W 6	211	1195	572	3585	STD	6	TT	105 A6		30	925

STD: Standard - HD: Heavy Duty - DB: Dual Bead

Technologies

- Special Compound
- Reinforced Carcass

Performance

- Traction
- High Load Capacity
- Self-Cleaning
- Durability
- Cut and Chip Resistance

TR 135 (R-1)

∅ 32"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 3.20
	8.3 - 32	W 7	W 6	211	1195	572	3585	STD	8	TT	111 A6		30	1090
	9.5 - 32	W 8	W 7	235	1255	594	3686	STD	6	TT	110 A6		km/h - bar	2.10
													30	1060
	12.4 - 32	W 11	W 9 ; W 10	325	1360	639	3998	STD	6	TT	119 A6		km/h - bar	1.70
													30	1360
	12.4 - 32	W 11	W 9 ; W 10	325	1360	639	3998	STD	8	TT	124 A6		km/h - bar	2.30
													30	1600
	12.4 - 32	W 11	W 9 ; W 10	325	1360	639	3998	HD	8	TT	124 A6		km/h - bar	2.30
													30	1600
	12.4 - 32	W 11	W 9 ; W 10	325	1360	639	3998	HD	10	TT	128 A6		km/h - bar	2.8
													30	1800
∅ 34"	**16.9 - 34**	W 15 L	W 14 L	429	1585	728	4794	STD	8	TT	139 A6		km/h - bar	1.70
													30	2430
	16.9 - 34	W 15 L	W 14 L	429	1585	728	4794	HD	8	TT	139 A6		km/h - bar	1.70
													30	2430
	16.9 - 34	W 15 L	W 14 L	429	1585	728	4794	STD	10	TT	142 A6		km/h - bar	2.00
													30	2650
	16.9 - 34	W 15 L	W 14 L	429	1585	728	4794	HD	10	TT	142 A6		km/h - bar	2.00
													30	2650
	16.9 - 34	W 15 L	W 14 L	429	1585	728	4794	STD	12	TT	144 A6		km/h - bar	2.30
													30	2800
	16.9 - 34	W 15 L	W 14 L	429	1585	728	4794	HD	12	TT	144 A6		km/h - bar	2.30
													30	2800
	18.4 - 34	W 16 L	W 15 L	467	1650	751	5009	STD	6	TT	137 A6		km/h - bar	1.10
													30	2300

STD: Standard - HD: Heavy Duty - DB: Dual Bead

Technologies

- Special Compound
- Reinforced Carcass

Performance

- Traction
- High Load Capacity
- Self-Cleaning
- Durability
- Cut and Chip Resistance

TR 135 (R-1)

∅ 34"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 1.40
	18.4 - 34	W 16 L	W 15 L	467	1650	751	5009	STD	8	TT	142 A6		30	2650
	18.4 - 34	W 16 L	W 15 L	467	1650	751	5009	HD	8	TT	142 A6		30	2650
	18.4 - 34	W 16 L	W 15 L	467	1650	751	5009	STD	10	TT	146 A6		30	3000
	18.4 - 34	W 16 L	W 15 L	467	1650	751	5009	HD	10	TT	146 A6		30	3000
	18.4 - 34	W 16 L	W 15 L	467	1650	751	5009	STD	12	TT	151 A6		30	3450
	18.4 - 34	W 16 L	W 15 L	467	1650	751	5009	HD	12	TT	151 A6		30	3450
	18.4 - 34	W 16 L	W 15 L	467	1650	751	5009	HD SPL	12	TT	151 A6		30	3450
	18.4 - 34	W 16 L	W 15 L	467	1650	751	5009	STD	14	TT	154 A6		30	3750
	18.4 - 34	W 16 L	W 15 L	467	1650	751	5009	HD	14	TT	154 A6		30	3750
	23.1 - 34	DW 20 B ; DW 20 A	-	585	1810	834	5321	STD	10	TT	153 A6		30	3650
	23.1 - 34	DW 20 B ; DW 20 A	-	585	1810	834	5321	STD	10	TL	153 A6		30	3650
∅ 36"	**8.3 - 36**	W 7	W 6	211	1295	628	4028	STD	6	TT	107 A6		30	975
	8.3 - 36	W 7	W 6	211	1295	628	4028	STD	8	TT	113 A6		30	1150

Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 1.40
30	2650
30	2650
30	3000
30	3000
30	3450
30	3450
30	3450
30	3750
30	3750
30	3650
30	3650
30	975
30	1150

Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 2.30
30	2650
30	2650
30	3000
30	3000
30	3450
30	3450
30	3450
30	3750
30	3750
30	3650
30	3650
30	975
30	1150

Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 2.60
30	2650
30	2650
30	3000
30	3000
30	3450
30	3450
30	3450
30	3750
30	3750
30	3650
30	3650
30	975
30	1150

Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 3.20
30	2650
30	2650
30	3000
30	3000
30	3450
30	3450
30	3450
30	3750
30	3750
30	3650
30	3650
30	975
30	1150

STD: Standard - HD: Heavy Duty - HD SPL: HD Special

Technologies

- Special Compound
- Reinforced Carcass

Performance

- Traction
- High Load Capacity
- Self-Cleaning
- Durability
- Cut and Chip Resistance

TR 135 (R-1)

∅ 36" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 3.50
9.5 - 36	W 8	W 7	235	1360	646	4000	STD	10	TT	122 A6		30	1500
12.4 - 36	W 11	W 9 ; W 10	325	1465	691	4307	STD	8	TT	126 A6		km/h - bar 30	2.30 1700
12.4 - 36	W 11	W 9 ; W 10	325	1465	691	4307	HD	8	TT	126 A6		km/h - bar 30	2.30 1700
12.4 - 36	W 11	W 9 ; W 10	325	1465	691	4307	STD	10	TT	131 A6		km/h - bar 30	2.90 1950
12.4 - 36	W 11	W 9 ; W 10	325	1465	691	4307	HD	10	TT	131 A6		km/h - bar 30	2.30 1700
12.4 - 36	W 11	W 9 ; W 10	325	1465	691	4307	STD	12	TT	135 A6		km/h - bar 30	3.50 2180
12.4 - 36	W 11	W 9 ; W 10	325	1465	691	4307	STD	14	TT	139 A6		km/h - bar 30	4.10 2430
12.4 - 36	W 11	W 9 ; W 10	325	1465	691	4307	HD	14	TL	139 A6		km/h / bar 30	4.10 2430
12.4 - 36	W 11	W 9 ; W 10	325	1465	691	4307	HD	14	TT	139 A6		km/h - bar 30	3.10 2430
13.6 - 36	W 12	W 11	345	1515	713	4454	STD	6	TT	125 A6		km/h - bar 30	1.60 1650
13.6 - 36	W 12	W 11	345	1515	713	4454	STD	8	TT	129 A6		km/h - bar 30	2.00 1850
13.6 - 36	W 12	W 11	345	1515	713	4454	STD	10	TT	134 A6		km/h - bar 30	2.50 2120
13.6 - 36	W 12	W 11	345	1515	713	4454	HD	10	TT	134 A6		km/h - bar 30	2.50 2120

STD: Standard - HD: Heavy Duty

Technologies

Special Compound

Reinforced Carcass

Performance

Traction

High Load Capacity

Self-Cleaning

Durability

Cut and Chip Resistance

TR 135 (R-1)

∅ 38" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	Load capacity (kg/tire) km/h - bar	30	2.30
12.4 - 38	W 11	W 9 ; W 10	315	1525	718	4670	STD	8	TT	127 A6			1750
12.4 - 38	W 11	W 9 ; W 10	315	1525	718	4670	STD	14	TT	138 A6			3.70 / 2360
12.4 - 38	W 11	W 9 ; W 10	315	1525	718	4670	STD	14	TL	138 A6			3.70 / 2360
13.6 - 38	W 12	W 11	345	1565	735	4832	STD	8	TT	131 A6			2.00 / 1950
13.6 - 38	W 12	W 11	345	1565	735	4832	HD	8	TT	131 A6			2.00 / 1950
13.6 - 38	W 12	W 11	345	1565	735	4832	STD	12	TT	139 A6			3.00 / 2430
13.6 - 38	W 12	W 11	345	1565	735	4832	HD	12	TT	139 A6			3.00 / 2430
13.6 - 38	W 12	W 11	345	1565	735	4832	STD	14	TT	142 A6			3.50 / 2650
14.00 - 38	W 12	W11	345	1565	735	4832	STD	8	TT	131 A6			2.00 / 1950
14.00 - 38	W 12	W 11	345	1565	735	4832	SPL	12	TT	139 A6			3.00 / 2430
15.5 - 38	W 14 L	-	395	1585	746	4660	STD	8	TT	133 A6			1.80 / 2060
15.5 - 38	W 14 L	-	395	1585	746	4660	HD	8	TT	133 A6			1.80 / 2060
15.5 - 38	W 14 L	-	395	1585	746	4660	HD	8	TL	133 A6			1.80 / 2060

STD: Standard - HD: Heavy Duty - SPL: Special

Technologies

- Special Compound
- Reinforced Carcass

Performance

- Traction
- High Load Capacity
- Self-Cleaning
- Durability
- Cut and Chip Resistance

TR 135 (R-1)

∅ 38" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	Load capacity (kg/tire) km/h - bar	2.30
15.5 - 38	W 14 L	-	395	1585	746	4660	STD	10	TT	138 A6	30	2360
15.5 - 38	W 14 L	-	395	1585	746	4660	HD	10	TT	138 A6	km/h - bar	2.30
											30	2360
15.5 - 38	W 14 L	-	395	1585	746	4660	STD	12	TT	141 A6	km/h - bar	2.80
											30	2575
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	STD	8	TT	141 A6	km/h - bar	1.70
											30	2575
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	HD	8	TT	141 A6	km/h - bar	1.70
											30	2575
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	STD	10	TT	143 A6	km/h - bar	2.00
											30	2725
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	HD	10	TT	143 A6	km/h - bar	2.00
											30	2725
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	STD	12	TT	146 A6	km/h - bar	2.30
											30	3000
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	STD	8	TT	143 A6	km/h - bar	1.40
											30	2725
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	HD	8	TT	143 A6	km/h - bar	1.40
											30	2725
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	HD	10	TT	148 A6	km/h - bar	1.80
											30	3150
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	HD	10	TL	148 A6	km/h - bar	1.80
											30	3150
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	STD	12	TT	153 A6	km/h - bar	2.30
											30	3650

STD: Standard - HD: Heavy Duty

Technologies

- Special Compound
- Reinforced Carcass

Performance

- Traction
- High Load Capacity
- Self-Cleaning
- Durability
- Cut and Chip Resistance

TR 135 (R-1)

∅ 38"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 2.30
	18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	STD	12	TL	153 A6		30	3650
	18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	HD	12	TT	153 A6		km/h - bar 30	2.30 3650
	20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	STD	8	TT	148 A6		km/h - bar 30	1.30 3150
	20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	STD	12	TT	156 A6		km/h - bar 30	2.00 4000
	20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	STD	12	TL	156 A6		km/h - bar 30	2.00 4000
	20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	HD	12	TT	156 A6		km/h - bar 30	2.00 4000
	20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	STD	14	TT	160 A6		km/h - bar 30	2.40 4500
	20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	DB HD	16	TT	163 A6		km/h - bar 30	2.80 4875
	20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	DB HD	18	TT	166 A6		km/h - bar 30	3.20 5300
	20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	DB HD	18	TL	166 A6		km/h - bar 30	3.20 5300
∅ 42"	**9.5 - 42**	W 8	W 7	246	1510	721	4663	STD	10	TT	125 A6		km/h - bar 30	3.50 1650
	12.4 - 42	W 10 ; W 10 A	-	322	1630	770	5011	STD	10	TL	134 A6		km/h - bar 30	2.80 2120
	20.8 - 42	W 18 L	W 16 L	535	1950	909	5733	STD	12	TT	158 A6		km/h - bar 30	2.00 4250

STD: Standard - HD: Heavy Duty - DB HD: Dual Bead HD

Technologies

Special Compound

Reinforced Carcass

Performance

Traction

High Load Capacity

Self-Cleaning

Durability

Cut and Chip Resistance

TRACTOR

TR 135 (R-1)

∅ 42"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.00	2.80	3.20
	20.8 - 42	W 18 L	W 16 L	535	1950	909	5733	STD	12	TL	158 A6		30	4250		
	20.8 - 42	W 18 L	W 16 L	535	1950	909	5733	STD	16	TL	165 A6		30		5150	
	20.8 - 42	W 18 L	W 16 L	535	1950	909	5733	DB HD	18	TL	168 A6		30			5600

STD: Standard - DB HD: Dual Bead HD

Technologies

Special Compound

Reinforced Carcass

Performance

Traction

High Load Capacity

Self-Cleaning

Durability

Cut and Chip Resistance



Bias



TR 136 (R-1)

TR 136 has been developed by BKT to equip tractors and trailers in soil tillage and transport operations. This tire provides improved traction in all working conditions along with best cut and chip resistance to reduce machine downtime and increase your productivity.

∅ 26"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.30
	18.4 - 26	W 16 L	W 15 L	480	1450	646	4205	STD	12	TL	146 A6		30	3000
	18.4 - 26	W 16 L	W 15 L	480	1450	646	4205	STD	12	TT	146 A6		km/h - bar	2.30
													30	3000
	18.4 - 26	W 16 L	W 15 L	480	1450	646	4205	SPL	12	TL	146 A6		km/h - bar	2.30
													30	3000
	18.4 - 26	W 16 L	W 15 L	480	1450	646	4205	STD	14	TL	150 A6		km/h - bar	2.60
													30	3350
∅ 28"	**12.4 - 28**	W 11	W 9 ; W 10	315	1275	595	3749	STD	8	TT	123 A6		km/h - bar	2.30
													30	1550
∅ 30"	**16.9 - 30**	W 15 L	W 14 L	429	1485	677	4455	STD	8	TT	137 A6		km/h - bar	1.70
													30	2300
	16.9 - 30	W 15 L	W 14 L	429	1485	677	4455	HD	8	TT	137 A6		km/h - bar	1.70
													30	2300
	16.9 - 30	W 15 L	W 14 L	429	1485	677	4455	SPL	8	TT	137 A6		km/h - bar	1.70
													30	2300
	16.9 - 30	W 15 L	W 14 L	429	1485	677	4455	STD	10	TT	139 A6		km/h - bar	2.00
													30	2430
	16.9 - 30	W 15 L	W 14 L	429	1485	677	4455	STD	12	TT	143 A6		km/h - bar	2.40
													30	2725
	16.9 - 30	W 15 L	W 14 L	429	1485	677	4455	SPL	12	TT	143 A6		km/h - bar	2.40
													30	2725

STD: Standard - HD: Heavy Duty - SPL: Special

Technologies

More Lugs

Special Compound

Performance

Durability

High Load Capacity

Traction

Cut and Chip Resistance

TRACTOR

TR 136 (R-1)

∅ 30” Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.40
16.9 - 30	W 15 L	W 14 L	429	1485	677	4455	SPL	12	TL	143 A6		30	2725
												km/h - bar	2.80
16.9 - 30	W 15 L	W 14 L	429	1485	677	4455	STD	14	TT	146 A6		30	3000
												km/h - bar	1.40
18.4 - 30	W 16 L	W 15 L	465	1545	712	4719	STD	8	TT	139 A6		30	2430
												km/h - bar	1.40
18.4 - 30	W 16 L	W 15 L	465	1545	712	4719	HD	8	TT	139 A6		30	2430
												km/h - bar	2.30
18.4 - 30	W 16 L	W 15 L	465	1545	712	4719	HD	12	TT	149 A6		30	3250
												km/h - bar	2.30
18.4 - 30	W 16 L	W 15 L	465	1545	712	4719	SPL	12	TT	149 A6		30	3250
												km/h - bar	2.60
18.4 - 30	W 16 L	W 15 L	465	1545	712	4719	HD	14	TT	151 A6		30	3450

STD: Standard - HD: Heavy Duty - SPL: Special

Technologies

More Lugs

Special Compound

Performance

Durability

High Load Capacity

Traction

Cut and Chip Resistance



Bias



TR 144 (R-1)

TR 144 is suitable to equip small tractors to be used in soil tillage operations. It has been specially designed for wet conditions as you can find on wet and loose soil, and paddy fields. TR 144 ensures outstanding performance in all operating conditions which require both excellent traction and self-cleaning features. TR 144 is also available in a "special" version, which is best suitable for heavy-duty service.

∅ 16" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 1.60
7 - 16	6 L ; 6 LB ; 6.00 F	-	183	740	344	2223	STD	4	TT	75 A6		30	387
7 - 16	6 L ; 6 LB ; 6.00 F	-	183	740	344	2223	STD	4	TL	75 A6		30	387
7 - 16	6 L ; 6 LB ; 6.00 F	-	183	740	344	2223	STD	6	TT	84 A6		30	500
8 - 16	6 L ; 6 LB ; 6.00 F	-	200	785	358	2342	STD	4	TT	83 A6		30	487
8 - 16	6 L ; 6 LB ; 6.00 F	-	200	785	358	2342	HD	4	TT	83 A6		30	487
8 - 16	6 L ; 6 LB ; 6.00 F	-	200	785	358	2342	STD	6	TT	91 A6		30	615
8 - 16	6 L ; 6 LB ; 6.00 F	-	200	785	358	2342	STD	6	TL	91 A6		30	615
8 - 16	6 L ; 6 LB ; 6.00 F	-	200	785	358	2342	SPL	6	TT	91 A6		30	615
8 - 16	6 L ; 6 LB ; 6.00 F	-	200	785	358	2342	STD	8	TT	98 A6		30	750
9.5 - 16	W 8 L	8 LB	245	850	392	2465	STD	6	TT	96 A6		30	710
9.5 - 16	W 8 L	8 LB	245	850	392	2465	STD	6	TL	96 A6		30	710

Performance

High Load Capacity

Traction

STD: Standard - HD: Heavy Duty - SPL: Special

TR 144 (R-1)

Performance

High Load Capacity

Traction

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire)	
∅ 16"													km/h - bar	2.80
	9.5 - 16	W 8 L	8 LB	245	850	392	2465	STD	8	TT	102 A6		30	850
	9.5 - 16	W 8 L	8 LB	245	850	392	2465	STD	8	TL	102 A6		km/h - bar	2.80
													30	850
∅ 18"	8 - 18	W 6	W 7 ; 5.50 F	200	840	385	2509	STD	4	TT	85 A6		km/h - bar	1.20
													30	515
	8 - 18	W 6	W 7 ; 5.50 F	200	840	385	2509	STD	6	TT	94 A6		km/h - bar	1.90
													30	670
	8 - 18	W 6	W 7 ; 5.50 F	200	840	385	2509	HD	6	TT	94 A6		km/h - bar	1.90
													30	670
	8 - 18	W 6	W 7 ; 5.50 F	200	840	385	2509	SPL	6	TT	94 A6		km/h - bar	1.90
													30	670
	8 - 18	W 6	W 7 ; 5.50 F	200	840	385	2509	STD	8	TT	100 A6		km/h - bar	2.60
													30	800
	8 - 18	W 6	W 7 ; 5.50 F	200	840	385	2509	SPL	8	TT	100 A6		km/h - bar	2.60
													30	800
∅ 20"	8.3 - 20	W 7	W 6	211	890	414	2670	STD	6	TT	96 A6		km/h - bar	2.40
													30	710
	8.3 - 20	W 7	W 6	211	890	414	2670	HD	6	TT	96 A6		km/h - bar	2.40
													30	710
∅ 22"	9.5 - 22	W 7	W 8	235	1000	458	2985	STD	6	TT	104 A6		km/h - bar	2.20
													30	900

STD: Standard - HD: Heavy Duty - SPL: Special

TRACTOR

Bias



TR 145 (R-1)

TR 145 has been specifically designed for small tractors. The special tread pattern provides excellent traction and outstanding self-cleaning properties. The wide and deep lug design ensures an extended tire service life. The TR 145 tire has a large contact area which offers excellent driving comfort and high directional stability.

∅ 12"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 2.50
	160/90 - 12	4.00	-	160	631	294	1969	STD	6	TT	76 A6		30	400

STD: Standard

Performance

Durability

Self-Cleaning

Traction



Bias



TR 171 (R-1 W+)

TR 171 is a deep tread tire suitable for tractors in soil tillage operations. Thanks to its outstanding self-cleaning properties, it is ideal for wet and moist soil. Also in the harshest operating conditions, TR 171 provides excellent traction and extraordinary durability.

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.00
∅ 12"	5.00 - 12	3.00 D DT ; 3.00 D	4 JA ; 3.50 B	130	580	271	1731	STD	4	TT	61 A6		30	257
	5.00 - 12	3.00 D DT ; 3.00 D	4 JA ; 3.50 B	130	580	271	1731	STD	6	TT	67 A6		km/h - bar	2.80
													30	307
	6.00 - 12	4.00 E DT ; 4.00 E	4 JA	160	635	293	1901	STD	6	TT	76 A6		km/h - bar	2.60
													30	400
∅ 16"	9.5 - 16	W 8 L	8 LB	241	845	392	2499	STD	6	TT	96 A6		km/h - bar	2.10
													30	710
∅ 18"	8 - 18	W 6	W 7 ; 5.50 F	190	845	390	2438	STD	4	TT	85 A6		km/h - bar	1.20
													30	515
	8 - 18	W 6	W 7 ; 5.50 F	190	845	390	2438	STD	6	TT	94 A6		km/h - bar	1.90
													30	670
	8 - 18	W 6	W 7 ; 5.50 F	190	845	390	2438	STD	8	TT	100 A6		km/h - bar	2.60
													30	800
	9.5 - 18	W 8	-	241	900	417	2646	STD	8	TT	105 A6		km/h - bar	3.00
													30	925
∅ 20"	8.3 - 20	W 7	W 6	200	895	4119	2608	STD	6	TT	96 A6		km/h - bar	2.40
													30	710
	8.3 - 20	W 7	W 6	200	895	419	2608	HD	6	TT	96 A6		km/h - bar	2.40
													30	710

STD: Standard - HD: Heavy Duty

Technologies

Special Compound

Extra Deep Tread

Performance

Traction

High Load Capacity

Self-Cleaning

Durability

TR 171 (R-1 W+)

∅ 20"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 3.20
	8.3 - 20	W 7	W 6	200	895	419	2608	STD	8	TT	101 A6	30	825
	8.3 - 20	W 7	W 6	200	895	419	2608	HD	8	TT	101 A6	30	825
	9.5 - 20	W 8	W 7	235	950	442	2835	STD	6	TT	101 A6	30	825
	9.5 - 20	W 8	W 7	235	950	442	2835	STD	8	TT	107 A6	30	975
	9.5 - 20	W 8	W 7	235	950	442	2835	HD	8	TT	107 A6	30	975
	11.2 - 20	W 10	W 9 ; 9	285	1005	465	3000	STD	8	TT	113 A6	30	1150
	11.2 - 20	W 10	W 9 ; 9	285	1005	465	3000	STD	10	TT	113 A6	-	-
∅ 22"	8.3 - 22	W 7	W 6	205	945	444	2778	STD	8	TT	104 A6	30	900
	9.5 - 22	W 8	W 7	235	1005	469	2955	STD	8	TT	110 A6	30	1060
∅ 24"	8.3 - 24	W 7	W 6	200	1005	467	3144	STD	6	TT	100 A6	30	800
	8.3 - 24	W 7	W 6	200	1005	467	3144	STD	8	TT	105 A6	30	925
	8.3 - 24	W 7	W 6	200	1005	467	3144	HD	8	TT	105 A6	30	925
	9.5 - 24	W 8	W 7	236	1066	500	3260	STD	6	TT	106 A6	30	950

STD: Standard - HD: Heavy Duty

Technologies

Special Compound

Extra Deep Tread

Performance

Traction

High Load Capacity

Self-Cleaning

Durability

TR 171 (R-1 W+)

∅ 24" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.80
9.5 - 24	W 8	W 7	236	1066	500	3260	STD	8	TT	111 A6		30	1090
11.2 - 24	W 10	W 9	285	1105	519	3388	STD	6	TT	110 A6		km/h - bar	1.80
												30	1060
11.2 - 24	W 10	W 9	285	1105	519	3388	STD	8	TT	116 A6		km/h - bar	2.40
												30	1250
11.2 - 24	W 10	W 9	285	1105	519	3388	STD	10	TT	120 A6		km/h - bar	3.00
												30	1400
12.4 - 24	W 11	W 9 ; W 10	315	1165	544	3557	STD	4	TT	106 A6		km/h - bar	1.10
												30	950
12.4 - 24	W 11	W 9 ; W 10	315	1165	544	3557	STD	6	TT	115 A6		km/h - bar	1.70
												30	1215
12.4 - 24	W 11	W 9 ; W 10	315	1165	544	3557	STD	8	TT	120 A6		km/h - bar	2.30
												30	1400
12.4 - 24	W 11	W 9 ; W 10	315	1165	544	3557	HD	8	TT	120 A6		km/h - bar	2.30
												30	1400
13.6 - 24	W 12	W 11	355	1210	562	3657	STD	6	TT	119 A6		km/h - bar	1.60
												30	1360
13.6 - 24	W 12	W 11	355	1210	562	3657	STD	8	TT	123 A6		km/h - bar	2.00
												30	1550
14.9 - 24	W 13	W 11 ; W 12	391	1265	575	3792	STD	6	TT	123 A6		km/h - bar	1.40
												30	1550
14.9 - 24	W 13	W 11 ; W 12	391	1265	575	3792	STD	8	TT	128 A6		km/h - bar	1.80
												30	1800

STD: Standard - HD: Heavy Duty

Technologies

Special Compound

Extra Deep Tread

Performance

Traction

High Load Capacity

Self-Cleaning

Durability

TR 171 (R-1 W+)

∅ 26"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.40
	11.2 - 26	W 10	W 9	284	1155	540	3396	STD	8	TT	117 A6		30	1285
	12.4 - 26	W 11	W 10 ; W 9	315	1210	573	3727	STD	8	TT	121 A6		km/h - bar	2.30
													30	1450
	13.6 - 26	W 12	W 11	340	1270	580	3774	STD	4	TT	110 A6		km/h - bar	1.00
													30	1060
	13.6 - 26	W 12	W 11	340	1270	580	3774	STD	6	TT	120 A6		km/h - bar	1.60
													30	1400
	13.6 - 26	W 12	W 11	340	1270	589	3774	STD	8	TT	126 A6		km/h - bar	2.20
													30	1700
	13.6 - 26	W 12	W 11	340	1270	589	3774	HD	12	TT	135 A6		km/h - bar	3.40
													30	2180
∅ 28"	**12.4 - 28**	W 11	W 9 ; W 10	315	1260	589	3860	STD	6	TT	117 A6		km/h - bar	1.70
													30	1285
	12.4 - 28	W 11	W 9 ; W 10	315	1260	589	3860	STD	8	TT	123 A6		km/h - bar	2.30
													30	1550
	12.4 - 28	W 11	W 9 ; W 10	315	1260	589	3860	STD	12	TT	131 A6		km/h - bar	3.50
													30	1950
	13.6 - 28	W 12	W 11	350	1300	614	4013	STD	4	TT	112 A6		km/h - bar	1.00
													30	1120
	13.6 - 28	W 12	W 11	350	1300	614	4013	STD	6	TT	121 A6		km/h - bar	1.60
													30	1450
	13.6 - 28	W 12	W 11	350	1300	614	4013	STD	8	TT	125 A6		km/h - bar	2.00
													30	1650

STD: Standard - HD: Heavy Duty

Technologies

Special Compound

Extra Deep Tread

Performance

Traction

High Load Capacity

Self-Cleaning

Durability

TR 171 (R-1 W+)

∅ 28"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.00
	13.6 - 28	W 12	W 11	350	1300	614	4013	HD	8	TT	125 A6		30	1650
	13.6 - 28	W 12	W 11	350	1300	614	4013	STD	12	TT	134 A6		km/h - bar	3.00
													30	2120
	13.6 - 28	W 12	W 11	350	1300	614	4013	HD	12	TT	134 A6		km/h - bar	3.00
													30	2120
	14.9 - 28	W 13	W 11 ; W 12	388	1370	626	4154	STD	8	TT	130 A6		km/h - bar	-
													-	-
	14.9 - 28	W 13	W 11 ; W 12	388	1370	626	4154	HD	8	TT	130 A6		km/h - bar	1.80
													30	1900
	14.9 - 28	W 13	W 11 ; W 12	388	1370	626	4154	STD	12	TT	137 A6		km/h - bar	2.60
													30	2300
	14.9 - 28	W 13	W 11 ; W 12	388	1370	626	4154	HD	12	TT	137 A6		km/h - bar	2.60
													30	2300
	16.9 - 28	W 15 L	W 14 L	435	1440	663	4387	STD	8	TT	135 A6		km/h - bar	1.70
													30	2180
	16.9 - 28	W 15 L	W 14 L	435	1440	663	4387	STD	12	TT	143 A6		km/h - bar	2.40
													30	2725
∅ 30"	**14.9 - 30**	W 13	W 11 ; W 12	380	1415	659	4160	STD	8	TT	131 A6		km/h - bar	1.80
													30	1950
	16.9 - 30	W 15 L	W 14 L	430	1490	687	4535	STD	8	TT	137 A6		km/h - bar	1.70
													30	2300
	16.9 - 30	W 15 L	W 14 L	430	1490	687	4535	STD	12	TT	143 A6		km/h - bar	2.40
													30	2725
	18.4 - 30	W 16 L	W 15 L	470	1550	710	4706	STD	10	TT	145 A6		km/h - bar	1.80
													30	2900

STD: Standard - HD: Heavy Duty

Technologies

Special Compound

Extra Deep Tread

Performance

Traction

High Load Capacity

Self-Cleaning

Durability

TRACTOR

TR 171 (R-1 W+)

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.30
∅ 32"	**12.4 - 32**	W 11	W 9 ; W 10	315	1370	643	4232	STD	8	TT	124 A6		30	1600
∅ 34"	**16.9 - 34**	W 15 L	W 14 L	429	1585	736	4838	STD	8	TT	139 A6		km/h - bar	1.70
													30	2430
	18.4 - 34	W 16 L	W 15 L	470	1655	768	4866	STD	10	TT	146 A6		km/h - bar	1.80
													30	3000
∅ 36"	**12.4 - 36**	W 11	W 9 ; W 10	315	1470	691	4332	STD	8	TT	126 A6		km/h - bar	2.30
													30	1700
	13.6 - 36	W 12	W 11	345	1520	717	4647	STD	8	TT	129 A6		km/h - bar	2.00
													30	1850
∅ 38"	**13.6 - 38**	W 12	W 11	345	1585	738	4785	STD	8	TT	131 A6		km/h - bar	2.00
													30	1950
	16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	STD	8	TT	141 A6		km/h - bar	1.70
													30	2575
	18.4 - 38	W 16 L	W 15 L	470	1760	815	5364	STD	10	TT	148 A6		km/h - bar	1.80
													30	3150

STD: Standard - HD: Heavy Duty

Technologies

- Special Compound
- Extra Deep Tread

Performance

- Traction
- High Load Capacity
- Self-Cleaning
- Durability



TRACTOR

Bias



TR 173

TR 173 is a tractor tire suitable for wet conditions and paddy fields. The special tread pattern provides outstanding self-cleaning properties in addition to reduced soil compaction thanks to a large contact area.

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	1.70
∅ 24"	12.4 - 24	W 11	W 9 ; W 10	315	1160	541	3509	STD	6	TT	115 A6		30	1215
													km/h - bar	1.60
∅ 26"	13.6 - 26	W 12	W 11	340	1255	586	3786	STD	6	TT	120 A6		30	1400

STD: Standard

Performance

Self-Cleaning

Reduced Soil Compaction



Bias



FARM 2000 (R-1)

The FARM 2000 tire is suitable on tractors for soil tillage and transport applications. It is the ideal tire for heavy-duty use and in all operating conditions where good traction is required.

∅ 15.3"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.60
	260/70 - 15.3	9.00	-	265	775	349	2294	STD	-	TL	114 A8	126 A8		10 FR	2380
														25 FR	2025
														30 FR	1905
														40 FR	1700
														10 DW	1650
														25 DW	1405
														30 DW	1320
														40 DW	1180
	300/80 - 15.3	9.00	-	300	890	388	2608	STD	-	TL	120 A8	132 A8		km/h - bar	2.80
														10 FR	2800
														25 FR	2380
														30 FR	2240
														40 FR	2000
														10 DW	1960
														25 DW	1665
														30 DW	1570
														40 DW	1400
∅ 16"	250/80 - 16	W 8	W 7 ; W 9 ; W 8 L	240	820	369	2429	STD	-	TT	113 A8	125 A8		km/h - bar	2.80
														10 FR	2310
														25 FR	1965
														30 FR	1850
														40 FR	1650
														10 DW	1610
														25 DW	1370
														30 DW	1290
														40 DW	1150
	250/80 - 16	W 8	W 7 ; W 9 ; W 8 L	240	820	369	2429	STD	-	TL	113 A8	125 A8		km/h - bar	2.80
														10 FR	2310
														25 FR	1965
														30 FR	1850
														40 FR	1650
														10 DW	1610
														25 DW	1370
														30 DW	1290
														40 DW	1150
∅ 18"	8 - 18	W 6	-	195	840	390	2470	STD	4	TT	-	85 A6		km/h - bar	1.25
														30	515
	8 - 18	W 6	-	195	840	390	2470	STD	6	TT	-	94 A6		km/h - bar	1.90
														30	670

STD: Standard

Technologies

Reinforced Carcass

Special Compound

Performance

Durability

Traction

Cut and Chip Resistance

Self-Cleaning

High Load Capacity

FARM 2000 (R-1)

∅ 18"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	2.80
	250/80 - 18	W 8	W7 ; W9	240	870	394	2679	STD	-	TT	115 A8	127 A8		10 FR	2450
														25 FR	2085
														30 FR	1960
														40 FR	1750
														10 DW	1700
														25 DW	1445
														30 DW	1360
														40 DW	1215
	250/80 - 18	W 8	W7 ; W9	240	870	394	2679	STD	-	TL	115 A8	127 A8		km/h - bar	2.80
														10 FR	2450
														25 FR	2085
														30 FR	1960
														40 FR	1750
														10 DW	1700
														25 DW	1445
														30 DW	1360
														40 DW	1215
∅ 20"	8.3 - 20	W 7	-	210	895	431	2714	STD	4	TT	-	88 A6		km/h - bar	1.60
														30	560
	8.3 - 20	W 7	-	210	895	431	2714	STD	6	TT	-	96 A6		km/h - bar	2.40
														30	710
∅ 24"	8.3 - 24	W 7	W 6	211	995	473	3032	STD	6	TT	-	100 A6		km/h - bar	2.40
														30	810
	8.3 - 24	W 7	W 6	211	995	473	3032	STD	8	TT	-	105 A6		km/h - bar	3.10
														30	935
∅ 28"	12.4 - 28	W 11	W 9 ; W 10	320	1288	603	3969	STD	8	TT	123 A6			km/h - bar	2.30
														30	1550
	12.4 - 28	W 11	W 9 ; W 10	320	1288	603	3969	STD	10	TT	124 A6			km/h - bar	2.40
														30	1600
	12.4 - 28	W 11	W 9 ; W 10	320	1288	603	3969	STD	12	TT	125 A6			km/h - bar	2.50
														30	1650
	13.6 - 28	W 12	W 11	345	1335	622	4080	STD	6	TT	121 A6			km/h - bar	-
														-	-

STD: Standard

Technologies

Reinforced Carcass

Special Compound

Performance

Durability

Traction

Cut and Chip Resistance

Self-Cleaning

High Load Capacity

FARM 2000 (R-1)

∅ 28" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 2.00
13.6 - 28	W 12	W 11	345	1335	622	4080	STD	8	TT	125 A6		30	1650
												km/h - bar	2.2
13.6 - 28	W 12	W 11	345	1335	622	4080	STD	10	TT	127 A6		30	1750
												km/h - bar	2.30
13.6 - 28	W 12	W 11	345	1335	622	4080	STD	12	TT	128 A6		30	1800
												km/h - bar	-
13.6 - 28	W 12	W 11	345	1335	622	4080	SPL	12	TT	128 A6		-	-
												km/h - bar	1.80
14.9 - 28	W 13	W 11 ; W 12	385	1375	636	4194	STD	8	TT	130 A6		30	1900
												km/h - bar	2.10
14.9 - 28	W 13	W 11 ; W 12	385	1375	636	4194	STD	10	TT	132 A6		30	2120
												km/h - bar	2.30
14.9 - 28	W 13	W 11 ; W 12	385	1375	636	4194	STD	12	TT	134 A6		30	2120
												km/h - bar	2.50
14.9 - 28	W 13	W 11 ; W 12	385	1375	636	4194	STD	14	TT	136 A6		30	2240
												km/h - bar	1.70
16.9 - 28	W 15 L	W 14 L	429	1420	657	4351	HD	8	TT	135 A6		30	2180
												km/h - bar	2.40
16.9 - 28	W 15 L	W 14 L	429	1420	657	4351	STD	12	TT	143 A6		30	2725
∅ 30" **18.4 - 30**	W 16 L	-	470	1560	716	4776	STD	14	TT	151 A6		km/h - bar	2.6
												30	3450

STD: Standard - SPL: Special - HD: Heavy Duty

Technologies

Reinforced Carcass

Special Compound

Performance

Durability

Traction

Cut and Chip Resistance

Self-Cleaning

High Load Capacity

TRACTOR

Bias



FARM 2000 PLUS (R-1)

FARM 2000 PLUS is an agriculture tire featuring a sturdy lug design for better performance in field and road operations. The deep tread provides an extended tire life, whereas the superior tread compound ensures better wear and tear resistance. FARM 2000 PLUS shows excellent self-cleaning features and specially designed lug angles making the tire particularly suitable for field and haulage applications.

∅ 28"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.40
	16.9 - 28	W 15 L	W 14 L	440	1435	657	4311	STD	12	TT	143 A6		30	2725
	16.9 - 28	W 15 L	W 14 L	440	1435	657	4311	SPL	12	TT	143 A6		30	2725

STD: Standard - SPL: Special

Technologies

More Lugs

Performance

Durability

Traction

Cut and Chip Resistance

Self-Cleaning

High Load Capacity



Bias



FARM SPECIAL (R-1)

FARM SPECIAL is a tractor tire suitable for both field and road operations. The strong nylon casing provides a high level of puncture resistance and a longer service life, whilst the rounded shoulders prevent soil damages ensuring the protection of the valuable crops. FARM SPECIAL features a unique tread design with special mud breakers for best self-cleaning properties. In addition, dual angled lugs provide excellent traction and reduced slippage.

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 2.80
∅ 24"	9.5 - 24	W 8	W 7	240	1050	491	3194	STD	8	TT	112 A6		30	1120
	11.2 - 24	W 10	W 9	285	1095	509	3283	STD	8	TT	116 A6		km/h - bar / 30	2.40 / 1250
	12.4 - 24	W 11	W 9 ; W 10	320	1155	534	3504	STD	8	TT	121 A6		km/h - bar / 30	2.30 / 1450
	13.6 - 24	W 12	W 11	350	1205	554	3635	STD	8	TT	123 A6		km/h - bar / 30	2.00 / 1550
	14.9 - 24	W 13	W 11 ; W 12	378	1255	572	3775	STD	8	TT	128 A6		km/h - bar / 30	1.80 / 1800
∅ 28"	11.2 - 28	W 10	W 9	285	1205	563	3694	STD	8	TT	118 A6		km/h - bar / 30	2.40 / 1320
	12.4 - 28	W 11	W 9 ; W 10	315	1265	589	3853	STD	8	TT	123 A6		km/h - bar / 30	2.30 / 1550
	13.6 - 28	W 12	W 11	350	1310	610	3985	STD	8	TT	125 A6		km/h - bar / 30	2.00 / 1650
	14.9 - 28	W 13	W 11 ; W 12	375	1355	620	4105	STD	8	TT	130 A6		km/h - bar / 30	1.80 / 1900
∅ 30"	16.9 - 30	W 15 L	W 14 L	431	1469	671	4456	STD	8	TT	137 A6		km/h - bar / 30	1.70 / 2300

STD: Standard

Technologies

Reinforced Carcass

Performance

Self-Cleaning

Traction

High Load Capacity

Cut and Chip Resistance

Durability

TRACTOR

FARM SPECIAL (R-1)

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 1.40
∅ 30"	**18.4 - 30**	W 16 L	W 15 L	451	1533	689	4599	STD	8	TT	139 A6		30	2430
∅ 32"	**12.4 - 32**	W 11	W 9 ; W 10	320	1360	634	4137	STD	8	TT	124 A6		km/h - bar	2.30
													30	1600
∅ 36"	**13.6 - 36**	W 12	W 11	345	1515	704	4591	STD	8	TT	129 A6		km/h - bar	2.00
													30	1850
∅ 38"	**13.6 - 38**	W 12	W 11	345	1565	736	4874	STD	8	TT	131 A6		km/h - bar	2.00
													30	1950
	14.00 - 38	W 12	W 11	345	1565	736	4874	STD	8	TT	131 A6		km/h - bar	2.00
													30	1950
	15.5 - 38	W 14 L	-	394	1575	731	4813	STD	8	TT	133 A6		km/h - bar	1.80
													30	2060

STD: Standard

Technologies

- Reinforced Carcass
- **Performance**
- Self-Cleaning
- Traction
- High Load Capacity
- Cut and Chip Resistance
- Durability



Bias



AS 2001 (R-1)

AS 2001 is a bias cross-ply tire which best suits tractors in farming and haulage operations. The particularly strong casing provides very high durability and makes the AS 2001 tire ideal for heavy-duty operations.

∅ 26"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 1.80
	18.4 - 26	W 16 L	W 15 L	467	1475	650	4250	STD	10	TT	142 A6		30	2650
	18.4 - 26	W 16 L	W 15 L	467	1475	650	4250	STD	10	TL	142 A6		km/h - bar 30	1.80 2650
	18.4 - 26	W 16 L	W 15 L	467	1475	650	4250	STD	12	TT	146 A6		km/h - bar 30	2.30 3000
	18.4 - 26	W 16 L	W 15 L	467	1475	650	4250	STD	12	TL	146 A6		km/h - bar 30	2.30 3000
	18.4 - 26	W 16 L	W 15 L	467	1475	650	4250	STD	14	TT	149 A6		km/h - bar 30	2.60 3250
∅ 28"	**16.9 - 28**	W 15 L	W 14 L	429	1420	651	4319	STD	8	TT	135 A6		km/h - bar 30	1.70 2180
	16.9 - 28	W 15 L	W 14 L	429	1420	651	4319	STD	10	TT	139 A6		km/h - bar 30	2.00 2430
	16.9 - 28	W 15 L	W 14 L	429	1420	651	4319	STD	12	TT	143 A6		km/h - bar 30	2.40 2725
	16.9 - 28	W 15 L	W 14 L	429	1420	651	4319	STD	12	TL	143 A6		km/h - bar 30	2.40 2725
	16.9 - 28	W 15 L	W 14 L	429	1420	651	4319	SPL	12	TT	143 A6		km/h - bar 30	2.40 2725

STD: Standard - SPL: Special

Technologies

Special Compound

Performance

Traction

High Load Capacity

Self-Cleaning

Cut and Chip Resistance

Bias



TRAC FARM (R-1)

TRAC FARM is a heavy-duty tire specifically designed for tractors and soil tillage applications. Its strong casing and the deep tread make the tire suitable for the most difficult operating conditions, ensuring the best return on investment during the entire product life-cycle.

∅	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.40
∅ 20"	**11.2 - 20**	W 10	W 9	290	1000	463	2940	STD	8	TT	111 A6		30	1090
∅ 28"	**12.4 - 28**	W 11	W 9 ; W 10	320	1295	602	3890	STD	10	TT	124 A6		30	1600
	12.4 - 28	W 11	W 9 ; W 10	320	1295	602	3890	STD	12	TT	125 A6		30	1650
	13.6 - 28	W 12	W 11	365	1345	625	4089	STD	12	TT	128 A6		30	1800
	16.9 - 28	W 15 L	W 14 L	440	1435	663	4219	STD	12	TT	143 A6		30	2725
∅ 30"	**18.4 - 30**	W 16 L	W 15 L	467	1550	716	4557	STD	12	TT	149 A6		30	3250
	18.4 - 30	W 16 L	-	470	1565	-	-	STD	14	TT	151 A6		30	3450
	18.4 - 30	W 16 L	-	470	1565	-	-	HD	14	TT	151 A6		30	3450

∅	Load capacity (kg/tire) km/h - bar	2.40	2.50	2.30	2.6
∅ 20"	30	1090			
∅ 28"	30	1600	1650	1800	
∅ 30"	30			3250	3450

STD: Standard - HD: Heavy Duty

Technologies

Special Compound

Performance

Traction

High Load Capacity

Self-Cleaning

Cut and Chip Resistance

TRACTOR

Bias



TRAC FARM PLUS (R-1)


TRAC FARM PLUS is a rear tractor tire specifically designed for farming applications. The tire features a deeper tread with dual angle lugs and extra rubber at the center to ensure both excellent traction and a comfortable ride on the road. The special tread design provides more contact for better stability whereas the strong casing offers excellent resistance against stub penetration. TRAC FARM PLUS is made of a superior tread compound optimizing wear and tear resistance and ensuring a longer tire life-cycle.

∅ 28"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	Load capacity (kg/tire) km/h - bar	2.50
	12.4 - 28	W 11	W 9 ; W 10	320	1295	603	3899	STD	12	TT	125 A6	30	1650
	13.6 - 28	W 12	W 11	365	1345	621	4088	STD	12	TT	128 A6	km/h - bar	2.30
												30	1800
	14.9 - 28	W 13	W 12 ; W 11	390	1380	642	4179	STD	12	TT	137 A6	km/h - bar	2.6
												30	2300
	16.9 - 28	W 15 L	W 14 L	440	1435	660	4298	STD	12	TT	143 A6	km/h - bar	2.40
												30	2725
∅ 30"	**16.9 - 30**	W 15 L	W 14 L	440	1475	679	4466	STD	12	TT	144 A6	km/h - bar	2.40
												30	2800

STD: Standard

Technologies

- Larger Footprint
- Performance
- Handling & Comfort
- Durability
- Self-Cleaning
- Traction
- High Load Capacity

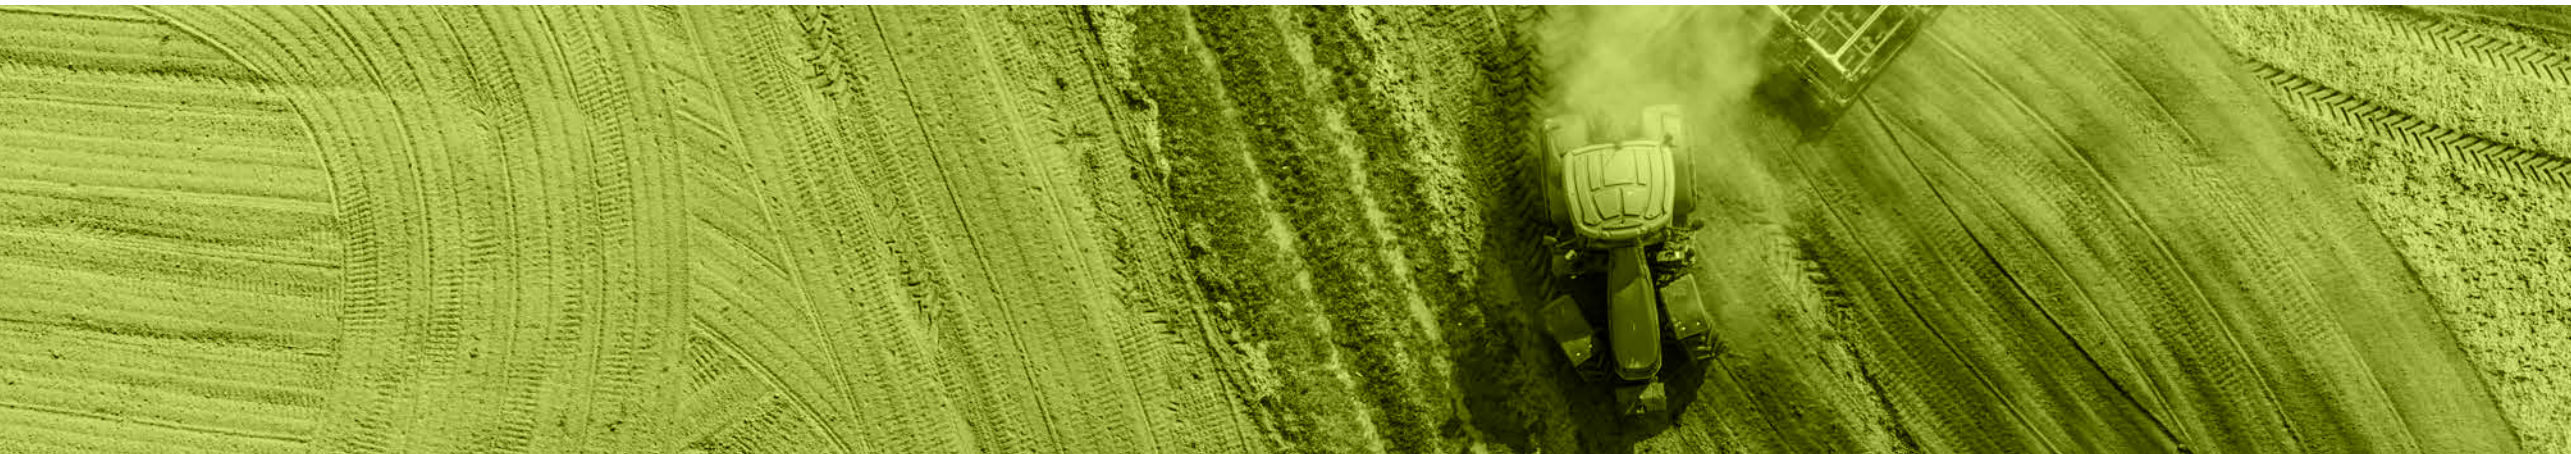

Bias



COMMANDER (R) (R-1)

COMMANDER (R) is an agricultural tire featuring a deep tread with strong lug bases for a longer tire life-cycle. The special dual-angle lug design provides both excellent traction in the field and comfortable ride on the road. The flat tread profile along with the larger contact area results in extraordinary stability. The strong casing is made of a cut-and-chip-resistant compound providing better puncture resistance.

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 3.0
∅ 20"	9.5 - 20	W 8	W 7	245	970	455	2953	STD	12	TT	109 A6		30	1030
∅ 24"	9.5 - 24	W 8	W 7	245	1065	507	3308	STD	12	TT	114 A6		30	1150
	11.2 - 24	W 10	W 9	295	1125	535	3460	STD	12	TT	123 A6		30	1550
	12.4 - 24	W 11	W 10	320	1185	559	3644	STD	8	TT	121 A6		30	1450
	12.4 - 24	W 11	W 10	320	1185	559	3644	STD	12	TT	128 A6		30	1800
∅ 28"	12.4 - 28	W 11	W 9 ; W 10	318	1285	600	3946	STD	12	TT	125 A6		30	1650
	13.6 - 28	W 12	W 11	355	1335	623	4068	STD	12	TT	128 A6		30	1800
	14.9 - 28	W 13	W 11 , W 12	388	1380	645	4213	STD	12	TT	134 A6		30	2120
	16.9 - 28	W 15 L	W 14 L	435	1435	663	4274	STD	12	TT	143 A6		30	2725
∅ 30"	18.4 - 30	W 16 L	-	472	1565	734	4834	STD	8	TT	139 A6		30	2430

Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 3.0
30	1030
km/h - bar	3.0
30	1150
km/h - bar	3.6
30	1550
km/h - bar	2.30
30	1450
km/h - bar	3.5
30	1800
km/h - bar	2.50
30	1650
km/h - bar	2.30
30	1800
km/h - bar	2.30
30	2120
km/h - bar	2.40
30	2725
km/h - bar	1.4
30	2430

Technologies

Extra Deep Tread

Performance

Durability

Traction

Cut and Chip Resistance

Self-Cleaning

High Load Capacity

STD: Standard

TRACTOR

COMMANDER (R) (R-1)

∅ 30”	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.60
	18.4 - 30	W 16 L	-	472	1565	734	4834	STD	14	TT	151 A6		30	3450
	18.4 - 30	W 16 L	-	472	1565	734	4834	STD	18	TT	155 A6		km/h - bar	3.2
													30	3875
	18.4 - 30	W 16 L	-	472	1565	734	4834	STD	18	TL	155 A6		km/h - bar	3.2
													30	3875

STD: Standard

Technologies

Extra Deep Tread

Performance

Durability

Traction

Cut and Chip Resistance

Self-Cleaning

High Load Capacity



Bias



TR 270 (R-2)

TR 270 is a tractor tire suitable for soil tillage applications. It is specially designed for providing maximum performance on wet and moist soil. In these soil conditions, a tire is required to offer superior grip and enhanced self-cleaning features. TR 270 perfectly meets all these characteristics.

∅	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	1.10
∅ 26"	23.1 - 26	DW 20 A ; DW 20 B	-	590	1646	739	4922	STD	8	TT	145 A6		30	2900
	23.1 - 26	DW 20 A ; DW 20 B	-	590	1646	739	4922	STD	10	TT	149 A6		km/h - bar	1.40
													30	3250
	23.1 - 26	DW 20 A ; DW 20 B	-	590	1646	739	4922	STD	12	TT	153 A6		km/h - bar	1.70
													30	3650
	23.1 - 26	DW 20 A ; DW 20 B	-	590	1646	739	4922	STD	14	TT	156 A6		km/h - bar	2.00
													30	4000
∅ 30"	18.4 - 30	DW 16 L ; DW 16 A	W 15 L ; DW 15 A	465	1580	720	4787	STD	8	TT	139 A6		km/h - bar	1.40
													30	2430
	18.4 - 30	DW 16 L ; DW 16 A	W 15 L ; DW 15 A	465	1580	720	4787	STD	8	TL	139 A6		km/h - bar	1.40
													30	2430
	18.4 - 30	DW 16 L ; DW 16 A	W 15 L ; DW 15 A	465	1580	720	4787	STD	12	TT	149 A6		km/h - bar	2.30
													30	3250
	23.1 - 30	DW 20 A ; DW 20 B		590	1748	790	5227	STD	8	TT	146 A6		km/h - bar	1.10
													30	3000
	23.1 - 30	DW 20 A ; DW 20 B	-	590	1748	790	5227	STD	10	TT	151 A6		km/h - bar	1.40
													30	3450

STD: Standard

Technologies

Extra Deep Tread

Performance

Traction

For Muddy Ground

Self-Cleaning

Durability

Cut and Chip Resistance

TR 270 (R-2)

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 1.70
∅ 30"	23.1 - 30	DW 20 A ; DW 20 B	-	590	1748	790	5227	STD	12	TT	155 A6		30	3875
∅ 34"	18.4 - 34	DW 16 A ; W 16 L	W 15 L	465	1682	771	5029	STD	8	TT	142 A6		30	2650
	18.4 - 34	DW 16 A ; W 16 L	W 15 L	465	1682	771	5029	STD	12	TT	150 A6		30	3350
	23.1 - 34	DW 20 A ; DW 20 B	-	590	1850	841	5532	STD	8	TT	148 A6		30	3150
	23.1 - 34	DW 20 A ; DW 20 B	-	590	1850	841	5532	STD	10	TT	153 A6		30	3650
	23.1 - 34	DW 20 A ; DW 20 B	-	590	1850	841	5532	STD	12	TT	156 A6		30	4000
	23.1 - 34	DW 20 A ; DW 20 B	-	590	1850	841	5532	STD	14	TT	160 A6		30	4500
∅ 38"	13.6 - 38	W12	DW 12 A ; W 11	345	1600	-	-	STD	6	TT	122 A6		30	1500
	18.4 - 38	W 16 A ; W 16 L	W 15 L ; DD 16	465	1784	822	5334	STD	8	TT	143 A6		30	2725
	18.4 - 38	W 16 A ; W 16 L	W 15 L ; DD 16	465	1784	822	5334	STD	12	TT	153 A6		30	3650
	20.8 - 38	W 18 A ; W 18 L	DD 18 ; DW 18 A	530	1875	841	5472	STD	8	TT	148 A6		30	3150
	20.8 - 38	W 18 A ; W 18 L	DD 18 ; DW 18 A	530	1875	841	5472	STD	10	TT	151 A6		30	3450

STD: Standard

Technologies

Extra Deep Tread

Performance

Traction

For Muddy Ground

Self-Cleaning

Durability

Cut and Chip Resistance

TRACTOR

TR 270 (R-2)

∅ 38"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar 30	Load capacity (kg/tire) 2.00
	20.8 - 38	W 18 A ; W 18 L	DD 18 ; DW 18 A	530	1875	841	5472	STD	12	TT	156 A6		30	4000

∅ 46"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 1.50
	13.6 - 46	W 12	W 12 A	345	1804	-	-	STD	6	TT	125 A6		30	1650

STD: Standard

Technologies

Extra Deep Tread

Performance

Traction

For Muddy Ground

Self-Cleaning

Durability

Cut and Chip Resistance



Bias



TR 273 (R-2)

TR 273 is a tractor tire suitable for soil tillage and specifically designed to provide maximum performance on wet and moist soil. In these soil conditions, a tire is required to offer superior grip and enhanced self-cleaning properties. TR 273 perfectly meets all these characteristics.

∅ 24"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	Load capacity (kg/tire) km/h - bar	2.30
	12.4 - 24	W 11	W 10	315	1195	550	3722	STD	8	TT	121 A6	30	1450
	13.6 - 24	W 12	W 11	350	1240	570	3795	STD	8	TT	123 A6	km/h - bar	2.0
												30	1550
	14.9 - 24	W 13	W 12	380	1310	595	4044	STD	8	TT	128 A6	km/h - bar	1.80
												30	1800
	14.9 - 24	W 13	W 12	380	1310	595	4044	STD	10	TT	132 A6	km/h - bar	2.3
												30	2000
∅ 26"	**18.4 - 26**	W 16	W 15	470	1490	673	4534	STD	12	TT	146 A6	km/h - bar	2.30
												30	3000
	23.1 - 26	DW 20 A ; DW 20 B	-	590	1655	757	4998	STD	10	TT	149 A6	km/h - bar	1.40
												30	3250
	23.1 - 26	DW 20 A ; DW 20 B	-	590	1655	757	4998	STD	12	TT	153 A6	km/h - bar	1.70
												30	3650
	23.1 - 26	DW 20 A ; DW 20 B	-	590	1655	757	4998	STD	14	TT	156 A6	km/h - bar	2.00
												30	4000
∅ 28"	**14.9 - 28**	W 13	W 12	380	1410	652	4405	STD	8	TT	130 A6	km/h - bar	1.80
												30	1900
∅ 30"	**16.9 - 30**	W 15	W 14	435	1530	705	4716	STD	12	TT	143 A6	km/h - bar	2.40
												30	2725

STD: Standard

Technologies

Extra Deep Tread

Performance

Traction

For Muddy Ground

Self-Cleaning

Durability

Cut and Chip Resistance

TRACTOR

TR 273 (R-2)

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 2.30
∅ 30"	**18.4 - 30**	W 16 L	W 15 L	465	1585	723	4924	STD	12	TT	149 A6		30	3250
	23.1 - 30	DW 20 A ; DW 20 B	-	590	1748	794	5356	STD	10	TT	151 A6		km/h - bar 30	1.40 3450
	23.1 - 30	DW 20 A ; DW 20 B	-	590	1748	794	5356	STD	14	TT	157 A6		km/h - bar 30	1.90 4125
∅ 34"	**18.4 - 34**	DW 16A	W 16 L ; W 15 L ; DW 15 L	475	1701	775	5253	STD	12	TT	150 A6		km/h - bar 30	2.20 3350
	23.1 - 34	DW 20 A ; DW 20 B	-	590	1850	833	5634	STD	10	TT	153 A6		km/h - bar 30	1.40 3650
	23.1 - 34	DW 20 A ; DW 20 B	-	590	1850	833	5634	STD	14	TT	160 A6		km/h - bar 30	2.00 4500
∅ 38"	**18.4 - 38**	W 16	W 15	465	1800	822	5579	STD	12	TT	152 A6		km/h - bar 30	2.30 3550

STD: Standard

Technologies

Extra Deep Tread

Performance

Traction

For Muddy Ground

Self-Cleaning


Durability

Cut and Chip Resistance



TRACTOR

Bias



PUDDLE SPECIAL (A)

PUDDLE SPECIAL is a R-2 agricultural tire specifically designed for operations in paddy fields. The extra deep tread design along with the special lug pattern provides best grip and excellent traction even on wet and soft soil. The wide center bar provides better adaptability for road applications and provides extraordinary service performance. In addition, PUDDLE SPECIAL shows superior self-cleaning features and excellent durability.

∅ 28"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	3.50
	12.4 - 28	W 11	W 10	325	1385	649	4067	STD	12	TT	137 A2		10	2300

∅ 32"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	1.60
	11 - 32	W 10	W 9	305	1465	702	4384	STD	6	TT	111 A2		10	1090
	11 - 32	W 10	W 9	305	1465	702	4384	STD	6	TL	111 A2		km/h - bar 10	1.60 1080

STD: Standard

Performance

Traction

Self-Cleaning

Durability

TRACTOR

Bias



PUDDLE SPECIAL (B)

PUDDLE SPECIAL is a R-2 agricultural tire specifically designed for operations in paddy fields. The extra deep tread design along with the special lug pattern provides best grip and excellent traction even on wet and soft soil. The wide center bar provides better adaptability for road applications and provides extraordinary service performance. In addition, PUDDLE SPECIAL shows superior self-cleaning features and excellent durability.

∅ 26"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	3.00
	120/90 - 26	4 JA	-	125	940	-	-	STD	6	TT	90 A2		10	600
	120/90 - 26	4 JA	-	125	940	-	-	STD	6	TL	90 A2		km/h - bar 10	3.00 600

STD: Standard

Performance

Traction

Self-Cleaning

Durability

TRACTOR

Bias



TR 393

TR 393 has been specially designed for hay balers, spreaders and implement machinery on and off the road. The special tread design provides best flotation and self-cleaning properties in addition to a long service life. Thanks to its large contact area, TR 393 ensures excellent traction and minimizes soil compaction.

∅ 16”	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 1.60
	16.5L-16.1SL	W 14 C	W 14 CH	420	1025	461	2966	STD	6	TL	128 A8		40	1800

STD: Standard

Performance

Excellent Flotation

Self-Cleaning

Traction

Reduced Soil Compaction



Bias



TR 459 (R-4)

TR 459 has been particularly designed for digging and loading operations as well as municipality and maintenance applications with tractors and backhoe loaders. It offers high stability and is available in two versions. The "aramid-belted" version features high puncture resistance and is cut-and-chip-resistant, whilst the "special" version provides an extended tire life-cycle.

Performance

Stability

Traction

∅ 20"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	4.00
	400/70 - 20	13	12 SDC ; 13 SDC; 14	410	1090	-	-	STD	-	TL	149 A8		40	3250

∅ 24"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.10
	14.9 - 24	DW 13	DW 12 ; DW 11 ; DW 13 L	390	1244	562	3657	IND	8	TL	137 A8		40	2300
	14.9 - 24	DW 13	DW 12 ; DW 11 ; DW 13 L	390	1244	562	3657	IND	12	TL	145 A8		km/h - bar	2.90
													40	2900
	16.9 - 24	DW 15 L	DW 14 L	440	1310	590	3850	IND	8	TL	142 A8		km/h - bar	1.90
													40	2650
	16.9 - 24	DW 15 L	DW 14 L	440	1310	590	3850	IND	10	TL	145 A8		km/h - bar	2.20
													40	2900
	16.9 - 24	DW 15 L	DW 14 L	440	1310	590	3850	IND	12	TL	149 A8		km/h - bar	2.60
													40	3250
	17.5L - 24	DW 15 L	DW 14 L	445	1270	557	3825	IND	8	TL	139 A8		km/h - bar	1.70
													40	2430
	17.5L - 24	DW 15 L	DW 14 L	445	1270	557	3825	IND	10	TL	144 A8		km/h - bar	2.20
													40	2800
	17.5L - 24	DW 15 L	DW 14 L	445	1270	557	3825	IND	12	TL	148 A8		km/h - bar	2.70
													40	3150
	18.4 - 24	DW 16 L	DW 15 L	472	1375	610	4114	IND	12	TL	155 A8		km/h - bar	2.50
													40	3875

STD: Standard - IND: Industrial

TR 459 (R-4)

∅ 24"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	1.90
	19.5L - 24	DW 16 L	-	490	1333	585	4031	IND	10	TL	147 A8		40	3075
													km/h - bar	2.30
	19.5L - 24	DW 16 L	-	490	1333	585	4031	IND	12	TL	151 A8		40	3450
													km/h - bar	2.30
	19.5L - 24	DW 16 L	-	490	1333	585	4031	IND SPL	12	TL	151 A8		40	3450
													km/h - bar	2.20
	21L - 24	DW 18 L	-	533	1378	605	3995	IND	12	TL	155 A8		40	3875
													km/h - bar	2.50
	21L - 24	DW 18 L	-	533	1378	605	3995	STD	14	TL	157 A8		40	4125
∅ 26"	**18.4 - 26**	DW 16 L	DW 15 L	472	1425	628	4346	IND	12	TL	156 A8		km/h - bar 40	2.50 4000
													km/h - bar	2.90
	18.4 - 26	DW 16 L	DW 15 L	472	1425	628	4346	IND	14	TL	159 A8		40	4375
∅ 28"	**16.9 - 28**	DW 15 L	DW 14 L	440	1410	640	4145	IND	8	TL	145 A8		km/h - bar 40	1.90 2900
													km/h - bar	2.20
	16.9 - 28	DW 15 L	DW 14 L	440	1410	640	4145	IND	10	TL	148 A8		40	3150
													km/h - bar	2.60
	16.9 - 28	DW 15 L	DW 14 L	440	1410	640	4145	IND	12	TL	152 A8		40	3550
													km/h - bar	2.50
	18.4 - 28	DW 16 L	DW 15 L	472	1475	653	4337	IND	12	TL	157 A8		40	4125
													km/h - bar	2.20
	21L - 28	DW 18 A	-	535	1480	-	-	IND	12	TL	157 A8		40	4125

Performance

Stability

Traction

STD: Standard - IND: Industrial - IND SPL - Industrial Special

TRACTOR

TR 459 (R-4)

∅ 30”	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 2.70
	16.9 - 30	DW 15 L	DW 14 L	440	1470	657	4484	IND	12	TL	153 A8		40	3650

IND: Industrial

Performance

Stability

Traction



TRACTOR

Bias



TR 461 (R-4)

TR 461 is a BKT pattern suitable for municipality and maintenance applications with tractors as well as for loading operations with telehandlers. The sidewall protection features particular resistance against cuts and bruises providing a longer life even on hard surfaces in addition to excellent stability.

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	3.70
∅ 18"	12.5/80 - 18	W 9	11	305	987	435	2902	STD	12	TL	-		10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
													10 DW	2590
													25 DW	2200
													30 DW	2070
													40 DW	1850
∅ 24"	16.9 - 24	DW 15 L	DW 14 L	440	1280	566	3763	STD	14	TL	151 A8		km/h - bar	2.90
													40	3450
	19.5L - 24	DW 16 L	-	490	1310	578	3851	STD	12	TL	151 A8		km/h - bar	2.30
													40	3450
	19.5L - 24	DW 16 L	-	490	1310	578	3851	STD	14	TL	154 A8		km/h - bar	2.60
													40	3750
	21L - 24	DW 18 L	-	540	1385	607	4072	STD	14	TL	157 A8		km/h - bar	2.50
													40	4125
∅ 28"	16.9 - 28	DW 15 L	DW 14 L	440	1390	620	4087	STD	14	TL	154 A8		km/h - bar	2.90
													40	3750

STD: Standard


Performance

Road Oriented

Cut and Chip Resistance

Durability

Stability

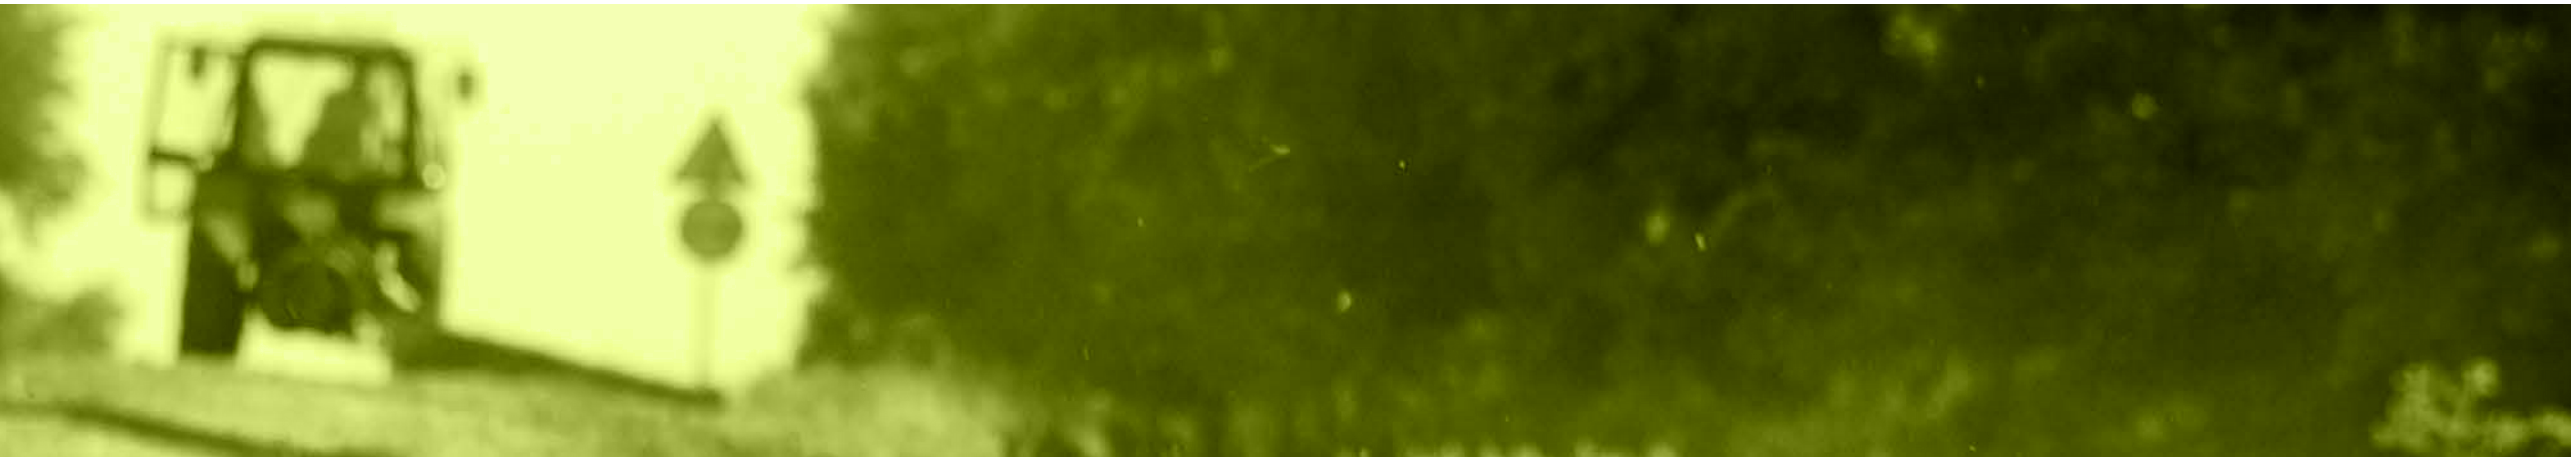

Bias



TR 463 (R-4)

TR 463 has been specially designed for backhoe loaders and industrial tractors. Made of a superior tread compound and featuring a strong nylon casing, this tire stands for best results in industrial and OTR applications, and on construction sites. TR 463 provides excellent traction for drive wheels.

∅ 24"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.60
	16.9 - 24	DW 15 L	DW 14 L	445	1300	584	3877	IND	12	TL	149 A8		**40**	3250

∅ 26"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.50
	18.4 - 26	DW 16 L	DW 15 L	480	1425	637	4215	IND	12	TL	156 A8		**40**	4000

∅ 28"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.60
	16.9 - 28	DW 15 L	DW 14 L	450	1405	636	4190	IND	12	TL	152 A8		**40**	3550

IND: Industrial

Performance

Traction

Bias



TR 318

TR 318 is specifically designed for sprayers. Its dual-angled lugs provide excellent traction and outstanding driving comfort. TR 318 also features extraordinary self-cleaning properties. The strong casing stands for best durability.

∅ 12"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	3.0
	23 X 9.00 - 12	7.0	-	220	585	-	-	STD	6	TT	93 A3		**15**	650
	26 X 10.00 - 12	8.5	-	265	675	-	-	STD	8	TT	107 A3		km/h - bar **15**	3.70 975

STD: Standard

Performance

Traction

Stability

Self-Cleaning

TRACTOR

Radial



TRAC SUPER

TRAC SUPER is the first radial tire introduced in BKT's municipality segment. The tire structure ensures an excellent smooth drive combined with best traction performance. As a result, it is particularly suitable for applications on large lawn surfaces such as parks and roadsides.

∅ 17"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version		Load capacity (kg/tire)									
												km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6
	440/50 R 17	135 D	14.00	13.00	441	872	395	2674	-	STD		65	955	960	1070	1265	1440	1635	1855	1985	2180
												40	1300	1305	1455	1720	1960	2225	2525	2700	2965
												30	1440	1450	1615	1915	2175	2475	2805	3000	3295
												10	1720	1730	1925	2280	2595	2945	3340	3575	3925

STD: Standard

Technology

Steel Belted

Performance

Stability

Traction

TRACTOR

Bias



AT 316

AT 316 is suitable for compact utility tractors in municipality and maintenance applications. The special tread design provides excellent traction without compromising field protection - an essential feature for this kind of application. AT 316 is also available as "aramid-belted" version to provide increased puncture resistance.

∅ 12"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire)	
													km/h - bar	1.40
	24 X 12.00 - 12	10.50 I - 55; I - 70 ; I - 90	-	315	610	271	1769	STD	4	TL	-		15	775
													km/h - bar	2.20
	24 X 12.00 - 12	10.50 I - 55; I - 70 ; I - 90	-	315	610	271	1769	AB	6	TL	-		15	1030

STD: Standard - AB: Aramid Belted

Performance

Traction

Self-Cleaning

Bias



SNOW - RIDE (A)

SNOW-RIDE is particularly suitable for road applications in winter conditions with skid steers. It features excellent traction and is ideal for ice and snow operations. Its specially designed tread pattern eliminates slippage risks.

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.00
	12.5/70 - 16	10 LB	-	315	850	385	2550	STD	6	TL	-		10	1410
													km/h - bar	3.20
	12.5/70 - 16	10 LB	-	315	850	385	2550	STD	10	TL	-		10	1855
∅ 16.5"													km/h - bar	5.20
	10 - 16.5	8.25	-	270	780	357	2340	STD	10	TL	-		10	2135
													km/h - bar	3.10
	10 - 16.5	8.25	-	270	780	357	2340	STD	6	TL	-		10	1590
													km/h - bar	2.80
	12 - 16.5	9.75	-	305	835	379	2505	STD	6	TL	-		10	1915
													km/h - bar	4.50
	12 - 16.5	9.75	-	305	835	379	2505	STD	10	TL	-		10	2540
∅ 18"													km/h - bar	2.60
	15.5/60 - 18	W 13	-	395	938	425	2814	STD	10	TL	-		10	2400
∅ 20"													km/h - bar	2.40
	17.5/65 - 20	W 14 L	-	445	1095	493	3285	STD	10	TL	-		10	3195

STD: Standard

Technology

Snow Pattern

Performance

Traction

Durability

HARVESTER

Radial

AGRIMAX TERIS



Today's high-power harvesters require tires that are able to support heavy equipment and loads without damaging the crops. BKT is committed to provide you with radial tires at the cutting edge to increase your yield. AGRIMAX TERIS is the right partner for all your combined operations. Excellent traction properties and high load capacity are its essential features providing best performance in all harvesting operations. The special sidewall protection and a reinforced shoulder increase resistance - thus extending the product life-cycle – also in harsh conditions and if there are stubbles in the fields.

∅ 26"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	620/75 R 26 CHO	166 A8/B	DW 20 B	-	625	1590	730	4851	750	STD
	750/65 R 26 CHO	166 A8/B	DW 25 B	DW 23 B	764	1636	713	4908	750	STD
	750/65 R 26 CHO	171 A8/B	DW 25 B	DW 23 B	764	1636	713	4908	750	STD
∅ 28"	710/55 R 28 CHO	164 A8/B	DW 23 B	-	716	1493	713	4908	700	STD
∅ 30"	620/75 R 30 CHO	168 A8/B	DW 20 B	-	625	1692	779	5169	800	STD
∅ 32"	650/75 R 32 CHO	172 A8/B	DW 21 B	DW 20 B ; DW 23 B	655	1789	794	5324	825	STD

Load capacity (kg/tire)

km/h - bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2
50	2440	2810	3445	3765	4135	4505	4880	5300
40	2440	2810	3445	3765	4135	4505	4880	5300
30	2615	3010	3690	4030	4430	4825	5225	5675
15 Cyc.	4025	4635	5685	6210	6825	7435	8050	8745
10 Cyc.	4390	5060	6205	6775	7445	8110	8780	9540

km/h - bar	0.8	1.0	1.4	1.6	2.0	2.4
50	2915	3340	4085	4400	4930	5300
40	2915	3340	4085	4400	4930	5300
30	3125	3580	4370	4715	5280	5675
15 Cyc.	4810	5510	6735	7260	8135	8745
10 Cyc.	5250	6015	7350	7920	8875	9540

km/h - bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2
50	2915	3340	4085	4400	4930	5300	5720	6150
40	2915	3340	4085	4400	4930	5300	5720	6150
30	3125	3580	4370	4715	5280	5675	6125	6585
15 Cyc.	4810	5510	6735	7260	8135	8745	9440	10150
10 Cyc.	5250	6015	7350	7920	8875	9540	10300	11070

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
50	1950	2250	2550	2900	3200	3550	3950	4250	4650	5000
40	1950	2250	2550	2900	3200	3550	3950	4250	4650	5000
30	2090	2410	2730	3105	3425	3800	4230	4550	4980	5350
15 Cyc.	3220	3715	4210	4785	5280	5860	6520	7015	7675	8250
10 Cyc.	3510	4050	4590	5220	5760	6390	7110	7650	8370	9000

km/h - bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2
50	2580	2970	3640	3980	4370	4760	5155	5600
40	2580	2970	3640	3980	4370	4760	5155	5600
30	2760	3180	3900	4260	4680	5100	5520	5995
15 Cyc.	4255	4900	6010	6565	7210	7855	8505	9240
10 Cyc.	4640	5345	6555	7160	7865	8570	9275	10080

km/h - bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2
50	2900	3340	4095	4475	4915	5355	5800	6300
40	2900	3340	4095	4475	4915	5355	5800	6300
30	3105	3575	4385	4790	5265	5735	6210	6745
15 Cyc.	4785	5510	6760	7385	8110	8840	9565	10395
10 Cyc.	5220	6015	7375	8055	8850	9640	10435	11340

STD: Standard

Technologies

Reinforced Shoulder

Special Compound

Reinforced Bead

Performance

Traction

High Load Capacity

High Puncture Resistance

Stability

Handling & Comfort

AGRIMAX TERIS

∅ 32"

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
IF 710/75 R 32 CFO	183 A8/B	DW 25 B	DW 23 B	716	1879	851	5653	875	STD
800/65 R 32 CHO	178 A8/175 B	DW 27 B	DW 25 B ; DH 27 B	818	1853	838	5587	875	STD
900/60 R 32 CHO	181 A8/178 B	DW 27 B	DW 28 B ; DW 30 B	886	1893	840	5736	925	STD
900/60 R 32 CHO	185 A8/182 B	DW 27 B	DW 28 B ; DW 30 B	886	1893	840	5736	925	STD
1050/50 R 32 CHO	184 A8/181 B	36.0 VA	-	1059	1893	840	5685	875	STD

Load capacity (kg/tire)

km/h - bar	0.6	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2
50	3410	4025	4635	5775	6300	6910	7435	8135	8750
40	3410	4025	4635	5775	6300	6910	7435	8135	8750
30	3645	4305	4955	6175	6740	7390	7955	8700	9100
20	3680	4345	5005	6235	6800	7460	8025	8785	9450
10	4330	5110	5885	7330	8000	8775	9440	10330	11110
15 Cyc.	5285	6235	7180	8950	9765	10710	11520	12605	13560
30 Cyc.	4430	5230	6025	7505	8190	8980	9665	10575	11375

km/h - bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2
50	3175	3660	4485	4900	5455	5865	6420	6900
40	3450	3975	4875	5325	5925	6375	6975	7500
30	3695	4255	5220	5700	6340	6825	7465	8025
15 Cyc.	5695	6560	8045	8790	9780	10520	11510	12375
10 Cyc.	6210	7155	8775	9585	10665	11475	12555	13500

km/h - bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2
50	3375	3825	4800	5325	5925	6375	6975	7500
40	3715	4210	5280	5860	6520	7015	7675	8250
30	3975	4505	5655	6270	6980	7510	8215	8830
15 Cyc.	6130	6945	8715	9670	10760	11575	12665	13615
10 Cyc.	6685	7575	9505	10545	11735	12625	13815	14850

km/h - bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2	3.6	4.0
50	3375	3825	4800	5325	5925	6375	6975	7500	7990	8500
40	3715	4210	5280	5860	6520	7015	7675	8250	8695	9250
30	3975	4505	5655	6270	6980	7510	8215	8830	9305	9900
15 Cyc.	6130	6945	8715	9670	10760	11575	12665	13615	14350	15265
10 Cyc.	6685	7575	9505	10545	11735	12625	13815	14850	15655	16650

km/h - bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2
50	3715	4210	5280	5860	6520	7015	7675	8250
40	4050	4590	5760	6390	7110	7650	8370	9000
30	4335	4915	6165	6840	7610	8190	8960	9630
15 Cyc.	6685	7575	9505	10545	11735	12625	13815	14850
10 Cyc.	7290	8265	10370	11505	12800	13770	15070	16200

∅ 34"

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
IF 580/80 R 34 CFO	177 D	DW 20 B ; DW 20 A	DW 21 A ; DW 21 B	586	1792	810	5389	850	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.6
65	2705	3140	3580	4090	4530	4965	5405	5770	6355	6865	7300
50	2705	3140	3580	4090	4530	4965	5405	5770	6355	6865	7300
40	2705	3140	3580	4090	4530	4965	5405	5770	6355	6865	7300
30	2705	3140	3580	4090	4530	4965	5405	5770	6355	6865	7300
30 Cyc.	3515	4080	4655	5315	5890	6455	7025	7500	8260	8925	9490
25	2705	3140	3580	4090	4530	4965	5405	5770	6355	6865	7300
15 Cyc.	4195	4865	5550	6340	7020	7695	8380	8945	9850	10640	11315
10	2705	3140	3580	4090	4530	4965	5405	5770	6355	6865	7300

STD: Standard

Technologies

- Reinforced Shoulder
- Special Compound
- Reinforced Bead

Performance

- Traction
- High Load Capacity
- High Puncture Resistance
- Stability
- Handling & Comfort

HARVESTER

AGRIMAX TERIS

∅ 34”

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
IF 710/75 R 34 CFO	184 A8/B	DW 25 B	-	716	1930	870	5852	-	STD

Load capacity (kg/tire)

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.4	3.2
50	3510	4140	4770	5310	5940	6480	7650	9000
40	3510	4140	4770	5310	5940	6480	7650	9000
30	3650	4305	4960	5520	6180	6740	7955	9630
20	3790	4470	5150	5735	6415	7000	8260	9720
10	4460	5260	6060	6740	7545	8230	9715	11430
15 Cyc	5440	6420	7395	8230	9210	10050	11860	13950
30 Cyc	4560	5380	6200	6900	7720	8425	9945	11700

∅ 42”

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
520/85 R 42	168 D	DW 16 L	DD 18 L	516	1951	890	5851	925	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.8
65	1850	2185	2520	2800	3140	3420	3980	4540	5100	5600	-
50	1945	2295	2650	2940	3295	3590	4175	4765	5355	5880	-
40	2025	2395	2765	3070	3440	3745	4360	4970	5585	6135	-
30	2130	2515	2900	3220	3610	3930	4575	5250	5865	6440	-
25	2195	2590	2990	3320	3720	4055	4715	5380	6045	6640	-
10	2775	3280	3780	4200	4705	5125	5965	6805	7645	8400	-
10 Cyc.	-	-	-	-	-	-	-	-	-	-	9520

STD: Standard

Technologies

- Reinforced Shoulder
- Special Compound
- Reinforced Bead

Performance

- Traction
- High Load Capacity
- High Puncture Resistance
- Stability
- Handling & Comfort



Radial



AGRIMAX RT 600

AGRIMAX RT 600 is the ideal tire for grassland, harvesting and spreading applications. Thanks to its large contact area, AGRIMAX RT 600 ensures an excellent pressure distribution on the land reducing damage on grassland and protecting your soil. Thanks to its round shoulder technology, the reinforced bead and increased number of lugs, it guarantees great stability and traction.

∅ 26”

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
620/75 R 26	167 A8/B	DW 20 B	-	625	1590	730	4851	750	STD

Load capacity (kg/tire)

km/h - bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2	3.6	3.8
50	2510	2890	3545	3870	4255	4635	5015	5450	-	-
40	2510	2890	3545	3870	4255	4635	5015	5450	-	-
30	2685	3095	3795	4145	4555	4960	5370	5835	-	-
10 LT	3365	3875	4750	5190	5700	6210	6725	7305	-	-
10 HT	2685	3095	3795	4145	4555	4960	5370	5835	-	-
10 Cyc.	-	4125	5285	5795	6720	7370	8065	8760	8895	9265

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
750/65 R 26	171 A8/B	DW 24 B	DW 23 B ; DW 25 B	750	1636	737	4987	775	STD

km/h - bar	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.4	3.8
50	2830	3260	3690	4000	4370	4860	5230	5720	6150	-	-
40	2830	3260	3690	4000	4370	4860	5230	5720	6150	-	-
30	3030	3495	3955	4285	4680	5205	5600	6125	6585	-	-
10 LT	3795	4370	4950	5360	5855	6515	7010	7670	8245	-	-
10 HT	3030	3495	3955	4285	4680	5205	5600	6125	6585	-	-
10 Cyc.	-	5240	5930	6425	7015	7810	8400	9190	9880	10010	10455

∅ 28”

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
540/65 R 28	142 D/145 A8	W 16 L	W 18 L	530	1413	642	4202	675	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	1485	1750	1990	2230	2440	2650
50	1560	1840	2090	2340	2565	2785
40	1625	1915	2175	2440	2670	2900
30	1710	2015	2290	2565	2810	3050
10 LT	1995	2350	2670	2990	3275	3555
10 HT	1710	2015	2290	2565	2810	3050

∅ 32”

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
650/75 R 32	172 A8/B	DW 21 B	DW 20 B ; DW 23 B	655	1789	807	5416	875	STD

km/h - bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2	3.4	3.8
50	2900	3340	4095	4475	4915	5355	5800	6300	-	-
40	2900	3340	4095	4475	4915	5355	5800	6300	-	-
30	3105	3575	4385	4790	5265	5735	6210	6745	-	-
10 LT	3885	4480	5490	6000	6590	7180	7770	8445	-	-
10 HT	3105	3575	4385	4790	5265	5735	6210	6745	-	-
10 Cyc.	-	4770	6105	6695	7765	8515	9320	10125	10285	10710

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
800/65 R 32	176 A8/173 B	DW 27 B	DH 27 B ; DW 25 B	775	1820	823	5558	875	STD

km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.0	3.2	3.6
50	3175	3660	4485	4900	5385	5865	6350	6500	-	-
40	3450	3975	4875	5325	5850	6375	6900	7100	-	-
30	3695	4255	5220	5700	6260	6825	7385	7600	-	-
10 LT	4625	5330	6535	7140	7840	8545	9250	9515	-	-
10 HT	3695	4255	5220	5700	6260	6825	7385	7600	-	-
10 Cyc.	-	5655	7230	7960	9250	10140	11055	11540	12025	12440

STD: Standard

Technologies

Reinforced Bead

Rounded Shoulder Technology

More Lugs

Performance

Ideal for Grassland

Stability

Traction

HARVESTER

AGRIMAX RT 600

∅ 32”

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
800/65 R 32	181 A8/178 B	DW 27 B	DH 27 B ; DW 25 B	775	1820	823	5558	875	STD
900/60 R 32	181 A8/178 B	DW 27 B	DH 28 B ; DW 30 B	896	1893	841	5697	925	STD
1050/50 R 32	184 A8/181 B	36.0 VA	-	1059	1863	826	5700	875	STD

Load capacity (kg/tire)

km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4
50	3175	3660	4485	4900	5385	5865	6350	6900	7500	-	-
40	3450	3975	4875	5325	5850	6375	6900	7500	8250	-	-
30	3695	4255	5220	5700	6260	6825	7385	8025	8830	-	-
10 LT	4625	5330	6535	7140	7840	8545	9250	10050	11055	-	-
10 HT	3695	4255	5220	5700	6260	6825	7385	8025	8830	-	-
10 Cyc	-	5655	7230	7960	9250	10140	11055	12025	12440	13000	14000

km/h - bar	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.4	3.8
50	3375	3825	4350	4800	5325	5925	6375	6975	7500	-	-
40	3715	4210	4785	5280	5860	6520	7015	7675	8250	-	-
30	3975	4505	5125	5655	6270	6980	7510	8215	8830	-	-
10 LT	4975	5640	6415	7080	7850	8735	9400	10285	11055	-	-
10 HT	3975	4505	5125	5655	6270	6980	7510	8215	8830	-	-
10 Cyc.	-	6765	7690	8485	9415	10475	11270	12330	13255	13465	14025

km/h - bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2	3.4	3.8
50	3715	4210	5280	5860	6520	7015	7675	8250	-	-
40	4050	4590	5760	6390	7110	7650	8370	9000	-	-
30	4335	4915	6165	6840	7610	8190	8960	9630	-	-
10 LT	5430	6155	7720	8565	9530	10255	11220	12060	-	-
10 HT	4335	4915	6165	6840	7610	8190	8960	9630	-	-
10 Cyc	-	6810	8725	9565	11095	11555	12645	13595	14195	15300

∅ 38”

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
650/65 R 38	157 D/160 A8	DW 20 B	-	645	1811	833	5443	875	STD
710/70 R 38	178 D/181 A8	DW 23 B	DW 25 B	706	1959	881	5926	925	STD

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
65	2310	2725	3095	3465	3795	4125
50	2430	2865	3255	3645	3990	4335
40	2520	2970	3375	3780	4140	4500
30	2660	3135	3560	3990	4370	4745
10 LT	3100	3650	4150	4650	5090	5530
10 HT	2660	3135	3560	3990	4370	4745

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2
65	2925	3450	3975	4425	4950	5400	5925	6375	6975	7500
50	3075	3625	4175	4650	5200	5670	6225	6695	7325	7875
40	3220	3795	4375	4870	5445	5940	6520	7015	7675	8250
30	3365	3970	4575	5090	5695	6210	6815	7335	8025	8625
10 LT	3920	4625	5330	5930	6635	7240	7940	8545	9350	10050
10 HT	3365	3970	4575	5090	5695	6210	6815	7335	8025	8625

STD: Standard

Technologies

- Reinforced Bead
- Rounded Shoulder Technology
- More Lugs

Performance

- Ideal for Grassland
- Stability
- Traction



Bias



STAR TRAC

STAR TRAC is the BKT tire for harvesters at cotton farms, which is able to support heavy loads. Thanks to its particularly deep tread design, it ensures both excellent traction in the fields and excellent performance during road transfers. On cotton plantations showing the typical middle-sized shrubs, harvesting demands tire features like excellent flotation and reduced soil compaction. Moreover, the tire is made of a special compound providing high resistance against cuts and typical damages of this application.

∅ 32"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version		Load capacity (kg/tire) km/h - bar	1.70
	DW 500/95 D 32	162 A8/169 A5	13.00 DW	-	500	1836	809	5324	STD		40	4750
											25	5800
	VA 500/95 D 32	179 A8/186 A5	13.00 VA	-	500	1836	809	5324	STD		km/h - bar	4.20
											40	7750
											25	9500

STD: Standard

Performance

High Load Capacity

High Puncture Resistance

Bias



HARVESTER SPECIAL

HARVESTER SPECIAL has been specifically designed for harvesters. Its dual –angled lugs provide excellent traction in the fields and a comfortable ride on the road. The special tread design provides a large contact area for extraordinary stability. HARVESTER SPECIAL features a strong casing and a particularly cut-and-chip resistant compound ensuring a longer tire life-cycle.

∅ 26"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR		Load capacity (kg/tire) km/h - bar	2.30
	23.1 - 26	159 A6	DW 20 B ; DW 20 A	-	587	1585	720	4806	DB	16		30	4375

DB: Dual Bead

Performance

Comfort

Cut and Chip Resistance

Stability

Traction

Bias



TR 137

TR 137 is BKT's most suitable tire for all harvesting operations. It ensures high flotation capability along with low soil compaction and excellent traction in the field. The tire is available in different versions: the "aramid-belted" version provides better puncture resistance and protection against all typical damages of this application; the "HD" version is for high load capacity to improve today's farmers' requirements in terms of productivity.

∅ 32"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	1.70
	24.5 - 32	DW 21 B	DW 20 B	622	1805	807	5343	STD	12	TL	159 A6		30	4375
	24.5 - 32	DW 21 B	DW 20 B	622	1805	807	5343	STD	14	TL	163 A6		km/h - bar	2.00
													30	4875
	30.5L - 32	DH 27 B	DW 27 B	770	1865	831	5520	STD	12	TL	162 A6		km/h - bar	1.40
													30	4750
	30.5L - 32	DH 27 B	DW 27 B	770	1865	831	5520	STD	14	TL	164 A6		km/h - bar	1.60
													30	5000
	30.5L - 32	DH 27 B	DW 27 B	770	1865	831	5520	STD	16	TL	167 A6		km/h - bar	1.80
													30	5450
	30.5L - 32	DH 27 B	DW 27 B	770	1865	831	5520	AB	18	TL	170 A6		km/h - bar	2.10
													30	6000
	30.5L - 32	DH 27 B	DW 27 B	770	1865	831	5520	HD	18	TL	170 A6		km/h - bar	2.10
													30	6000

STD: Standard - AB: Aramid Belted - HD: Heavy Duty

Technologies

- Aramid Belted
- Heavy Duty

Performance

- High Load Capacity
- Traction
- Durability
- Self-Cleaning
- Stubble resistance
- Cut and Chip Resistance

HARVESTER

Bias



TR 360

TR 360 is suitable for implement machinery in hay harvesting and lawn and garden applications. The particular tread design along with the casing structure provides excellent stability in all field conditions and ensures a long tire life-cycle.

∅ 8"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar 3.10
	18 X 7 - 8	5.5	-	180	460	202	1334	STD	6	TL	-		15: 450

STD: Standard

Performance

Durability



Bias



TR 882

TR 882 is a very versatile tire suitable for several applications and vehicles. Designed to fit implement machinery and hay harvesters/balers, its usage is not only limited to soil tillage and hay harvesting operations. BKT has developed a specific TR 882 version to use the tire in forestry applications with trailers. TR 882 is also available as "aramid-belted", "HD" and "special" versions to meet specific end user requirements.

∅ 15.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	2.40
	400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	8	TL	122 A8	134 A8	10 FR	2970
													25 FR	2525
													30 FR	2375
													40 FR	2120
													10 DW	2100
													25 DW	1785
													30 DW	1680
													40 DW	1500

													km/h - bar	3.60
	400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	14	TL	132 A8	145 A8	10 FR	4060
													25 FR	3450
													30 FR	3250
													40 FR	2900
													10 DW	2800
													25 DW	2380
													30 DW	2240
													40 DW	2000

													km/h - bar	3.60
	400/60 - 15.5	AG 13.00	-	400	875	380	2564	AB	14	TL	132 A8	145 A8	10 FR	4060
													25 FR	3450
													30 FR	3250
													40 FR	2900
													10 DW	2800
													25 DW	2380
													30 DW	2240
													40 DW	2000

													km/h - bar	3.60
	400/60 - 15.5	AG 13.00	-	400	875	380	2564	HD	14	TL	132 A8	145 A8	10 FR	4060
													25 FR	3450
													30 FR	3250
													40 FR	2900
													10 DW	2800
													25 DW	2380
													30 DW	2240
													40 DW	2000

STD: Standard - AB: Aramid Belted - HD: Heavy Duty

Technologies

Special Compound

Aramid Belted

Heavy Duty

Performance

Cut and Chip Resistance

Stubble Resistance

Durability

Traction

TR 882

∅ 15.5”

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	3.60
400/60 - 15.5	AG 13.00	-	400	875	380	2564	SPL	14	TL	132 A8	145 A8	10 FR	4060
												25 FR	3450
												30 FR	3250
												40 FR	2900
												10 DW	2800
												25 DW	2380
												30 DW	2240
												40 DW	2000

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	4.50
400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	18	TL	137 A8	149 A8	10 FR	4550
												25 FR	3870
												30 FR	3640
												40 FR	3250
												10 DW	3220
												25 DW	2735
												30 DW	2575
												40 DW	2300

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	4.50
400/60 - 15.5	AG 13.00	-	400	875	380	2564	AB	18	TL	137 A8	149 A8	10 FR	4550
												25 FR	3870
												30 FR	3640
												40 FR	3250
												10 DW	3220
												25 DW	2735
												30 DW	2575
												40 DW	2300

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	4.50
400/60 - 15.5	AG 13.00	-	400	875	380	2564	HD	18	TL	137 A8	149 A8	10 FR	4550
												25 FR	3870
												30 FR	3640
												40 FR	3250
												10 DW	3220
												25 DW	2735
												30 DW	2575
												40 DW	2300

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	4.50
400/60 - 15.5	AG 13.00	-	400	875	380	2564	SPL	18	TL	137 A8	149 A8	10 FR	4550
												25 FR	3870
												30 FR	3640
												40 FR	3250
												10 DW	3220
												25 DW	2735
												30 DW	2575
												40 DW	2300

STD: Standard - AB: Aramid Belted - HD: Heavy Duty - SPL: Special

Technologies

- Special Compound
- Aramid Belted
- Heavy Duty

Performance

- Cut and Chip Resistance
- Stubble Resistance
- Durability
- Traction

Bias



FLOTATION 558

FLOTATION 558 is a cross-ply flotation tire suitable for hay harvesters/balers, implement machinery and trailers both on and off the road. It is particularly recommended on muddy grounds and whenever traction and high flotation are essential for good soil tillage.

∅ 22.5" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	3.00	3.20	3.50
400/55 - 22.5	AG 11.75	12.25 ; 13.00 ; AG 13.00	405	1020	445	3084	STD	14	TL	138 A8/134 B	150 A8/146 B	10 FR	4285	4450	4690
												20 FR	3855	4005	4220
												30 FR	3425	3560	3750
												40 FR	3060	3180	3350
												50 FR	2755	2860	3000
												10 DW	3015	3135	3305
												20 DW	2715	2820	2975
												30 DW	2415	2510	2645
												40 DW	2155	2240	2360
												50 DW	1940	2015	2120

												km/h - bar	3.70	3.80	4.00
400/55 - 22.5	AG 11.75	12.25 ; 13.00 ; AG 13.00	405	1020	445	3084	STD	16	TL	140 A8/136 B	152 A8/148 B	10 FR	4745	4825	4970
												20 FR	4270	4340	4475
												30 FR	3795	3860	3975
												40 FR	3390	3445	3550
												50 FR	3050	3100	3150
												10 DW	3345	3395	3500
												20 DW	3010	3055	3150
												30 DW	2675	2715	2800
												40 DW	2390	2425	2500
												50 DW	2150	2185	2240

												km/h - bar	3.70	3.80	4.00
400/55 - 22.5	AG 11.75	12.25 ; 13.00 ; AG 13.00	405	1020	445	3084	AB HD	16	TL	140 A8/136 B	152 A8/148 B	10 FR	4745	4825	4970
												20 FR	4270	4340	4475
												30 FR	3795	3860	3975
												40 FR	3390	3445	3550
												50 FR	3050	3100	3150
												10 DW	3345	3395	3500
												20 DW	3010	3055	3150
												30 DW	2675	2715	2800
												40 DW	2390	2425	2500
												50 DW	2150	2185	2240

STD: Standard - AB HD: Aramid Belted HD

Performance

High Load Capacity

Durability

Traction

FLOTATION 558

∅ 22.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	4.60	4.80	5.00
	400/55 - 22.5	AG 11.75	12.25 ; 13.00 ; AG 13.00	405	1020	445	3084	STD	20	TL	144 A8/140 B	156 A8/152 B		**10 FR**	5335	5465	5600
														20 FR	4800	4920	5040
														30 FR	4265	4375	4480
														40 FR	3810	3905	4000
														50 FR	3430	3515	3550
														10 DW	3730	3830	3920
														20 DW	3360	3445	3530
														30 DW	2985	3065	3135
														40 DW	2665	2735	2800
														50 DW	2400	2460	2500

														km/h - bar	2.30	2.50	2.70
	500/45 - 22.5	AG 16.00	-	500	1045	471	3167	STD	12	TL	136 A8/132 B	148 A8/144 B		**10 FR**	4020	4215	4410
														20 FR	3615	3795	3970
														30 FR	3215	3370	3530
														40 FR	2870	3010	3150
														50 FR	2585	2710	2800
														10 DW	2855	2995	3135
														20 DW	2570	2695	2820
														30 DW	2285	2395	2510
														40 DW	2040	2140	2240
														50 DW	1835	1925	2000

														km/h - bar	3.20	3.40	3.60
	500/45 - 22.5	AG 16.00	-	500	1045	471	3167	STD	16	TL	142 A8/138 B	154 A8/150 B		**10 FR**	4900	5075	5250
														20 FR	4410	4570	4725
														30 FR	3920	4060	4200
														40 FR	3500	3625	3750
														50 FR	3150	3265	3350
														10 DW	3465	3590	3710
														20 DW	3120	3230	3340
														30 DW	2770	2875	2970
														40 DW	2475	2565	2650
														50 DW	2230	2310	2360

														km/h - bar	3.20	3.40	3.60
	500/45 - 22.5	AG 16.00	-	500	1045	471	3167	AB HD	16	TL	142 A8/138 B	154 A8/150 B		**10 FR**	4900	5075	5250
														20 FR	4410	4570	4725
														30 FR	3920	4060	4200
														40 FR	3500	3625	3750
														50 FR	3150	3265	3350
														10 DW	3465	3590	3710
														20 DW	3120	3230	3340
														30 DW	2770	2875	2970
														40 DW	2475	2565	2650
														50 DW	2230	2310	2360

STD: Standard - AB HD: Aramid Belted HD

Performance

High Load Capacity

Durability

Traction

FLOTATION 558

∅ 22.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	4.30	4.40	4.50
	500/45 - 22.5	AG 16.00	-	500	1045	471	3167	STD	20	TL	146 A8/142 B	158 A8/154 B		10 FR	5795	5875	5950
														20 FR	5215	5285	5355
														30 FR	4635	4700	4760
														40 FR	4140	4195	4250
														50 FR	3725	3775	3750
														10 DW	4090	4145	4200
														20 DW	3680	3730	3780
														30 DW	3270	3315	3360
														40 DW	2920	2960	3000
														50 DW	2630	2665	2650

STD: Standard

Performance

High Load Capacity

Durability

Traction



HARVESTER

Bias



BK 308

BK 308 has been specially designed for trailers and utility tractors. It features excellent traction on all surfaces and tread tie bars to reduce tread groove cracking. The strong casing provides excellent durability and puncture resistance whereas the special tread compound ensures a longer service life.

∅ 20"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 4.8
	6.50 - 20	5.50 F	4.00 E ; 5.00 F	190	865	-	-	STD	10	TT	112 A6		30	1120

STD: Standard

Performance

Durability

High Puncture Resistance


Traction



PIVOT IRRIGATOR

PIVOT IRRIGATOR

Bias



TR 117

TR 117 is ideal for irrigation applications with pivot irrigators. In line with BKT's commitment to design tires that protect the soil, the TR 117 tire has round-shaped lugs to reduce soil damage and protect the precious crops.

Performance

Self-Cleaning

∅ 24"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire)	
													km/h - bar	1.20
	11.2 - 24	W 10	W 9	284	1090	509	3205	STD	4	TT	101 A6		30	825
	11.2 - 24	W 10	W 9	284	1090	509	3205	STD	4	TL	101 A6		km/h - bar	1.20
													30	825
	11.2 - 24	W 10	W 9	284	1090	509	3205	STD	6	TT	110 A6		km/h - bar	1.80
													30	1060
	11.2 - 24	W 10	W 9	284	1090	509	3205	STD	6	TL	110 A6		km/h - bar	1.80
													30	1060
	13.6 - 24	W 12	W 11	350	1187	541	3591	STD	6	TT	119 A6		km/h - bar	2.20
													30	1360
	13.6 - 24	W 12	W 11	350	1187	541	3591	STD	6	TL	119 A6		km/h - bar	2.20
													30	1360
	14.9 - 24	W 13	W 11 ; W 12	378	1245	575	3660	STD	4	TT	112 A6		km/h - bar	0.80
													30	1120
	14.9 - 24	W 13	W 11 ; W 12	378	1245	575	3660	STD	4	TL	112 A6		km/h - bar	0.80
													30	1120
	14.9 - 24	W 13	W 11 ; W 12	378	1245	575	3660	STD	6	TT	123 A6		km/h - bar	1.40
													30	1550
	14.9 - 24	W 13	W 11 ; W 12	378	1245	575	3660	STD	6	TL	123 A6		km/h - bar	1.40
													30	1550

STD: Standard

TR 117

Performance

Self-Cleaning

∅ 24"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 1.80
	14.9 - 24	W 13	W 11 ; W 12	378	1245	575	3660	STD	8	TT	128 A6		**30**	1800
	14.9 - 24	W 13	W 11 ; W 12	378	1245	575	3660	STD	8	TL	128 A6		**km/h - bar**	**1.80**
													30	1800
	14.9 - 24	W 13	W 11 ; W 12	378	1245	575	3660	HD	8	TL	128 A6		**km/h - bar**	**1.80**
													30	1800
∅ 38"	**11.2 - 38**	W 10	W 9	284	1445	675	4400	STD	4	TT	109 A6		**km/h - bar**	**1.30**
													30	1030
	11.2 - 38	W 10	W 9	284	1445	675	4400	STD	4	TL	109 A6		**km/h - bar**	**1.30**
													30	1030
	11.2 - 38	W 10	W 9	284	1445	675	4400	STD	6	TT	117 A6		**km/h - bar**	**1.80**
													30	1285
	11.2 - 38	W 10	W 9	284	1445	675	4400	STD	6	TL	117 A6		**km/h - bar**	**1.80**
													30	1285

HD: Heavy Duty - STD: Standard



PIVOT IRRIGATOR

Bias



TR 118

TR 118 has been engineered for irrigation machinery. Its specially designed tread pattern provides excellent traction and outstanding self-cleaning properties. TR 118 features a particularly deep tread along with a strong nylon casing, which enable a longer service life.

∅ 24"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 1.80
	14.9 - 24	W 13	W 12 ; W 11	380	1265	566	3742	STD	8	TL	128 A6		30	1800


STD: Standard

Technologies

More Lugs

PIVOT IRRIGATOR

Radial



AGRIMAX RI 818

AGRIMAX RI 818 is a radial tire, which has been specifically developed for irrigation applications with pivot irrigators. Its specially designed tread pattern provides excellent traction in wet and muddy conditions in addition to outstanding self-cleaning properties.

∅ 24"	Tire size	LI/SS Drive Wheel	LI/SS Free Rolling	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version		Load capacity (kg/tire) km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6
	280/85 R 24 IMP	115 A8	127 A8	W10	W 9	287	1086	-	-	525	STD		**40 FR**	670	780	890	1000	1110	1215
													30 FR	755	875	1000	1120	1245	1365
													20 FR	845	985	1125	1260	1400	1535
													10 FR	940	1095	1245	1400	1555	1705
													40 DW	960	1120	1278	1435	1590	1750
													30 DW	1080	1255	1430	1610	1785	1960
													20 DW	1215	1410	1610	1810	2010	2205
													10 DW	1350	1570	1790	2010	2230	2450
													Static	1575	1835	2090	2350	2605	2860
∅ 38"	**320/85 R 38 IMP**	129 A8	142 A8	W 10	W 9 ; W 11	319	1509	-	-	725	STD		**km/h - bar**	**0.6**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**
													40 FR	1020	1185	1355	1520	1685	1850
													30 FR	1145	1330	1515	1705	1890	2075
													20 FR	1285	1495	1705	1915	2125	2335
													10 FR	1425	1660	1895	2125	2360	2590
													40 DW	1460	1700	1935	2175	2410	2650
													30 DW	1635	1900	2170	2435	2705	2970
													20 DW	1840	2140	2440	2740	3040	3340
													10 DW	2040	2375	2710	3045	3375	3710
													Static	2395	2785	3180	3570	3960	4350

STD: Standard

Performance

Self-Cleaning

Traction

FLOTATION

FLOTATION

Radial



RIDEMAX FL 699

RIDEMAX FL 699 is the perfect BKT tire for road applications with trailers and tank trucks. This All Steel tire stands out for its high mileage and durability. The reinforced bead ensures better stability even at high speeds. Even if this radial tire has been designed for a 90% on-the-road usage, i.e. for transport in farming applications, the new RIDEMAX FL 699 also provides excellent performance in the fields. The tire has been designed with a particular focus on load capacity to decrease the number of transport cycles. Good news also to farmers who know the sensation when a trailer seems to compromise driving: RIDEMAX FL 699 ensures an extraordinarily comfortable ride providing safety and driving control.

∅ 17"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 6.0
	24 R 20.5	176 F	18.00	-	590	1370	613	4165	-	STD		80	7100

STD: Standard

Technologies

All Steel

High Speed

Reinforced Bead

Performance

High Mileage

Durability

High Load Capacity

Stability

Cut and Chip Resistance

Radial



V-FLEXA

V-FLEXA is a radial tire specifically designed for agricultural trailers. It is a latest-generation flotation product featuring VF technology, which enables the transport of heavy loads both in the fields and on the road with an inflation pressure that is 30% less than that of a standard tire of the same size. Additional steel belts confer major resistance to the casing against impacts. Not only does V-FLEXA support heavy loads in full safety, it also avoids soil compaction thanks to perfect weight distribution. Moreover, V-FLEXA features great self-cleaning properties, durability as well as low rolling resistance.

∅ 26.5"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire) km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8
	VF 600/55 R 26.5	167 D	AG 20.00	-	615	1342	580	3986	650	SB	70	2130	2725	3315	3765	4360	4955
											65	2340	2995	3650	4140	4795	5450
											50	2740	3505	4270	4845	5610	6375
											40	3020	3865	4710	5340	6185	7030
											10	3840	4910	5985	6790	7860	8935
	VF 650/55 R 26.5	171 D	AG 20.00	-	644	1389	591	4100	-	SB	km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8
											70	2405	3075	3745	4250	4920	5595
											65	2640	3380	4120	4670	5410	6150
											50	3090	3955	4820	5465	6330	7195
											40	3405	4360	5310	6025	6975	7930
											10	4335	5545	6755	7660	8870	10085

SB: Steel Belted

Technologies

- Low Rolling Resistance
- VF Technology
- Extra Steel Belted
- Reinforced Bead
- High Speed

Performance

- Reduced Soil Compaction
- High Load Capacity
- Self-Cleaning
- Durability
- Traction

FLOTATION

Radial



FL 633 PERFORMA

The new All Steel radial tire FL 633 PERFORMA perfectly combines the needs of several agricultural applications with the growing demand for logistics in agriculture. Specifically designed for agro trucks, FL 633 PERFORMA is the innovative solution that enhances both tractor and truck performance features to meet the special needs of modern farming. Thanks to its very strong casing, exceptional load capacity and durability, FL 633 PERFORMA signs the "next level" of flotation tires being suitable for multiple activities in the fields and even for travel on highways reaching up to 100 km/h.

∅ 22.5"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 6.5
	600/50 R 22.5	164 J	AG 20.00	-	590	1170	534	3559	-	STD		**100**	5000

STD: Standard

Technologies

High Speed

All Steel

Strong Casing

Performance

High Load Capacity

Durability

Self-Cleaning

Multi-Purpose Tires



FLOTATION

Radial



RIDEMAX FL 690

RIDEMAX FL 690 is a radial flotation and transport tire for tank trucks, trailers and spreaders. The tire is suitable for 75% on-the-road applications. Its special tread design provides outstanding self-cleaning properties in the field. As a response to the increasing demand for high loads in modern agriculture, BKT has designed this steel-belted tire withstanding very heavy loads and increasing the farmer's productivity.

RIDEMAX

∅ 26"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version		Load capacity (kg/tire) km/h - bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8
	28L R 26	176 A8/173 B	DW 25 B	DW 23 B	719	1590	695	4745	750	STD		50	3120	3560	4325	4680	5330	5915	6500
												40	3410	3885	4725	5115	5825	6465	7100
												30	3820	4355	5295	5730	6525	7240	7955
												25	4060	4625	5620	6085	6930	7690	8450
												10	4775	5440	6615	7160	8155	9050	9940

∅ 32"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version		km/h - bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.0
	30.5L R 32	181 B	DH 27 B	DW 27 B	790	1800	806	5430	875	STD		50	3795	4375	5280	5695	6520	7260	7920	8250
												40	4370	5030	6075	6550	7500	8355	9115	9490
												30	4935	5685	6865	7405	8475	9440	10300	10725
												25	5205	5995	7240	7805	8935	9950	10855	11305
												10	6040	6955	8400	9055	10365	11550	12600	13120

STD: Standard

Technologies

Steel Belted

Reinforced Bead

High Speed

Block Pattern

Performance

Road Oriented

Durability

Fuel Economy



Radial



RIDEMAX FL 693 M

RIDEMAX FL 693 M is the ideal radial tire for those who frequently travel on the road with trailers/tank trucks. Actually designed for 75% on-the-road use, RIDEMAX FL 693 M provides excellent road performance prioritizing both comfort and self-cleaning properties. The speed index classes D/E of the range stands for higher speeds when travelling on the road leading to significant time savings. The low rolling resistance contributes to less fuel consumption.

RIDEMAX

∅ 17"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire)

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
65	595	760	945	1075	1240	1410	1540	1685	1850
50	720	920	1145	1300	1505	1705	1860	2040	2240
40	800	1025	1275	1450	1675	1900	2075	2275	2500
30	895	1150	1430	1625	1875	2125	2320	2545	2795
25	940	1200	1495	1700	1960	2225	2430	2665	2925
10	1070	1370	1700	1935	2235	2535	2765	3035	3330

425/55 R 17 | 129 D/140 A8 | 13.00 | - | 420 | 894 | 397 | 2704 | 425 | STD

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0
70	990	1110	1350	1530	1770	2010	2220	2430	2670	3000
65	1075	1205	1465	1660	1920	2180	2405	2635	2895	3250
50	1305	1460	1775	2010	2325	2640	2915	3190	3505	3935
40	1465	1640	1990	2255	2610	2965	3275	3585	3935	4420
25	1695	1900	2315	2620	3030	3445	3800	4160	4575	5135
10	1935	2165	2635	2985	3455	3920	4330	4740	5210	5850

500/50 R 17 | 149 D/146 E | 16.00 | - | 503 | 932 | 424 | 2833 | 450 | STD

∅ 17.5"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire)

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	6.0
70	1000	1280	1595	1795	2075	2355	2595	2830	3110	3510	3985
65	1095	1400	1750	1970	2275	2585	2845	3110	3415	3850	4375
50	1325	1695	2120	2385	2755	3125	3445	3760	4135	4660	5295
40	1490	1905	2380	2680	3095	3515	3870	4225	4645	5240	5950
30	1655	2120	2645	2975	3440	3900	4300	4695	5160	5820	6610
25	1730	2215	2770	3115	3600	4080	4495	4910	5395	6090	6915
10	1970	2520	3150	3545	4095	4650	5120	5595	6145	6930	7875

VF 400/45 R 17.5 | 159 D | 14.00 | - | 400 | 800 | 343 | 2357 | 390 | SB

∅ 22.5"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire)

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1000	1120	1390	1585	1830	2075	2265	2480	2725
65	1095	1230	1530	1740	2010	2280	2490	2730	3000
50	1330	1490	1855	2110	2435	2760	3015	3305	3630
40	1495	1675	2085	2370	2735	3105	3390	3715	4080
25	1735	1945	2420	2750	3180	3605	3935	4315	4740
10	1975	2215	2755	3135	3620	4105	4485	4915	5400

500/45 R 22.5 | 146 D/143 E | AG 16.00 | - | 503 | 1022 | 455 | 3114 | 500 | STD

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1320	1495	1775	2095	2400	2665	2985	3270	3550
65	1435	1630	1940	2290	2620	2910	3255	3565	3875
50	1740	1970	2345	2770	3170	3520	3940	4315	4690
40	1955	2215	2635	3110	3560	3955	4430	4850	5270
25	2270	2575	3065	3615	4135	4595	5145	5635	6125
10	2585	2930	3490	4120	4710	5235	5860	6420	6975

500/60 R 22.5 | 155 D/152 E | AG 16.00 | 15.00 ; 17.00 | 503 | 1172 | 531 | 3577 | 550 | STD

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1205	1365	1625	1920	2195	2440	2730	2990	3250
65	1320	1495	1775	2095	2400	2665	2985	3270	3550
50	1595	1810	2150	2540	2905	3225	3615	3960	4300
40	1790	2030	2415	2850	3265	3625	4060	4445	4830
25	2080	2360	2805	3310	3790	4210	4715	5165	5610
10	2365	2685	3195	3775	4315	4795	5370	5880	6390

560/45 R 22.5 | 152 D/149 E | AG 16.00 | - | 543 | 1076 | 484 | 3270 | 525 | STD

Technologies

- Steel Belted
- Reinforced Bead
- High Speed
- Block Pattern

Performance

- Road Oriented
- Durability
- Fuel Economy
- Self-Cleaning

STD: Standard

RIDEMAX FL 693 M

∅ 22.5" Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
560/55 R 22.5	158 D/155 E	AG 16.00	17.00 ; 20.00	543	1180	533	3614	550	STD

Load capacity (kg/tire)

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	5.0
70	1435	1630	1940	2290	2620	2910	3255	3565	3875
65	1575	1785	2125	2510	2870	3190	3570	3910	4250
50	1910	2165	2575	3040	3475	3860	4325	4735	5145
40	2140	2430	2890	3415	3905	4335	4860	5320	5780
25	2490	2825	3360	3965	4535	5040	5645	6180	6715
10	2835	3215	3825	4515	5165	5740	6430	7040	7650

560/60 R 22.5	165 D/162 E	AG 16.00	16.00 ; 17.00 ; AG 20.00	543	1244	549	3767	600	STD

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0
70	1555	1745	2170	2465	2850	3230	3530	3870	4250	4750
65	1690	1900	2360	2685	3100	3515	3840	4210	4625	5150
50	2050	2300	2860	3250	3755	4260	4650	5100	5600	6235
40	2300	2580	3210	3650	4215	4785	5225	5725	6290	7005
25	2670	3000	3730	4240	4900	5560	6070	6655	7310	8140
10	3040	3415	4250	4830	5580	6330	6910	7580	8325	9270

560/60 R 22.5	161 D/158 E	AG 16.00	16.00 ; 17.00 ; AG 20.00	543	1244	549	3767	600	STD

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1555	1745	2170	2465	2850	3230	3530	3870	4250
65	1690	1900	2360	2685	3100	3515	3840	4210	4625
50	2050	2300	2860	3250	3755	4260	4650	5100	5600
40	2300	2580	3210	3650	4215	4785	5225	5725	6290
25	2670	3000	3730	4240	4900	5560	6070	6655	7310
10	3040	3415	4250	4830	5580	6330	6910	7580	8325

580/65 R 22.5	166 D/163 E	AG 18.00	AG 16.00 ; AG 17.00 ; AG 20.00	577	1326	572	4031	625	STD

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1805	2050	2440	2880	3295	3660	4095	4485	4875
65	1965	2230	2650	3130	3580	3975	4455	4880	5300
50	2375	2695	3210	3785	4335	4815	5390	5905	6415
40	2670	3030	3605	4255	4870	5410	6060	6635	7210
25	3100	3520	4190	4945	5655	6285	7035	7705	8375
10	3535	4010	4770	5630	6440	7155	8015	8780	9540

600/50 R 22.5	159 D/156 E	AG 20.00	-	611	1172	516	3546	550	STD

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1480	1680	2040	2360	2720	3080	3320	3680	4000
65	1620	1840	2235	2585	2975	3370	3635	4025	4375
50	1960	2225	2705	3125	3605	4080	4395	4875	5295
40	2205	2500	3035	3515	4050	4585	4940	5475	5950
25	2560	2905	3530	4080	4705	5325	5740	6365	6915
10	2915	3310	4020	4650	5355	6065	6540	7245	7875

650/50 R 22.5	163 D/160 E	AG 20.00	-	645	1222	535	3715	575	STD

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1645	1845	2295	2610	3015	3420	3735	4095	4500
65	1780	2000	2490	2830	3270	3705	4050	4440	4875
50	2155	2420	3010	3425	3955	4485	4900	5370	5900
40	2425	2720	3385	3850	4445	5040	5505	6035	6630
25	2815	3160	3930	4470	5165	5860	6400	7015	7705
10	3205	3600	4480	5090	5880	6670	7285	7990	8775

650/50 R 22.5	168 D	AG 20.00	-	645	1222	535	3715	575	STD

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0
70	1480	1890	2295	2605	3010	3420	3775	4135	4540	5100
65	1625	2075	2520	2860	3305	3755	4145	4540	4985	5600
50	1970	2510	3080	3460	4005	4545	5020	5495	6035	6780
40	2210	2820	3465	3890	4500	5110	5640	6175	6785	7620
30	2455	3135	3845	4315	4995	5670	6265	6855	7530	8460
25	2570	3275	4020	4515	5225	5930	6550	7170	7880	8850
10	2925	3730	4580	5145	5950	6755	7460	8165	8975	10080

STD: Standard - HD: Heavy Duty

Technologies

Steel Belted

Reinforced Bead

High Speed

Block Pattern

Performance

Road Oriented

Durability

Fuel Economy

Self-Cleaning

RIDEMAX FL 693 M

∅ 22.5"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	710/45 R 22.5	165 D	AG 24.00	-	706	1212	542	3658	575	STD
	710/35 R 22.5	157 D/154 E	AG 24.00	-	712	1070	482	3254	525	STD
∅ 26.5"	600/55 R 26.5	165 D	AG 20.00	-	611	1333	586	4051	625	STD
	600/55 R 26.5	177 D	AG 20.00	-	611	1333	584	4077	625	HD
	650/55 R 26.5	169 D	AG 20.00	-	645	1389	608	4216	650	STD
	650/55 R 26.5	178 D	AG 20.00	-	645	1389	609	4250	650	HD
	710/50 R 26.5	170 D	AG 24.00	AG 20.00	727	1383	606	4174	650	STD

Load capacity (kg/tire)

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1715	1925	2390	2720	3140	3565	3890	4265	4685
65	1880	2115	2630	2990	3455	3915	4275	4690	5150
50	2280	2560	3180	3620	4180	4740	5180	5675	6235
40	2560	2875	3575	4065	4695	5325	5815	6375	7005
30	2840	3190	3970	4515	5215	5915	6460	7080	7780
25	2975	3340	4155	4725	5455	6190	6760	7410	8140
10	3385	3805	4730	5380	6215	7050	7695	8440	9270

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1370	1540	1915	2175	2515	2850	3115	3415	3750
65	1510	1695	2105	2395	2765	3135	3425	3755	4125
50	1825	2050	2550	2900	3350	3800	4150	4550	4995
40	2050	2305	2865	3255	3760	4265	4660	5110	5610
30	2275	3555	3180	3615	4175	4735	5175	5670	6230
25	2380	2675	3330	3785	4370	4960	5415	5935	6520
10	2715	3045	3790	4310	4975	5645	6165	6760	7425

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1740	1970	2395	2770	3190	3615	3895	4315	4690
65	1910	2165	2630	3040	3505	3970	4275	4740	5150
50	2310	2620	3180	3680	4240	4805	5180	5740	6235
40	2595	2945	3575	4135	4765	5395	5815	6445	7005
25	3015	3420	4155	4805	5540	6270	6760	7490	8140
10	3435	3895	4730	5470	6305	7140	7695	8530	9270

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	6.0
65	2265	2705	3285	3800	4380	4965	5330	5915	6500	6865	7300
50	2740	3270	3980	4595	5305	6010	6450	7160	7865	8305	8835
40	3080	3675	4470	5165	5960	6755	7250	8045	8840	9335	9930
30	3420	4080	4965	5735	6615	7500	8050	8935	9815	10365	11025
25	3580	4270	5195	6000	6925	7845	8425	9345	10270	10845	11535
10	4075	4865	5915	6835	7885	8940	9595	10645	11695	12355	13140

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1965	2230	2705	3130	3605	4085	4400	4880	5300
65	2150	2440	2960	3425	3945	4470	4815	5340	5800
50	2600	2950	3585	4145	4775	5410	5830	6460	7020
40	2920	3315	4025	4660	5370	6080	6550	7260	7890
25	3395	3850	4675	5410	6235	7060	7610	8435	9165
10	3865	4385	5325	6160	7100	8040	8670	9605	10440

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	6.0
65	2325	2775	3375	3900	4500	5100	5475	6075	6675	7050	7500
50	2815	3360	4085	4720	5445	6175	6625	7355	8080	8535	9075
40	3165	3775	4590	5305	6120	6940	7450	8265	9080	9590	10200
30	3515	4195	5100	5890	6795	7705	8270	9175	10080	10650	11325
25	3675	4385	5335	6165	7110	8060	8655	9600	10550	11140	11850
10	4185	4995	6075	7020	8100	9180	9855	10935	12015	12690	13500

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	2020	2290	2780	3220	3710	4200	4525	5015	5450
65	2220	2520	3060	3540	4080	4620	4980	5520	6000
50	2690	3050	3705	4285	4940	5595	6030	6680	7260
40	3025	3430	4165	4815	5550	6285	6775	7510	8160
25	3510	3985	4835	5595	6450	7300	7870	8725	9480
10	4000	4540	5510	6375	7345	8320	8965	9940	10800

STD: Standard - HD: Heavy Duty

Technologies

- Steel Belted
- Reinforced Bead
- High Speed
- Block Pattern

Performance

- Road Oriented
- Durability
- Fuel Economy
- Self-Cleaning

RIDEMAX FL 693 M

∅ 26.5”

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
710/50 R 26.5	179 D	AG 24.00	AG 20.00	727	1383	606	4174	650	STD

Load capacity (kg/tire)

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	6.0
70	1765	2260	2825	3175	3670	4165	4590	5010	5505	6210	7055
65	1940	2480	3100	3490	4030	4575	5040	5505	6045	6820	7750
50	2345	3005	3755	4225	4880	5535	6100	6660	7320	8255	9380
40	2635	3375	4220	4745	5485	6220	6855	7485	8225	9280	10540
30	2930	3750	4685	5270	6090	6910	7610	8315	9130	10305	11705
25	3065	3920	4900	5515	6370	7225	7960	8695	9555	10780	12245
10	3490	4465	5580	6280	7255	8235	9070	9905	10885	12280	13950

∅ 30.5”

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
710/50 R 30.5	173 D	AG 24.00	AG 20.00	727	1485	656	4510	700	STD

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	2220	2520	3060	3540	4080	4620	4980	5520	6000
65	2405	2730	3315	3835	4420	5005	5395	5980	6500
50	2915	3305	4015	4645	5350	6060	6530	7240	7865
40	3275	3715	4510	5220	6015	6810	7340	8135	8840
25	3805	4315	5240	6060	6985	7910	8525	9450	10270
10	4330	4915	5970	6905	7960	9010	9715	10765	11700

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
750/60 R 30.5	181 D	AG 24.00	-	754	1675	728	5092	800	STD

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	2780	3155	3835	4435	5110	5785	6235	6910	7510
65	3055	3465	4210	4870	5610	6355	6850	7590	8250
50	3700	4195	5095	5895	6790	7690	8290	9190	9985
40	4155	4715	5725	6620	7630	8640	9315	10325	11220
25	4825	5475	6650	7695	8865	10040	10820	11995	13035
10	5500	6240	7575	8765	10100	11435	12330	13665	14850

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
850/50 R 30.5	182 D	AG 28.00	-	862	1625	719	4925	725	STD

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	2865	3250	3945	4565	5260	5960	6425	7120	7735
65	3145	3570	4335	5015	5780	6545	7055	7820	8500
50	3810	4320	5250	6070	6995	7920	8540	9465	10285
40	4280	4860	5900	6825	7865	8905	9595	10640	11560
25	4975	5645	6850	7925	9135	10345	11150	12360	13430
10	5665	6430	7805	9030	10405	11785	12700	14080	15300

STD: Standard

Technologies

- Steel Belted
- Reinforced Bead
- High Speed
- Block Pattern

Performance

- Road Oriented
- Durability
- Fuel Economy
- Self-Cleaning



Radial



FL 630 SUPER

FL 630 SUPER is suitable for trailers, tankers and spreaders. Thanks to its constructive features and tread design, FL630 SUPER is the ideal tire for multipurpose use on any kind of land or on the road, where qualities like uniform drive and resistance are further highlighted.

∅ 22.5"

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
560/60 R 22.5	161 D	AG 16.00	17.00 ; 20.00	543	1244	549	3785	600	STD

Load capacity (kg/tire)

km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1360	1575	1785	2125	2510	2870	3190	3570	3910	4250
65	1480	1715	1945	2315	2730	3125	3470	3885	4255	4625
50	1795	2075	2355	2800	3305	3780	4200	4705	5155	5600
40	2015	2330	2645	3145	3715	4250	4720	5285	5790	6290
25	2340	2710	3075	3655	4315	4935	5485	6145	6730	7310
10	2665	3085	3500	4165	5915	5620	6245	6995	7660	8325

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
560/60 R 22.5	165 D	AG 16.00	17.00 ; 20.00	543	1244	549	3785	600	STD

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1715	1925	2395	2725	3145	3565	3895	4270	4690
65	1880	2115	2630	2990	3455	3915	4275	4690	5150
50	2280	2560	3180	3620	4180	4740	5180	5675	6235
40	2560	2875	3575	4065	4695	5325	5815	6375	7005
25	2975	3340	4155	4725	5455	6190	6760	7410	8140
10	3385	3805	4730	5380	6215	7050	7695	8440	9270

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
580/65 R 22.5	166 D	AG 18.00	AG 16.00 ; AG 17.00 ; AG 20.00	577	1326	594	4058	625	STD

km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1560	1805	2050	2440	2880	3295	3660	4095	4485	4875
65	1700	1965	2230	2650	3130	3580	3975	4455	4880	5300
50	2055	2375	2695	3210	3785	4335	4815	5390	5905	6415
40	2310	2670	3030	3605	4255	4870	5410	6060	6635	7210
25	2680	3100	3520	4190	4945	5655	6285	7035	7705	8375
10	3055	3535	4010	4770	5630	6440	7155	8015	8780	9540

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
600/50 R 22.5	159 D	AG 20.00	-	611	1170	518	3533	550	STD

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1455	1635	2035	2315	2670	3030	3310	3630	3985
65	1600	1795	2235	2540	2935	3325	3635	3985	4375
50	1935	2175	2705	3075	3550	4025	4395	4820	5295
40	2175	2440	3035	3455	3990	4525	4940	5415	5950
25	2525	2840	3530	4015	4635	5260	5740	6295	6915
10	2875	3230	4020	4570	5280	5985	6540	7170	7875

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
600/55 R 22.5	162 D	AG 20.00	-	595	1232	560	3757	575	STD

km/h - bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1580	1775	2210	2510	2900	3290	3590	3940	4325
65	1735	1950	2425	2755	3185	3610	3945	4325	4750
50	2100	2360	2935	3335	3855	4370	4775	5235	5750
40	2360	2650	3295	3750	4330	4910	5365	5880	6460
25	2740	3080	3830	4355	5030	5705	6230	6830	7505
10	3125	3510	4365	4960	5730	6500	7100	7785	8550

∅ 26.5"

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
600/55 R 26.5	165 D	AG 20.00	-	611	1333	606	4078	625	STD

km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1505	1740	1970	2395	2770	3190	3615	3895	4315	4690
65	1650	1910	2165	2630	3040	3505	3970	4275	4740	5150
50	2000	2310	2620	3180	3680	4240	4805	5180	5740	6235
40	2245	2595	2945	3575	4135	4765	5395	5815	6445	7005
25	2605	3015	3420	4155	4805	5540	6270	6760	7490	8140
10	2970	3435	3895	4730	5470	6305	7140	7695	8530	9270

STD: Standard

Technologies

Steel Belted

Reinforced Bead

High Speed

Performance

Durability

Field Protection

Excellent Flotation

Self-Cleaning

Traction

FL 630 SUPER

∅ 26.5" Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire)

600/55 R 26.5 | 177 D | AG 20.00 | - | 611 | 1333 | 604 | 4104 | 625 | HD

km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	6.0
65	1825	2265	2705	3285	3800	4380	4965	5330	5915	6500	6865	7300
50	2210	2740	3270	3980	4595	5305	6010	6450	7160	7865	8305	8835
40	2485	3080	3675	4470	5165	5960	6755	7250	8045	8840	9335	9930
30	2760	3420	4080	4965	5735	6615	7500	8050	8935	9815	10365	11025
25	2885	3580	4270	5195	6000	6925	7845	8425	9345	10270	10845	11535
10	3285	4075	4865	5915	6835	7885	8940	9595	10645	11695	12355	13140

650/55 R 26.5 | 169 D | AG 20.00 | - | 645 | 1389 | 627 | 4258 | 650 | STD

km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1690	1955	2220	2695	3120	3595	4070	4385	4860	5280
65	1860	2150	2440	2960	3425	3945	4470	4815	5340	5800
50	2250	2600	2950	3585	4145	4775	5410	5830	6460	7020
40	2525	2920	3315	4025	4660	5370	6080	6550	7260	7890
25	2935	3395	3850	4675	5410	6235	7060	7610	8435	9165
10	3345	3865	4385	5385	6160	7100	8040	8670	9605	10440

650/55 R 26.5 | 178 D | AG 20.00 | - | 645 | 1389 | 628 | 4292 | 650 | HD

km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	6.0
65	1875	2325	2775	3375	3900	4500	5100	5475	6075	6675	7050	7500
50	2270	2815	3360	4085	4720	5445	6175	6625	7355	8080	8535	9075
40	2550	3165	3775	4590	5305	6120	6940	7450	8265	9080	9590	10200
30	2835	3515	4195	5100	5890	6795	7705	8270	9175	10080	10650	11325
25	2965	3675	4385	5335	6165	7110	8060	8655	9600	10550	11140	11850
10	3375	4185	4995	6075	7020	8100	9180	9855	10935	12015	126960	13500

650/65 R 26.5 | 174 D | AG 20.00 | - | 645 | 1519 | 684 | 4653 | 725 | STD

km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1955	2260	2565	3115	3600	4150	4700	5065	5615	6100
65	2145	2480	2815	3420	3955	4560	5160	5565	6165	6700
50	2600	3005	3410	4140	4785	5515	6245	6735	7465	8110
40	2920	3375	3830	4650	5380	6200	7020	7570	8390	9115
25	3390	3920	4450	5405	6250	7205	8155	8790	9745	10590
10	3860	4465	5070	6155	7120	8205	9290	10010	11100	12060

710/50 R 26.5 | 170 D | AG 24.00 | AG 20.00 | 727 | 1383 | 626 | 4237 | 650 | STD

km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1745	2020	2290	2780	3220	3710	4200	4525	5015	5450
65	1920	2220	2520	3060	3540	4080	4620	4980	5520	6000
50	2325	2690	3050	3705	4285	4940	5595	6030	6680	7260
40	2615	3025	3430	4165	4815	5550	6285	6775	7510	8160
25	3035	3510	3985	4835	5595	6450	7300	7870	8725	9480
10	3460	4000	4540	5510	6375	7345	8320	8965	9940	10800

750/45 R 26.5 | 170 D | AG 24.00 | - | 754 | 1349 | 606 | 4147 | 650 | STD

km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	1750	1995	2240	2785	3170	3660	4150	4535	4970	5460
65	1920	2190	2460	3060	3480	4020	4560	4980	5460	6000
50	2325	2655	2980	3705	4215	4865	5520	6030	6610	7260
40	2615	2985	3350	4165	4735	5470	6205	6775	7430	8160
25	3035	3465	3890	4835	5500	6355	7205	7870	8630	9480
10	3460	3945	4430	5510	6265	7240	8210	8965	9830	10800

750/60 R 26.5 | 180 D | AG 24.00 | - | 754 | 1574 | 694 | 4800 | 725 | STD

km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
70	2340	2705	3070	3725	4310	4965	5625	6060	6720	7300
65	2560	2960	3360	4080	4720	5440	6160	6640	7360	8000
50	3100	3585	4070	4940	5715	6585	7455	8035	8910	9680
40	3485	4030	4570	5550	6420	7400	8380	9035	10010	10880
25	4045	4680	5310	6450	7460	8600	9735	10495	11630	12640
10	4610	5330	6050	7345	8500	9795	11090	11955	13250	14400

STD: Standard - HD: Heavy Duty

Technologies

Steel Belted

Reinforced Bead

High Speed

Performance

Durability

Field Protection

Excellent Flotation

Self-Cleaning

Traction

FL 630 SUPER

∅ 30.5”	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version		Load capacity (kg/tire)										
												km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
	650/65 R 30.5	176 D	AG 20.00	-	645	1621	734	4976	775	STD		**70**	2070	2395	2720	3300	3815	4400	4980	5370	5950	6465
												65	2275	2630	2985	3625	4190	4830	5470	5895	6535	7100
												50	2755	3185	3610	4385	5075	5845	6620	7135	7910	8595
												40	3095	3580	4060	4930	5700	6570	7440	8020	8890	9660
												25	3595	4155	4715	5725	6620	7630	8640	9315	10325	11220
												10	4090	4730	5370	6520	7545	8695	9845	10610	11760	12780
	750/60 R 30.5	181 D	AG 24.00	-	754	1675	746	5115	800	STD		**km/h - bar**	**0.8**	**1.0**	**1.2**	**1.6**	**2.0**	**2.4**	**2.8**	**3.2**	**3.6**	**4.0**
												70	2405	2780	3155	3835	4435	5110	5785	6235	6910	7510
												65	2640	3055	3465	4210	4870	5610	6355	6850	7590	8250
												50	3200	3700	4195	5095	5895	6790	7690	8290	9190	9985
												40	3595	4155	4715	5725	6620	7630	8640	9315	10325	11220
												25	4175	4825	5475	6650	7695	8865	10040	10820	11995	13035
												10	4755	5500	6240	7575	8765	10100	11435	12330	13665	14850

STD: Standard

Technologies

- Steel Belted
- Reinforced Bead
- High Speed

Performance

- Durability
- Field Protection
- Excellent Flotation
- Self-Cleaning
- Traction



Radial



FL 630 ULTRA

FL 630 ULTRA is a flotation tire suitable for field and road applications with trailers, tankers and spreaders. Its resistant structure provides excellent traction and perfect grip even in bends and when maneuvering. The particular tread design ensures excellent grip on any kind of terrain in addition to enhanced self-cleaning features.

∅ 22.5"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire) km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
	500/60 R 22.5	155 D/166 A8	AG 16.00	15.00 ; 16.00 ; 17.00	503	1172	521	3592	550	STD	**70**	1130	1310	1485	1780	2085	2385	2670	2970	3250	3530
											65	1240	1435	1630	1950	2290	2610	2930	3255	3565	3875
											50	1505	1740	1970	2345	2770	3160	3540	3940	4315	4690
											40	1700	1965	2230	2680	3110	3560	3990	4440	4880	5300
											25	1960	2270	2575	3080	3615	4110	4630	5130	5635	6125
											10	2235	2585	2930	3500	4100	4700	5250	5850	6420	6975
	560/45 R 22.5	152 D/163 A8	AG 16.00	-	543	1076	490	3290	525	STD	**70**	1040	1185	1330	1650	1880	2170	2460	2690	2945	3235
											65	1140	1300	1460	1815	2060	2380	2700	2950	3235	3550
											50	1380	1575	1765	2195	2495	2885	3270	3570	3915	4300
											40	1560	1780	2000	2490	2830	3270	3705	4050	4440	4875
											30	1720	1960	2200	2740	3115	3595	4080	4455	4885	5365
											25	1800	2055	2305	2865	3255	3760	4265	4660	5110	5610
											10	2045	2335	2620	3260	3710	4285	4860	5305	5815	6390
	560/60 R 22.5	161 D/172 A8	AG 16.00	16.00 ; 17.00 ; AG 20.00	543	1244	535	3760	600	STD	**70**	1350	1540	1730	2150	2445	2825	3200	3495	3835	4210
											65	1480	1690	1900	2360	2685	3100	3515	3840	4210	4625
											50	1795	2050	2300	2860	3250	3755	4260	4650	5100	5600
											40	2020	2305	2585	3215	3655	4225	4790	5230	5735	6300
											30	2240	2555	2865	3565	4055	4680	5310	5800	6360	6985
											25	2340	2670	3000	3730	4240	4900	5560	6070	6655	7310
											10	2665	3040	3415	4250	4830	5580	6330	6910	7580	8325
	600/50 R 22.5	159 D/170 A8	AG 20.00	-	611	1172	509	3528	550	STD	**70**	1280	1480	1675	2020	2355	2680	3020	3330	3670	3985
											65	1400	1620	1840	2220	2585	2950	3310	3660	4025	4375
											50	1695	1960	2225	2700	3125	3575	4000	4420	4875	5295
											40	1920	2220	2520	3040	3540	4050	4555	5020	5520	6000
											25	2215	2560	2905	3510	4080	4675	5210	5800	6365	6915
											10	2520	2915	3310	4000	4650	5325	5940	6600	7245	7875
	710/40 R 22.5	161 D/172 A8	AG 24.00	-	727	1140	514	3490	550	STD	**70**	1350	1540	1730	2150	2445	2825	3200	3495	3835	4210
											65	1480	1690	1900	2360	2685	3100	3515	3840	4210	4625
											50	1795	2050	2300	2860	3250	3755	4260	4650	5100	5600
											40	2020	2305	2585	3215	3655	4225	4790	5230	5735	6300
											30	2240	2555	2865	3565	4055	4680	5310	5800	6360	6985
											25	2340	2670	3000	3730	4240	4900	5560	6070	6655	7310
											10	2665	3040	3415	4250	4830	5580	6330	6910	7580	8325

STD: Standard

Technologies

Reinforced Bead

Performance

Reduced Soil Compaction

FL 630 ULTRA

∅ 26.5”	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire) km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
	600/55 R 26.5	165 D/176 A8	AG 20.00	-	611	1333	579	4034	625	STD	**65**	1650	1910	2165	2630	3040	3505	3970	4275	4740	5150
											50	2000	2310	2620	3180	3680	4240	4805	5180	5740	6235
											40	2275	2630	2985	3625	4190	4830	5470	5895	6535	7100
											25	2605	3015	3420	4155	4805	5540	6270	6760	7490	8140
											10	2970	3435	3895	4730	5470	6305	7140	7695	8530	9270
	650/55 R 26.5	169 D/180 A8	AG 20.00	-	645	1389	600	4207	650	STD	**km/h - bar**	**0.8**	**1.0**	**1.2**	**1.6**	**2.0**	**2.4**	**2.8**	**3.2**	**3.6**	**4.0**
											65	1860	2150	2440	2960	3425	3945	4470	4815	5340	5800
											50	2250	2600	2950	3585	4145	4775	5410	5830	6460	7020
											40	2560	2960	3360	4080	4720	5440	6160	6640	7360	8000
											25	2935	3395	3850	4675	5410	6235	7060	7610	8435	9165
											10	3345	3865	4385	5325	6160	7100	8040	8670	9605	10440
	710/50 R 26.5	170 D/181 A8	AG 24.00	AG 20.00	727	1383	599	4208	650	STD	**km/h - bar**	**0.8**	**1.0**	**1.2**	**1.6**	**2.0**	**2.4**	**2.8**	**3.2**	**3.6**	**4.0**
											70	1750	1995	2240	2785	3170	3660	4150	4535	4970	5460
											65	1920	2190	2460	3060	3480	4020	4560	4980	5460	6000
											50	2325	2650	2980	3705	4210	4865	5520	6025	6610	7260
											40	2640	3015	3385	4210	4785	5530	6270	6850	7510	8250
											25	3035	3465	3890	4835	5500	6355	7205	7870	8630	9480
											10	3460	3945	4430	5510	6265	7240	8210	8965	9830	10800
	800/45 R 26.5	174 D/184 A8	AG 28.00	AG 24.00	828	1393	618	4238	675	STD	**km/h - bar**	**0.8**	**1.0**	**1.2**	**1.6**	**2.0**	**2.4**	**2.8**	**3.2**	**3.6**	**4.0**
											70	1955	2230	2505	3115	3540	4090	4640	5065	5555	6100
											65	2145	2450	2750	3420	3890	4490	5095	5565	6100	6700
											50	2600	2965	3330	4140	4705	5435	6165	6735	7385	8110
											40	2880	3285	3690	4590	5220	6030	6840	7470	8190	9000
											30	3240	3695	4150	5165	5870	6785	7695	8400	9210	10120
											25	3390	3870	4345	5405	6145	7100	8050	8790	9640	10590
											10	3860	4405	4945	6155	6995	8085	9170	10010	10975	12060

STD: Standard

Technologies

Reinforced Bead

Performance

Reduced Soil Compaction



Radial



FL 635

FL 635 is a radial flotation tire suitable for both road and field usage. The special block pattern has been designed for grassland/hay baler applications. FL 635 ensures a great pressure distribution on the ground across the footprint and drastically reduces the soil compaction to preserve the value of the crops.

∅ 22.5"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
	620/40 R 22.5	154 D	AG 20.00	-	625	1068	470	3225	500	STD	Load capacity (kg/tire)										
											70	1095	1250	1405	1745	1985	2290	2600	2835	3110	3415
											65	1200	1370	1540	1915	2175	2515	2850	3115	3415	3750
											50	1455	1660	1865	2320	2635	3045	3455	3770	4135	4540
											40	1635	1865	2095	2605	2960	3420	3880	4235	4645	5100
											25	1900	2165	2430	3025	3440	3970	4505	4920	5395	5925
											10	2160	2465	2770	3445	3915	4525	5130	5605	6145	6750
	650/55 R 22.5	167 D	AG 20.00	-	645	1287	568	3901	600	STD	km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
											70	1590	1815	2035	2530	2880	3325	3770	4120	4515	4960
											65	1745	1990	2235	2780	3165	3655	4145	4525	4960	5450
											50	2115	2410	2705	3365	3830	4420	5015	5475	6005	6595
											40	2375	2710	3045	3785	4305	4970	5640	6155	6750	7415
											25	2760	3150	3535	4395	5000	5775	6550	7155	7840	8615
											10	3140	3585	4025	5005	5690	6575	7460	8145	8930	9810
	710/40 R 22.5	161 D	AG 24.00	-	727	1140	510	3467	550	STD	km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
											70	1350	1540	1730	2150	2445	2825	3200	3495	3835	4210
											65	1480	1690	1900	2360	2685	3100	3515	3840	4210	4625
											50	1795	2050	2300	2860	3250	3755	4260	4650	5100	5600
											40	2015	2300	2580	3210	3650	4215	4785	5225	5725	6290
											30	2240	2555	2865	3565	4055	4680	5310	5800	6360	6985
											25	2340	2670	3000	3730	4240	4900	5560	6070	6655	7310
											10	2665	3040	3415	4250	4830	5580	6330	6910	7580	8325
	750/45 R 22.5	168 D	AG 24.00	-	754	1247	555	3810	600	STD	km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
											70	1635	1865	2095	2605	2960	3420	3880	4235	4645	5100
											65	1795	2050	2300	2860	3250	3755	4260	4650	5100	5600
											50	2170	2475	2780	3460	3935	4545	5155	5630	6170	6780
											40	2440	2785	3125	3890	4420	5110	5795	6325	6935	7620
											30	2710	3090	3470	4315	4910	5670	6430	7025	7700	8460
											25	2835	3235	3630	4515	5135	5930	6730	7350	8055	8850
											10	3230	3685	4135	5145	5850	6755	7665	8370	9175	10080

STD: Standard

Technologies

Reinforced Bead

High Speed

Performance

Reduced Soil Compaction

Traction

Self-Cleaning

Durability

FLOTATION

Radial



FL 637

FL 637 is a radial flotation tire suitable for spreaders, trailers and tankers. The steel-belted structure provides enhanced durability and higher load capacity. In addition to excellent flotation features, this tire shows low rolling resistance and outstanding self-cleaning properties. The directional tread design ensures excellent traction.

∅ 17"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version		Load capacity (kg/tire) km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0
	520/50 R 17	151D/148E	16.00	-	516	952	414	2895	450	STD		70	915	1170	1420	1610	1860	2115	2335	2555	2805	3150
												65	1005	1280	1555	1760	2040	2315	2555	2795	3075	3450
												50	1215	1545	1880	2130	2465	2800	3090	3385	3720	4175
												40	1365	1740	2115	2395	2775	3150	3475	3805	4180	4695
												30	1515	1930	2345	2660	3075	3495	3860	4225	4640	5210
												25	1585	2020	2455	2785	3220	3655	4040	4420	4855	5455
												10	1805	2300	2795	3170	3665	4165	4600	5035	5530	6210

STD: Standard

Technologies

- Reinforced Bead
- High Speed

Performance

- Reduced Soil Compaction
- Traction
- Self-Cleaning
- Durability



Radial



FL 639

FL 639 is a field-oriented flotation radial tire also suitable for spreading applications. Its wide footprint area ensures low soil compaction resulting in increased crop productivity. The reinforced bead and the sidewall protection contribute to an extended tire life-cycle.

∅ 22.5"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire) km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
	560/45 R 22.5	152 D/163 A8	AG 16.00	-	543	1076	484	3303	525	STD	**70**	1040	1200	1360	1620	1910	2170	2430	2720	2980	3235
											65	1140	1320	1495	1790	2095	2380	2700	2960	3270	3550
											50	1380	1595	1810	2150	2540	2900	3240	3615	3960	4300
											40	1560	1805	2050	2450	2880	3270	3675	4090	4485	4875
											25	1800	2080	2360	2820	3310	3775	4230	4700	5165	5610
											10	2045	2365	2685	3200	3775	4300	4820	5350	5880	6390
	600/50 R 22.5	159 D/170 A8	AG 20.00	-	611	1172	521	3592	550	STD	**km/h - bar**	**0.8**	**1.0**	**1.2**	**1.6**	**2.0**	**2.4**	**2.8**	**3.2**	**3.6**	**4.0**
											70	1280	1480	1675	2020	2355	2680	3020	3330	3670	3985
											65	1400	1620	1840	2220	2585	2950	3310	3660	4025	4375
											50	1695	1960	2225	2700	3125	3575	4000	4420	4875	5295
											40	1920	2220	2520	3040	3540	4050	4555	5020	5520	6000
											25	2215	2560	2905	3510	4080	4675	5210	5800	6365	6915
											10	2520	2915	3310	4000	4650	5325	5940	6600	7245	7875
	600/50 R 22.5	168 B/156 B	AG 20.00	-	611	1172	521	3592	550	STD	**km/h - bar**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**	**1.8**	**2.0**	**2.2**	**2.4**	**2.6**	**2.8**	**3.0**	**3.2**
											50 FR	2180	2490	2800	3125	3450	3725	4000	4310	4625	4885	5150	5375	5600
											50 DW	1550	1775	2000	2215	2430	2615	2800	3025	3250	3450	3650	3825	4000
	710/40 R 22.5	161 D/172 A8	AG 24.00	-	727	1140	503	3492	550	STD	**km/h - bar**	**0.8**	**1.0**	**1.2**	**1.6**	**2.0**	**2.4**	**2.8**	**3.2**	**3.6**	**4.0**
											70	1350	1560	1770	2150	2485	2865	3245	3495	3875	4210
											65	1480	1715	1945	2360	2730	3145	3565	3840	4255	4625
											50	1795	2075	2355	2860	3305	3810	4315	4650	5155	5600
											40	2015	2330	2645	3210	3715	4280	4845	5225	5790	6290
											25	2340	2710	3075	3730	4315	4975	5630	6070	6730	7310
											10	2665	3085	3500	4250	4915	5665	6415	6910	7660	8325
	710/40 R 22.5	170 B/158 B	AG 24.00	-	727	1140	503	3492	550	STD	**km/h - bar**	**0.8**	**1.0**	**1.2**	**1.4**	**1.6**	**1.8**	**2.0**	**2.2**	**2.4**	**2.6**	**2.8**	**3.0**	**3.2**
											50 FR	2300	2650	3000	3325	3650	3950	4250	4560	4875	5235	5600	5800	6000
											50 DW	1650	1885	2120	2345	2575	2785	3000	3225	3450	3725	4000	4125	4250
∅ 26.5"	**850/40 R 26.5**	173 D / 184 A8	AG 28.00	-	860	1355	599	4122	.	STD	**km/h - bar**	**0.8**	**1.2**	**1.6**	**2.0**	**2.4**	**2.8**	**3.2**	**3.6**	**4.0**
											70	1895	2430	3020	3435	3965	4500	4910	5385	5915
											65	2080	2665	3315	3770	4355	4940	5395	5915	6500
											50	2520	3225	4015	4565	5270	5980	6530	7160	7865
											40	2880	3690	4590	5220	6030	6840	7470	8190	9000
											30	3145	4025	5010	5695	6580	7460	8150	8935	9815
											25	3290	4215	5240	5960	6885	7810	8525	9350	10270
											10	3745	4800	5970	6790	7840	8895	9715	10650	11700

STD: Standard

Technologies

Reinforced Bead

High Speed

Performance

Reduced Soil Compaction

Traction

Self-Cleaning

Durability

Bias



FLOTATION 351

FLOTATION 351 is a bias flotation tire which best suits transport applications using trailers. Extra deep lugs provide outstanding traction and a longer tire life. FLOTATION 351 is the ideal tire on wet and moist surfaces and helps to improve the productivity of today's farming businesses.

∅ 20"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	3.10
	42 X 25.00 - 20	20.50 HF	20.50 VF	605	1110	508	3302	STD	12	TL	135 B		50	2180
	42 X 25.00 - 20	20.50 HF	20.50 VF	605	1110	508	3302	STD	16	TL	139 B		km/h - bar	3.70
													50	2430
	48 X 25.00 - 20	20.50 HF	20.50 VF	630	1270	559	3785	STD	10	TL	144 B		km/h - bar	2.40
													50	2800
	48 X 31.00 - 20	26.00 HF	26.00 VF	775	1283	559	3886	STD	12	TL	148 B		km/h - bar	2.70
													50	3150
∅ 25"	66 X 43.00 - 25	36.0 TH	-	1020	1750	782	5213	STD	6	TL	-		km/h - bar	1.0
													50	3350
	66 X 43.00 - 25	36.0 TH	-	1020	1750	782	5213	STD	10	TL	160 B		km/h - bar	1.70
													50	4500
	66 X 43.00 - 25	36.0 TH	-	1020	1750	782	5213	STD	16	TL	170 B		km/h - bar	2.80
													50	6000

STD: Standard


Performance

High Load Capacity

Durability

Traction

Bias



FLOTATION 558

FLOTATION 558 is a cross-ply flotation tire suitable for hay harvesters/balers, implement machinery and trailers both on and off the road. It is particularly recommended on muddy grounds and whenever traction and high flotation are essential for good soil tillage.

∅ 22.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling
	400/55 - 22.5	AG 11.75	12.25 ; 13.00 ; AG 13.00	405	1020	445	3084	STD	14	TL	138 A8/134 B	150 A8/146 B
	400/55 - 22.5	AG 11.75	12.25 ; 13.00 ; AG 13.00	405	1020	445	3084	STD	16	TL	140 A8/136 B	152 A8/148 B
	400/55 - 22.5	AG 11.75	12.25 ; 13.00 ; AG 13.00	405	1020	445	3084	AB HD	16	TL	140 A8/136 B	152 A8/148 B

Load capacity (kg/tire)

km/h - bar	3.00	3.20	3.50
10 FR	4285	4450	4690
20 FR	3855	4005	4220
30 FR	3425	3560	3750
40 FR	3060	3180	3350
50 FR	2755	2860	3000
10 DW	3015	3135	3305
20 DW	2715	2820	2975
30 DW	2415	2510	2645
40 DW	2155	2240	2360
50 DW	1940	2015	2120

km/h - bar	3.70	3.80	4.00
10 FR	4745	4825	4970
20 FR	4270	4340	4475
30 FR	3795	3860	3975
40 FR	3390	3445	3550
50 FR	3050	3100	3150
10 DW	3345	3395	3500
20 DW	3010	3055	3150
30 DW	2675	2715	2800
40 DW	2390	2425	2500
50 DW	2150	2185	2240

km/h - bar	3.70	3.80	4.00
10 FR	4745	4825	4970
20 FR	4270	4340	4475
30 FR	3795	3860	3975
40 FR	3390	3445	3550
50 FR	3050	3100	3150
10 DW	3345	3395	3500
20 DW	3010	3055	3150
30 DW	2675	2715	2800
40 DW	2390	2425	2500
50 DW	2150	2185	2240

STD: Standard - AB HD: Aramid Belted HD

Performance

High Load Capacity

Durability

Traction

FLOTATION 558

∅ 22.5" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	
400/55 - 22.5	AG 11.75	12.25; 13.00; AG 13.00	405	1020	445	3084	STD	20	TL	144 A8/140 B	156 A8/152 B	

Load capacity (kg/tire)			
km/h - bar	4.60	4.80	5.00
10 FR	5335	5465	5600
20 FR	4800	4920	5040
30 FR	4265	4375	4480
40 FR	3810	3905	4000
50 FR	3430	3515	3550
10 DW	3730	3830	3920
20 DW	3360	3445	3530
30 DW	2985	3065	3135
40 DW	2665	2735	2800
50 DW	2400	2460	2500

∅ 22.5" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	
500/45 - 22.5	AG 16.00	-	500	1045	471	3167	STD	12	TL	136 A8/132 B	148 A8/144 B	

Load capacity (kg/tire)			
km/h - bar	2.30	2.50	2.70
10 FR	4020	4215	4410
20 FR	3615	3795	3970
30 FR	3215	3370	3530
40 FR	2870	3010	3150
50 FR	2585	2710	2800
10 DW	2855	2995	3135
20 DW	2570	2695	2820
30 DW	2285	2395	2510
40 DW	2040	2140	2240
50 DW	1835	1925	2000

∅ 22.5" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	
500/45 - 22.5	AG 16.00	-	500	1045	471	3167	STD	16	TL	142 A8/138 B	154 A8/150 B	

Load capacity (kg/tire)			
km/h - bar	3.20	3.40	3.60
10 FR	4900	5075	5250
20 FR	4410	4570	4725
30 FR	3920	4060	4200
40 FR	3500	3625	3750
50 FR	3150	3265	3350
10 DW	3465	3590	3710
20 DW	3120	3230	3340
30 DW	2770	2875	2970
40 DW	2475	2565	2650
50 DW	2230	2310	2360

∅ 22.5" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	
500/45 - 22.5	AG 16.00	-	500	1045	471	3167	AB HD	16	TL	142 A8/138 B	154 A8/150 B	

Load capacity (kg/tire)			
km/h - bar	3.20	3.40	3.60
10 FR	4900	5075	5250
20 FR	4410	4570	4725
30 FR	3920	4060	4200
40 FR	3500	3625	3750
50 FR	3150	3265	3350
10 DW	3465	3590	3710
20 DW	3120	3230	3340
30 DW	2770	2875	2970
40 DW	2475	2565	2650
50 DW	2230	2310	2360

STD: Standard - AB HD: Aramid Belted HD

Performance

High Load Capacity

Durability

Traction

FLOTATION 558

∅ 22.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	4.30	4.40	4.50
	500/45 - 22.5	AG 16.00	-	500	1045	471	3167	STD	20	TL	146 A8/142 B	158 A8/154 B		10 FR	5795	5875	5950
														20 FR	5215	5285	5355
														30 FR	4635	4700	4760
														40 FR	4140	4195	4250
														50 FR	3725	3775	3750
														10 DW	4090	4145	4200
														20 DW	3680	3730	3780
														30 DW	3270	3315	3360
														40 DW	2920	2960	3000
														50 DW	2630	2665	2650

STD: Standard

Performance

High Load Capacity

Durability

Traction



Bias



FLOTATION 647

FLOTATION 647 is an implement tire that features best traction on soft soil and grassland. In addition to excellent self-cleaning properties, the specially designed tread pattern provides a wide contact area, which ensures optimized ground pressure and excellent performance on soft soil.

∅ 15.3"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	5.50
	260/75 - 15.3	9.00	-	275	785	363	2380	STD	-	TL	119 A8	131 A8	40 FR	1950
													40 DW	1360

∅ 17"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	4.00
	520/50 - 17	AG 16.00	-	516	965	426	2907	STD	-	TL	147 B	159 B	50 FR	4375
													50 DW	3075

∅ 18"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	3.50
	425/70 -18	13.00	-	435	1065	-	-	STD	-	TL	143 B	155 B	50 FR	3875
													50 DW	2725

STD: Standard

Performance

Traction

Self-Cleaning



Bias



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.

∅ 17"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling
	500/50 - 17	AG 16.00	-	510	945	416	2750	STD	10	TL	128 A8/124 B	140 A8/136 B
	500/50 - 17	AG 16.00	-	510	945	416	2750	STD	14	TL	137 A8/133 B	149 A8/145 B
	500/50 - 17	AG 16.00	-	510	945	416	2750	STD	16	TL	139 A8/135 B	152 A8/148 B

Load capacity (kg/tire)

km/h - bar	1.50	1.70	2.00
10 FR	2960	3185	3500
20 FR	2665	2865	3150
30 FR	2370	2550	2800
40 FR	2115	2275	2500
50 FR	1905	2050	2240
10 DW	2130	2290	2520
20 DW	1915	2060	2270
30 DW	1700	1830	2015
40 DW	1520	1635	1800
50 DW	1370	1470	1600

km/h - bar	2.20	2.40	2.80
10 FR	3950	4160	4550
20 FR	3555	3740	4095
30 FR	3160	3325	3640
40 FR	2820	2970	3250
50 FR	2540	2675	2900
10 DW	2795	2940	3220
20 DW	2515	2645	2900
30 DW	2235	2350	2575
40 DW	1995	2100	2300
50 DW	1795	1890	2060

km/h - bar	3.00	3.10	3.20
10 FR	4790	4880	4970
20 FR	4310	4390	4475
30 FR	3830	3905	3975
40 FR	3420	3485	3550
50 FR	3080	3135	3150
10 DW	3275	3340	3400
20 DW	2950	3005	3060
30 DW	2620	2670	2720
40 DW	2340	2385	2430
50 DW	2105	2145	2180

STD: Standard

Technologies

Heavy Duty

Reinforced Carcass

High Speed

Performance

High Load Capacity

Durability

Reduced Soil Compaction

Traction

FLOTATION 648

∅ 17”

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire)			
												km/h - bar	3.80	3.90	4.00
500/50 - 17	AG 16.00	-	510	945	416	2750	STD	18	TL	145 A8/141 B	157 A8/154 B	10 FR	5605	5690	5775
												20 FR	5045	5120	5200
												30 FR	4485	4555	4620
												40 FR	4005	4065	4125
												50 FR	3605	3660	3750
												10 DW	3940	3995	4060
												20 DW	3545	3595	3655
												30 DW	3155	3200	3250
												40 DW	2815	2855	2900
												50 DW	2535	2570	2575

∅ 20”

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire)			
												km/h - bar	2.00	2.20	2.40	
500/55 - 20	16.00	-	508	1058	458	3153	STD	12	TL	138 A8/134 B	150 A8/146 B	10 FR	4215	4460	4690	
												20 FR	3795	4015	4220	
												30 FR	3370	3565	3750	
												40 FR	3010	3185	3350	
												50 FR	2710	2865	3000	
												10 DW	2970	3145	3305	
												20 DW	2670	2830	2975	
												30 DW	2375	2515	2645	
												40 DW	2120	2245	2360	
												50 DW	1910	2020	2120	

∅ 22.5”

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire)			
												km/h - bar	2.00	3.00	4.00	5.00
350/65 - 22.5	AG 11.75	-	358	1030	451	3069	STD	18	TL	139 A8/135 B	151 A8/147 B	10 FR	2830	3585	4240	4830
												20 FR	2545	3225	3820	4345
												30 FR	2260	2865	3395	3865
												40 FR	2020	2560	3030	3450
												50 FR	1820	2305	2725	3075
												10 DW	1990	2520	2990	3400
												20 DW	1790	2270	2690	3060
												30 DW	1590	2015	2390	2720
												40 DW	1420	1800	2135	2430
												50 DW	1280	1620	1920	2180

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire)		
												km/h - bar	1.50	2.50	3.50
385/65 - 22.5	AG 11.75	-	400	1070	475	3233	STD	16	TL	144 A8/140 B	156 A8/152 B	10 FR	3410	4600	5600
												20 FR	3070	4140	5040
												30 FR	2725	3680	4480
												40 FR	2435	3285	4000
												50 FR	2190	2955	3550
												10 DW	2385	3220	3920
												20 DW	2150	2900	3530
												30 DW	1910	2575	3135
												40 DW	1705	2300	2800
												50 DW	1535	2070	2500

STD: Standard

Technologies

Heavy Duty

Reinforced Carcass

High Speed

Performance

High Load Capacity

Durability

Reduced Soil Compaction

Traction

FLOTATION 648

∅ 22.5" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	3.80	4.00	4.30
385/65 - 22.5	AG 11.75	-	400	1070	475	3233	STD	18	TL	148 A8/144 B	160 A8/ 156 B	**10 FR**	5860	6040	6300
												20 FR	5275	5435	5670
												30 FR	4685	4835	5040
												40 FR	4185	4315	4500
												50 FR	3765	3885	4000
												10 DW	4100	4230	4410
												20 DW	3690	3805	3970
												30 DW	3280	3380	3530
												40 DW	2930	3020	3150
												50 DW	2635	2720	2800

												km/h - bar	5.30	5.60	5.90
385/65 - 22.5	AG 11.75	-	400	1070	475	3233	STD	22	TL	155 A8/151 B	167 A8/163 B	**10 FR**	7170	7400	7630
												20 FR	6450	6660	6865
												30 FR	5735	5920	6105
												40 FR	5120	5285	5450
												50 FR	4610	4755	4875
												10 DW	5095	5265	5425
												20 DW	4585	4740	4885
												30 DW	4075	4210	4340
												40 DW	3640	3760	3875
												50 DW	3275	3385	3450

												km/h - bar	1.50	2.50	3.50
400/60 - 22.5	AG 11.75	-	400	1070	475	3233	STD	16	TL	144 A8/140 B	156 A8/152 B	**10 FR**	3410	4600	5600
												20 FR	3070	4140	5040
												30 FR	2725	3680	4480
												40 FR	2435	3285	4000
												50 FR	2190	2955	3550
												10 DW	2385	3220	3920
												20 DW	2150	2900	3530
												30 DW	1910	2575	3135
												40 DW	1705	2300	2800
												50 DW	1535	2070	2500

												km/h - bar	3.80	4.00	4.30
400/60 - 22.5	AG 11.75	-	400	1070	475	3233	STD	18	TL	148 A8/144 B	160 A8/ 156 B	**10 FR**	5860	6040	6300
												20 FR	5275	5435	5670
												30 FR	4685	4835	5040
												40 FR	4185	4315	4500
												50 FR	3765	3885	4000
												10 DW	4100	4230	4410
												20 DW	3690	3805	3970
												30 DW	3280	3380	3530
												40 DW	2930	3020	3150
												50 DW	2635	2720	2800

STD: Standard

Technologies

- Heavy Duty
- Reinforced Carcass
- High Speed

Performance

- High Load Capacity
- Durability
- Reduced Soil Compaction
- Traction

FLOTATION 648

∅ 22.5" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	5.30	5.60	5.90
400/60 - 22.5	AG 11.75	-	400	1070	475	3233	STD	22	TL	155 A8/151 B	167 A8/163 B	10 FR	7170	7400	7630
												20 FR	6450	6660	6865
												30 FR	5735	5920	6105
												40 FR	5120	5285	5450
												50 FR	4610	4755	4875
												10 DW	5095	5265	5425
												20 DW	4585	4740	4885
												30 DW	4075	4210	4340
												40 DW	3640	3760	3875
												50 DW	3275	3385	3450

												km/h - bar	1.50	2.00	2.20
500/50 - 22.5	AG 16.00	-	500	1070	475	3200	STD	12	TL	140 A8/136 B	152 A8/148 B	10 FR	3970	4695	4970
												20 FR	3570	4225	4475
												30 FR	3175	3760	3975
												40 FR	2835	3355	3550
												50 FR	2550	3020	3150
												10 DW	2800	3310	3500
												20 DW	2520	2980	3150
												30 DW	2240	2650	2800
												40 DW	2000	2365	2500
												50 DW	1800	2130	2240

												km/h - bar	2.60	2.80	3.00
500/50 - 22.5	AG 16.00	-	500	1070	475	3200	STD	16	TL	146 A8/142 B	158 A8/155 B	10 FR	5475	5710	5950
												20 FR	4925	5140	5355
												30 FR	4380	4570	4760
												40 FR	3910	4080	4250
												50 FR	3520	3670	3875
												10 DW	3865	4030	4200
												20 DW	3480	3630	3780
												30 DW	3090	3225	3360
												40 DW	3760	2880	3000
												50 DW	2485	2590	2650

												km/h - bar	3.40	3.60	3.80
500/50 - 22.5	AG 16.00	-	500	1070	475	3200	STD	20	TL	151 A8/147 B	163 A8/159 B	10 FR	6400	6615	6825
												20 FR	5760	5955	6145
												30 FR	5120	5290	5460
												40 FR	4570	4725	4875
												50 FR	4115	4255	4375
												10 DW	4530	4685	4830
												20 DW	4075	4215	4345
												30 DW	3625	3745	3865
												40 DW	3235	3345	3450
												50 DW	2910	3010	3075

STD: Standard

Technologies

Heavy Duty

Reinforced Carcass

High Speed

Performance

High Load Capacity

Durability

Reduced Soil Compaction

Traction

FLOTATION 648

∅ 22.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	1.50	2.00	2.40
	500/60 - 22.5	AG 16.00	15.00 ; 17.00	500	1170	510	3489	STD	12	TL	145 A8/142 B	157 A8/154 B	10 FR	4390	5195	5775
													20 FR	3950	4675	5200
													30 FR	3510	4155	4620
													40 FR	3135	3710	4125
													50 FR	2820	3340	3750
													10 DW	3085	3645	4060
													20 DW	2780	3280	3655
													30 DW	2470	2920	3250
													40 DW	2205	2605	2900
													50 DW	1985	2345	2650

													km/h - bar	2.80	3.00	3.20
	500/60 - 22.5	AG 16.00	15.00 ; 17.00	500	1170	510	3489	STD	16	TL	151 A8/148 B	163 A8/159 B	10 FR	6315	6575	6825
													20 FR	5685	5915	6145
													30 FR	5050	5260	5460
													40 FR	4510	4695	4875
													50 FR	4060	4225	4375
													10 DW	4465	4650	4830
													20 DW	4020	4185	4345
													30 DW	3575	3720	3865
													40 DW	3190	3320	3450
													50 DW	2870	2990	3150

													km/h - bar	3.40	3.50	3.60
	500/60 - 22.5	AG 16.00	15.00 ; 17.00	500	1170	510	3489	STD	18	TL	153 A8/149 B	165 A8/161 B	10 FR	6970	7090	7210
													20 FR	6275	6380	6940
													30 FR	5580	5675	5770
													40 FR	4980	5065	5150
													50 FR	4480	4560	4625
													10 DW	4940	5025	5110
													20 DW	4450	4525	4600
													30 DW	3955	4020	4090
													40 DW	3530	3590	3650
													50 DW	3175	3230	3250

													km/h - bar	2.40	2.60	2.80
	550/45 - 22.5	AG 16.00	-	550	1070	475	3203	STD	16	TL	147 A8/144 B	159 A8/156 B	10 FR	5600	5865	6125
													20 FR	5040	5280	5515
													30 FR	4480	4695	4900
													40 FR	4000	4190	4375
													50 FR	3600	3770	4000
													10 DW	3935	4125	4305
													20 DW	3540	3710	3875
													30 DW	3145	3300	3445
													40 DW	2810	2945	3075
													50 DW	2530	2650	2800

STD: Standard

Technologies

Heavy Duty

Reinforced Carcass

High Speed

Performance

High Load Capacity

Durability

Reduced Soil Compaction

Traction

FLOTATION 648

∅ 22.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling
	550/45 - 22.5	AG 16.00	-	550	1070	475	3203	STD	20	TL	154 A8/150 B	166 A8/162 B
	550/60 - 22.5	AG 16.00	-	550	1240	540	3725	STD	12	TL	148 A8/144 B	160 A8/156 B
	550/60 - 22.5	AG 16.00	-	550	1240	540	3725	STD	18	TL	156 A8/152 B	169 A8/165 B
	550/60 - 22.5	AG 16.00	-	550	1240	540	3725	STD	20	TL	158 A8/154 B	171 A8/167 B

Load capacity (kg/tire)

km/h - bar	3.00	3.50	4.00
10 FR	6270	6860	7420
20 FR	5645	6175	6680
30 FR	5020	5490	5935
40 FR	4480	4900	5300
50 FR	4030	4410	4750
10 DW	4440	4860	5250
20 DW	3995	4370	4725
30 DW	3550	3885	4200
40 DW	3170	3470	3750
50 DW	2855	3125	3350

km/h - bar	1.50	1.80	2.10
10 FR	5175	5755	6300
20 FR	4655	5180	5670
30 FR	4140	4605	5040
40 FR	3695	4110	4500
50 FR	3325	3700	4000
10 DW	3620	4030	4410
20 DW	3255	3630	3970
30 DW	2895	3225	3530
40 DW	2585	2880	3150
50 DW	2325	2590	2800

km/h - bar	3.00	3.10	3.20
10 FR	7820	7975	8120
20 FR	7035	7175	7310
30 FR	6255	6380	6495
40 FR	5585	5695	5800
50 FR	5025	5125	5150
10 DW	5390	5495	5600
20 DW	4850	4945	5040
30 DW	4310	4395	4480
40 DW	3850	3925	4000
50 DW	3465	3535	3550

km/h - bar	3.30	3.40	3.50
10 FR	8315	8465	8610
20 FR	7485	7615	7750
30 FR	6655	6770	6890
40 FR	5940	6045	6150
50 FR	5345	5440	5450
10 DW	5745	5850	5950
20 DW	5170	5265	5355
30 DW	4600	4680	4760
40 DW	4105	4180	4250
50 DW	3625	3685	3750

STD: Standard

Technologies

Heavy Duty

Reinforced Carcass

High Speed

Performance

High Load Capacity

Durability

Reduced Soil Compaction

Traction

FLOTATION 648

∅ 22.5" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	km/h - bar	Load capacity (kg/tire) 3.30	3.40	3.50
550/60 - 22.5	AG 16.00	-	550	1240	540	3725	DB	20	TL	158 A8/154 B	171 A8/167 B	**10 FR**	8315	8465	8610
												20 FR	7485	7615	7750
												30 FR	6655	6770	6890
												40 FR	5940	6045	6150
												50 FR	5345	5440	5450
												10 DW	5745	5850	5950
												20 DW	5170	5265	5355
												30 DW	4600	4680	4760
												40 DW	4105	4180	4250
												50 DW	3625	3685	3750

												km/h - bar	1.50	1.70	2.00
600/50 - 22.5	AG 20.00	-	600	1170	510	3501	STD	12	TL	147 A8/144 B	159 A8/156 B	**10 FR**	5175	5570	6125
												20 FR	4655	5015	5515
												30 FR	4140	4460	4900
												40 FR	3695	3980	4375
												50 FR	3325	3580	4000
												10 DW	3640	3915	4305
												20 DW	3275	3520	3875
												30 DW	2910	3130	3445
												40 DW	2600	2795	3075
												50 DW	2340	2515	2800

												km/h - bar	2.20	2.40	2.60
600/50 - 22.5	AG 20.00	-	600	1170	510	3501	STD	16	TL	153 A8/149 B	165 A8/161 B	**10 FR**	6540	6880	7210
												20 FR	5885	6195	6490
												30 FR	5230	5505	5770
												40 FR	4670	4915	5150
												50 FR	4205	4425	4625
												10 DW	4635	4880	5110
												20 DW	4170	4390	4600
												30 DW	3705	3905	4090
												40 DW	3310	3485	3650
												50 DW	2980	3135	3250

												km/h - bar	2.70	2.80	2.90
600/50 - 22.5	AG 20.00	-	600	1170	510	3501	STD	18	TL	155 A8/151 B	167 A8/163 B	**10 FR**	7315	7475	7630
												20 FR	6585	6730	6865
												30 FR	5850	5980	6105
												40 FR	5225	5340	5450
												50 FR	4705	4805	4875
												10 DW	5200	5315	5425
												20 DW	4680	4780	4885
												30 DW	4160	4250	4340
												40 DW	3715	3795	3875
												50 DW	3345	3415	3450

STD: Standard - DB: Dual Bead

Technologies

- Heavy Duty
- Reinforced Carcass
- High Speed

Performance

- High Load Capacity
- Durability
- Reduced Soil Compaction
- Traction

FLOTATION 648

∅ 22.5" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	3.00	3.10	3.20
600/50 - 22.5	AG 20.00	-	600	1170	510	3501	DB	20	TL	156 A8/152 B	169 A8/165 B	10 FR	7820	7975	8120
												20 FR	7035	7175	7310
												30 FR	6255	6380	6495
												40 FR	5585	5695	5800
												50 FR	5025	5125	5150
												10 DW	5390	5495	5600
												20 DW	4850	4945	5040
												30 DW	4310	4395	4480
												40 DW	3850	3925	4000
												50 DW	3465	3535	3550

												km/h - bar	1.50	1.70	2.00
600/55 - 22.5	AG 20.00	-	600	1230	540	3716	STD	12	TL	151 A8/ 148 B	164 A8/160 B	10 FR	5915	6365	7000
												20 FR	5325	5725	6300
												30 FR	4730	5090	5600
												40 FR	4225	4545	5000
												50 FR	3805	4090	4500
												10 DW	4080	4390	4830
												20 DW	3675	3950	4345
												30 DW	3265	3510	3865
												40 DW	2915	3135	3450
												50 DW	2625	2820	3150

												km/h - bar	2.20	2.40	2.60
600/55 - 22.5	AG 20.00	-	600	1230	540	3716	STD	16	TL	156 A8/153 B	169 A8/166 B	10 FR	7365	7750	8120
												20 FR	6630	6975	7310
												30 FR	5890	6200	6495
												40 FR	5260	5535	5800
												50 FR	4735	4980	5300
												10 DW	5080	5340	5600
												20 DW	4575	4805	5040
												30 DW	4065	4275	4480
												40 DW	3630	3815	4000
												50 DW	3265	3435	3650

												km/h - bar	3.00	3.10	3.20
600/55 - 22.5	AG 20.00	-	600	1230	540	3716	DB	20	TL	160 A8/156 B	173 A8/169 B	10 FR	8765	8930	9100
												20 FR	7890	8040	8190
												30 FR	7010	7145	7280
												40 FR	6260	6380	6500
												50 FR	5635	5740	5800
												10 DW	6070	6180	6300
												20 DW	5460	5565	5670
												30 DW	4855	4945	5040
												40 DW	4335	4415	4500
												50 DW	3900	3975	4000

STD: Standard - DB: Dual Bead

Technologies

Heavy Duty

Reinforced Carcass

High Speed

Performance

High Load Capacity

Durability

Reduced Soil Compaction

Traction

FLOTATION 648

∅ 22.5" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	1.50	1.60	1.70
700/40 - 22.5	AG 24.00	-	700	1170	510	3537	STD	12	TL	148 A8/144 B	160 A8/ 157 B	10 FR	5850	6085	6300
												20 FR	5265	5475	5670
												30 FR	4680	4865	5040
												40 FR	4180	4345	4500
												50 FR	3760	3910	4125
												10 DW	4100	4255	4410
												20 DW	3690	3830	3970
												30 DW	3280	3405	3530
												40 DW	2930	3040	3150
												50 DW	2635	2735	2800

												km/h - bar	1.80	2.00	2.20
700/40 - 22.5	AG 24.00	-	700	1170	510	3537	STD	16	TL	154 A8/150 B	166 A8/ 162 B	10 FR	6600	7020	7420
												20 FR	5940	6320	6680
												30 FR	5280	5615	5935
												40 FR	4715	5015	5300
												50 FR	4245	4515	4750
												10 DW	4670	4965	5250
												20 DW	4200	4465	4725
												30 DW	3735	3970	4200
												40 DW	3335	3545	3750
												50 DW	3000	3190	3350

												km/h - bar	2.80	3.00	3.20
700/40 - 22.5	AG 24.00	-	700	1170	510	3537	HD	18	TL	160 A8/156 B	173 A8/169 B	10 FR	8415	8765	9100
												20 FR	7575	7890	8190
												30 FR	6730	7010	7280
												40 FR	6010	6260	6500
												50 FR	5410	5635	5800
												10 DW	5825	6070	6300
												20 DW	5240	5460	5670
												30 DW	4660	4855	5040
												40 DW	4160	4335	4500
												50 DW	3745	3900	4000

												km/h - bar	1.50	1.60	1.80
700/50 - 22.5	24.00	-	700	1270	550	3775	STD	12	TL	156 A8/153 B	168 A8/164 B	10 FR	7050	7315	7840
												20 FR	6345	6585	7055
												30 FR	5640	5850	6270
												40 FR	5035	5225	5600
												50 FR	4530	4705	5000
												10 DW	5035	5230	5600
												20 DW	4530	4705	5040
												30 DW	4025	4185	4480
												40 DW	3595	3735	4000
												50 DW	3235	3360	3650

STD: Standard - HD: Heavy Duty

Technologies

Heavy Duty

Reinforced Carcass

High Speed

Performance

High Load Capacity

Durability

Reduced Soil Compaction

Traction

FLOTATION 648

∅ 22.5”

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling
700/50 - 22.5	24.00	-	700	1270	550	3775	STD	16	TL	162 A8/158 B	174 A8/170 B

km/h - bar	2.00	2.20	2.40
10 FR	8430	8910	9380
20 FR	7585	8020	8440
30 FR	6740	7130	7505
40 FR	6020	6365	6700
50 FR	5420	5730	6000
10 DW	5980	6320	6650
20 DW	5380	5690	5985
30 DW	4780	5055	5320
40 DW	4270	4515	4750
50 DW	3845	4065	4250

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling
700/50 - 22.5	24.00	-	700	1270	550	3775	HS	16	TL	158 B/154 E	170 B/166 E

km/h - bar	2.00	2.20	2.40
10 FR	8430	8910	9380
20 FR	7585	8020	8440
30 FR	6740	7130	7505
40 FR	6020	6365	6700
50 FR	5420	5730	6000
70 FR	4755	5030	5300
10 DW	5980	6320	6650
20 DW	5380	5690	5985
30 DW	4780	5055	5320
40 DW	4270	4515	4750
50 DW	3845	4065	4250
70 DW	3375	3565	3750

∅ 26.5”

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling
600/55 - 26.5	AG 20.00	-	600	1354	581	4017	STD	12	TL	153 A8/149 B	165 A8/161 B

km/h - bar	1.50	1.80	2.00
10 FR	6090	6775	7210
20 FR	5480	6100	6490
30 FR	4870	5420	5770
40 FR	4350	4840	5150
50 FR	3915	4355	4625
10 DW	4320	4800	5110
20 DW	3885	4320	4600
30 DW	3455	3840	4090
40 DW	3085	3430	3650
50 DW	2775	3085	3250

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling
600/55 - 26.5	AG 20.00	-	600	1354	581	4017	STD	16	TL	159 A8/156 B	170 A8/167 B

km/h - bar	2.20	2.40	2.60
10 FR	7615	8015	8400
20 FR	6855	7215	7560
30 FR	6095	6410	6720
40 FR	5440	5725	6000
50 FR	4895	5155	5450
10 DW	5560	5845	6125
20 DW	5000	5260	5515
30 DW	4445	4675	4900
40 DW	3970	4175	4375
50 DW	3575	3760	4000

STD: Standard - HS: High Speed

Technologies

- Heavy Duty
- Reinforced Carcass
- High Speed

Performance

- High Load Capacity
- Durability
- Reduced Soil Compaction
- Traction

FLOTATION 648

∅ 26.5" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling
600/55 - 26.5	AG 20.00	-	600	1354	581	4017	STD	18	TL	160 A8/157 B	172 A6/169 B
700/50 - 26.5	24.00	-	700	1354	581	4017	STD	12	TL	157 A8/154 B	169 A8/165 B
700/50 - 26.5	24.00	-	700	1354	581	4017	STD	16	TL	162 A8/158 B	174 A8/170 B
800/45 - 26.5	AG 28.00	-	800	1354	581	4017	STD	12	TL	158 A8/155 B	170 A8/167 B

Load capacity (kg/tire)

km/h - bar	2.70	2.80	2.90
10 FR	8455	8640	8820
20 FR	7610	7775	7940
30 FR	6765	6910	7055
40 FR	6040	6170	6300
50 FR	5435	5555	5800
10 DW	6040	6175	6300
20 DW	5435	5555	5670
30 DW	4835	4940	5040
40 DW	4315	4410	4500
50 DW	3885	3970	4125

km/h - bar	1.50	1.60	1.80
10 FR	7300	7580	8120
20 FR	6570	6825	7310
30 FR	5840	6065	6495
40 FR	5215	5415	5800
50 FR	4695	4875	5150
10 DW	5195	5390	5775
20 DW	4675	4850	5200
30 DW	4155	4310	4620
40 DW	3710	3850	4125
50 DW	3340	3465	3750

km/h - bar	2.00	2.20	2.40
10 FR	8430	8910	9380
20 FR	7585	8020	8440
30 FR	6740	7130	7505
40 FR	6020	6365	6700
50 FR	5420	5730	6000
10 DW	5980	6320	6650
20 DW	5380	5690	5985
30 DW	4780	5055	5320
40 DW	4270	4515	4750
50 DW	3845	4065	4250

km/h - bar	1.50	1.60	1.70
10 FR	7805	8105	8400
20 FR	7025	7295	7560
30 FR	6245	6485	6720
40 FR	5575	5790	6000
50 FR	5020	5210	5450
10 DW	5530	5740	5950
20 DW	4975	5165	5355
30 DW	4425	4590	4760
40 DW	3950	4100	4250
50 DW	3555	3690	3875

STD: Standard

Technologies

Heavy Duty

Reinforced Carcass

High Speed

Performance

High Load Capacity

Durability

Reduced Soil Compaction

Traction

FLOTATION 648

∅ 26.5”

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling
800/45 - 26.5	AG 28.00	-	800	1354	581	4017	STD	16	TL	164 A8/160 B	177 A8/173 B

Load capacity (kg/tire)

km/h - bar	1.80	2.00	2.20
10 FR	9085	9665	10220
20 FR	8175	8700	9200
30 FR	7270	7735	8175
40 FR	6490	6905	7300
50 FR	5840	6215	6500
10 DW	6225	6620	7000
20 DW	5600	5960	6300
30 DW	4980	5300	5600
40 DW	4445	4730	5000
50 DW	4000	4225	4500

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling
800/45 - 26.5	AG 28.00	-	800	1354	581	4017	STD	20	TL	170 A8/167 B	183 A8/180 B

km/h - bar	2.60	2.70	2.80
10 FR	11730	11990	12250
20 FR	10560	10790	11025
30 FR	9385	9595	9800
40 FR	8380	8565	8750
50 FR	7540	7710	8000
10 DW	8045	8225	8400
20 DW	7240	7405	7560
30 DW	6435	6580	6720
40 DW	5745	5875	6000
50 DW	5170	5290	5450

∅ 30.5”

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling
650/65 - 30.5	AG 20.00	-	650	1650	710	4935	STD	12	TL	162 A8/158 B	174 A8/170 B

km/h - bar	1.50	1.60	1.70
10 FR	8715	9050	9380
20 FR	7845	8145	8440
30 FR	6970	7240	7505
40 FR	6225	6465	6700
50 FR	5605	5820	6000
10 DW	6180	6420	6650
20 DW	5565	5775	5985
30 DW	4945	5135	5320
40 DW	4415	4585	4750
50 DW	3975	4125	4250

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling
650/65 - 30.5	AG 20.00	-	650	1650	710	4935	STD	16	TL	167 A8/163 B	179 A8/175 B

km/h - bar	1.80	2.00	2.20
10 FR	9645	10260	10850
20 FR	8680	9235	9765
30 FR	7715	8210	8680
40 FR	6890	7330	7750
50 FR	6200	6595	6900
10 DW	6785	7215	7630
20 DW	6105	6495	6865
30 DW	5425	5775	6105
40 DW	4845	5155	5450
50 DW	4360	4640	4875

STD: Standard

Technologies

Heavy Duty

Reinforced Carcass

High Speed

Performance

High Load Capacity

Durability

Reduced Soil Compaction

Traction

FLOTATION 648

∅ 30.5" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	1.80	2.00	2.20
650/65 - 30.5	AG 20.00	-	650	1650	710	4935	HD	16	TL	167 A8/163 B	179 A8/175 B	**10 FR**	9645	10260	10850
												20 FR	8680	9235	9765
												30 FR	7715	8210	8680
												40 FR	6890	7330	7750
												50 FR	6200	6595	6900
												10 DW	6785	7215	7630
												20 DW	6105	6495	6865
												30 DW	5425	5775	6105
												40 DW	4845	5155	5450
												50 DW	4360	4640	4875

												km/h - bar	2.30	2.40	2.50
650/65 - 30.5	AG 20.00	-	650	1650	710	4935	HD	18	TL	169 A8/165 B	181 A8/178 B	**10 FR**	10995	11275	11550
												20 FR	9895	10150	10395
												30 FR	8800	9020	9240
												40 FR	7855	8055	8250
												50 FR	7070	7250	7500
												10 DW	7735	7930	8120
												20 DW	6960	7140	7310
												30 DW	6190	6345	6495
												40 DW	5525	5665	5800
												50 DW	4975	5100	5150

												km/h - bar	1.50	1.60	1.70
750/60 - 30.5	AG 24.00	-	750	1650	710	4935	STD	12	TL	164 A8/160 B	176 A8/172 B	**10 FR**	9240	9595	9940
												20 FR	8315	8635	8945
												30 FR	7390	7680	7950
												40 FR	6600	6855	7100
												50 FR	5940	6170	6300
												10 DW	6505	6755	7000
												20 DW	5855	6080	6300
												30 DW	5200	5405	5600
												40 DW	4645	4825	5000
												50 DW	4180	4345	4500

												km/h - bar	1.80	2.00	2.20
750/60 - 30.5	AG 24.00	-	750	1650	710	4935	STD	16	TL	170 A8/167 B	182 A8/179 B	**10 FR**	10585	11255	11900
												20 FR	9525	10130	10710
												30 FR	8465	9005	9520
												40 FR	7560	8040	8500
												50 FR	6805	7235	7750
												10 DW	7470	7945	8400
												20 DW	6720	7150	7560
												30 DW	5975	6355	6720
												40 DW	5335	5675	6000
												50 DW	4800	5110	5450

STD: Standard - HD: Heavy Duty

Technologies

- Heavy Duty
- Reinforced Carcass
- High Speed

Performance

- High Load Capacity
- Durability
- Reduced Soil Compaction
- Traction

FLOTATION 648

∅ 30.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling
	850/50 - 30.5	AG 28.00	-	850	1650	710	4935	STD	12	TL	168 A8/164 B	180 A8/176 B
	850/50 - 30.5	AG 28.00	-	850	1650	710	4935	STD	16	TL	174 A8/170 B	186 A8/182 B
	850/50 - 30.5	AG 28.00	-	850	1650	710	4935	HD	16	TL	174 A8/170 B	186 A8/182 B
	850/50 - 30.5	AG 28.00	-	850	1650	710	4935	HD	18	TL	176 A8/173 B	189 A8/185 B

Load capacity (kg/tire)

km/h - bar	1.10	1.30	1.50
10 FR	9345	10305	11200
20 FR	8410	9275	10080
30 FR	7475	8245	8960
40 FR	6675	7360	8000
50 FR	6010	6625	7100
10 DW	6540	7210	7840
20 DW	5885	6490	7055
30 DW	5230	5770	6270
40 DW	4670	5150	5600
50 DW	4205	4635	5000

km/h - bar	1.80	2.00	2.20
10 FR	11830	12580	13300
20 FR	10645	11320	11970
30 FR	9465	10065	10640
40 FR	8450	8985	9500
50 FR	7605	8085	8500
10 DW	8345	8870	9380
20 DW	7510	7980	8440
30 DW	6675	7095	7505
40 DW	5960	6335	6700
50 DW	5365	5700	6000

km/h - bar	2.30	2.40	2.50
10 FR	13735	14075	14420
20 FR	12360	12670	12980
30 FR	10985	11260	11535
40 FR	9810	10055	10300
50 FR	8830	9050	9250
10 DW	9465	9700	9940
20 DW	8520	8730	8945
30 DW	7570	7760	7950
40 DW	6760	6930	7100
50 DW	6085	6235	6500

STD: Standard - HD: Heavy Duty

Technologies

Heavy Duty

Reinforced Carcass

High Speed

Performance

High Load Capacity

Durability

Reduced Soil Compaction

Traction

Bias



FLOTATION 648 T

FLOTATION 648 T is particularly suitable for field and road transport as well as for hay harvesting. Its tread design allows for carrying very high loads at low pressure and ensures outstanding self-cleaning properties. In line with BKT's commitment to provide products supporting the farming business, FLOTATION 648 T maximizes your yield and takes care of the land.

∅ 22.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	
	550/45 - 22.5	AG 16.00	-	550	1070	475	3203	STD	16	TL	147 A8/144 B	159 A8/156 B	
	550/45 - 22.5	AG 16.00	-	550	1070	475	3203	STD	20	TL	154 A8/150 B	166 A8/162 B	

Load capacity (kg/tire)

km/h - bar	2.40	2.60	2.80
10 FR	5600	5865	6125
20 FR	5040	5280	5515
30 FR	4480	4695	4900
40 FR	4000	4190	4375
50 FR	3600	3770	4000
10 DW	3935	4125	4305
20 DW	3540	3710	3875
30 DW	3145	3300	3445
40 DW	2810	2945	3075
50 DW	2530	2650	2800

km/h - bar	3.00	3.50	4.00
10 FR	6270	6860	7420
20 FR	5645	6175	6680
30 FR	5020	5490	5935
40 FR	4480	4900	5300
50 FR	4030	4410	4750
10 DW	4440	4860	5250
20 DW	3995	4370	4725
30 DW	3550	3885	4200
40 DW	3170	3470	3750
50 DW	2855	3125	3350

STD: Standard

Performance

Durability

High Load Capacity

Traction



Bias



FLOTATION TR 675

FLOTATION TR 675 is best suited for soil tillage operations and transport. It fits trailers, compact dumpers and implement machinery. FLOTATION TR 675 has been engineered to provide outstanding traction remaining gentle on the ground to prevent crop damages.

∅ 22.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	km/h - bar	Load capacity (kg/tire) 1.50	2.00	2.40
	500/60 - 22.5	AG 16.00	15.00 ; 17.00	500	1181	534	3505	STD	12	TL	145 A8/142 B	157 A8/154 B	10 FR	4390	5195	5775
													20 FR	3950	4675	5200
													30 FR	3510	4155	4620
													40 FR	3135	3710	4125
													50 FR	2820	3340	3750
													10 DW	3085	3645	4060
													20 DW	2780	3280	3655
													30 DW	2470	2920	3250
													40 DW	2205	2605	2900
													50 DW	1985	2345	2650

													km/h - bar	2.80	3.00	3.20
	500/60 - 22.5	AG 16.00	15.00 ; 17.00	500	1181	534	3505	STD	16	TL	151 A8/148 B	163 A8/159 B	30 FR	5050	5260	5460
													40 FR	4510	4695	4875
													50 FR	4060	4225	4375
													10 DW	4465	4650	4830
													20 DW	4020	4185	4345
													30 DW	3575	3720	3865
													40 DW	3190	3320	3450
													50 DW	2870	2990	3150

													km/h - bar	3.70	3.80	4.00
	500/60 - 22.5	AG 16.00	15.00 ; 17.00	500	1181	534	3505	DB	20	TL	155 A8/151 B	168 A8/164 B	10 FR	7425	7545	7840
													20 FR	6685	6790	7055
													30 FR	5940	6035	6270
													40 FR	5305	5390	5600
													50 FR	4775	4850	5000
													10 DW	5255	5340	5425
													20 DW	4730	4805	4885
													30 DW	4205	4275	4340
													40 DW	3755	3815	3875
													50 DW	3380	3435	3450

STD: Standard - DB: Dual Bead

Performance

Durability

High Load Capacity

Traction

FLOTATION TR 675

∅ 22.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.00	3.50	4.00
	550/45 - 22.5	AG 16.00	-	543	1070	-	-	STD	20	TL	154 A8/150 B	166 A8/162 B		10 FR	6270	6860	7420
														20 FR	5645	6175	6680
														30 FR	5020	5490	5935
														40 FR	4480	4900	5300
														50 FR	4030	4410	4750
														10 DW	4440	4860	5250
														20 DW	3995	4370	4725
														30 DW	3550	3885	4200
														40 DW	3170	3470	3750
														50 DW	2855	3125	3350
	550/60 - 22.5	AG 16.00	-	550	1260	547	3640	STD	12	TL	148 A8/144 B	160 A8/156 B		km/h - bar	1.50	1.80	2.10
														10 FR	5175	5755	6300
														20 FR	4655	5180	5670
														30 FR	4140	4605	5040
														40 FR	3695	4110	4500
														50 FR	3325	3700	4000
														10 DW	3620	4030	4410
														20 DW	3255	3630	3970
														30 DW	2895	3225	3530
														40 DW	2585	2880	3150
														50 DW	2325	2590	2800
	550/60 - 22.5	AG 16.00	-	550	1260	547	3640	STD	16	TL	154 A8/150 B	167 A8/163 B		km/h - bar	2.40	2.60	2.80
														10 FR	6970	7310	7630
														20 FR	6275	6575	6865
														30 FR	5580	5845	6105
														40 FR	4980	5220	5450
														50 FR	4480	4700	4875
														10 DW	4795	5025	5250
														20 DW	4315	4525	4725
														30 DW	3835	4020	4200
														40 DW	3425	3590	3750
														50 DW	3085	3230	3350
∅ 28"	540/60 - 28	W 16 L	W 18 L	530	1425	-	-	SB	16	TL	155 A8/161 A2			km/h - bar	3.30		
														40	3875		

Performance

Durability

High Load Capacity

Traction

STD: Standard - SB: Steel Belted

Bias



FLOTATION TR 678

FLOTATION TR 678 has been specially designed for trailers and agricultural implements both on- and off the road. This tire allows for carrying very heavy loads at low pressure ensuring reduced soil compaction at the same time. It provides excellent traction and outstanding self-cleaning properties. FLOTATION TR 678 size 600/40 - 22.5 as dual bead HD version, and size 650/45 - 22.5 all versions are also suitable for excavators.

∅ 15.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	2.40
	280/60 - 15.5	8.0	-	275	750	357	2250	STD	-	TL	115 A8		40	1215
	280/60 - 15.5	8.0	-	275	750	357	2250	STD	-	TL	128 A8		km/h - bar	4.7
													40	1800
∅ 22.5"	600/40 - 22.5	AG 20.00	-	615	1085	483	3264	DB	20	TL	157 A8	169 A8	km/h - bar	4.10
													40 FR	5800
													40 DW	4125

STD: Standard - DB: Dual Bead

Performance

Durability

High Load Capacity

Self-Cleaning

Traction



Bias



FLOTATION RIB 774

FLOTATION RIB 774 is suitable in all free-rolling applications and ideal for trailers and implement machinery. It has been designed to provide best handling comfort optimizing the timing of operations as well as farmers' productivity.

∅ 22.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	1.50	1.80	2.10
	550/60 - 22.5	AG 16.00	-	550	1240	540	3725	STD	12	TL	-	160 A8/156 B	10 FR	5175	5755	6300
													20 FR	4655	5180	5670
													30 FR	4140	4605	5040
													40 FR	3695	4110	4500
													50 FR	3325	3700	4000

	550/60 - 22.5	AG 16.00	-	550	1240	540	3725	STD	16	TL	-	167 A8/163 B	km/h - bar	2.40	2.60	2.80
													10 FR	6970	7310	7630
													20 FR	6275	6575	6865
													30 FR	5580	5845	6105
													40 FR	4980	5220	5450
													50 FR	4480	4700	4875

	600/55 - 22.5	AG 20.00	-	600	1230	540	3716	STD	12	TL	-	164 A8/160 B	km/h - bar	1.50	1.70	2.00
													10 FR	5915	6365	7000
													20 FR	5325	5725	6300
													30 FR	4730	5090	5600
													40 FR	4225	4545	5000
													50 FR	3805	4090	4500

	600/55 - 22.5	AG 20.00	-	600	1230	540	3716	STD	16	TL	-	169 A8/166 B	km/h - bar	2.20	2.40	2.60
													10 FR	7365	7750	8120
													20 FR	6630	6975	7310
													30 FR	5890	6200	6495
													40 FR	5260	5535	5800
													50 FR	4735	4980	5300

STD: Standard

Performance

Durability

High Load Capacity



FORESTRY



Bias



FORESTECH

FORESTECH is a BKT bias steel-belted tire, suitable for forestry applications with forwarders. It provides excellent traction even in heavy-duty service. The strong bead and shoulder area ensure high puncture resistance as well as a longer tire life-cycle. As a result, you can deal with the most difficult operating conditions in a forest without concern.

∅ 22.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	5.00
	710/40 - 22.5	AG 24.00	-	710	1165	550	3612	SB	20	TL	161 A8/ 165 A2		**40**	4625
													30	5000
													10	5150

∅ 26.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	5.00
	600/55 - 26.5	AG 20.00	-	610	1335	618	4032	SB	20	TL	165 A8/ 172 A2		**40**	5150
													30	5510
													10	6300
	710/45 - 26.5	AG 24.00	-	710	1340	620	4047	SB	20	TL	168 A8/ 175 A2		**40**	5600
													30	5990
													10	6900
	750/55 - 26.5	DW 23 B	DW 25 B	755	1485	680	4467	SB	20	TL	177 A8/ 184 A2		**40**	7300
													30	7810
													10	9000

SB: Steel Belted

Technologies

Steel Belted

Performance

Traction

Heavy Duty

Durability

High Puncture Resistance

Bias



FS 216

FS 216 has a robust log design with optimum angle and wider width to enhance traction performance for loggers and skidders. It provides excellent cut and chip resistance under the most critical operating conditions and ensures maximum protection against possible damages at any time.

∅ 26"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	Load capacity (kg/tire) km/h - bar	2.10	1.70
	18.4 - 26	DW 16 A	-	467	1476	682	4433	SB	10	TT	**10**	3600	-
											30	-	2575
	23.1 - 26	DW 20 A ; DW 20 B	-	587	1615	726	4780	SB	10	TT	**km/h - bar**	**1.70**	**1.40**
											10	4540	-
											30	-	3250
	23.1 - 26	DW 20 A ; DW 20 B	-	587	1615	726	4780	SB	12	TT	**km/h - bar**	**2.10**	**1.70**
											10	5260	-
											30	-	3750
	23.1 - 26	DW 20 A ; DW 20 B	-	587	1615	726	4780	SB	14	TT	**km/h - bar**	**2.40**	**2.10**
											10	5760	-
											30	-	4125
	23.1 - 26	DW 20 A ; DW 20 B	-	587	1615	726	4780	SB	16	TT	**km/h - bar**	**2.80**	**2.40**
											10	6300	-
											30	-	4500
	23.1 - 26	DW 20 A ; DW 20 B	-	587	1615	726	4780	SB	16	TL	**km/h - bar**	**2.80**	**2.40**
											10	6300	-
											30	-	4500
	23.1 - 26	DW 20 A ; DW 20 B	-	587	1615	726	4780	SPL	16	TL	**km/h - bar**	**2.80**	**2.40**
											10	6300	-
											30	-	4500
	23.1 - 26	DW 20 A ; DW 20 B	-	587	1615	726	4780	STD	20	TT	**km/h - bar**	**3.20**	**3.00**
											10	6700	-
											30	-	5150

SB: Steel Belted - STD: Standard - SPL: Special

Technologies

Reinforced Bead

Steel Belted

Performance

Durability

Self-Cleaning

High Puncture Resistance

High Load Capacity

Traction

FS 216

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	2.10	1.70
∅ 26"	**28L - 26**	DW 25 A ; DW 25 B	-	720	1660	742	4912	SB	14	TL		**10**	5940	-
												30	-	4250
	28L - 26	DW 25 A ; DW 25 B	-	720	1660	742	4912	SB	18	TL		**km/h - bar**	**2.6**	**2.2**
												10	6900	-
												30	-	4875
	28L - 26	DW 25 A ; DW 25 B	-	720	1660	742	4912	SB	20	TL		**km/h - bar**	**2.80**	**2.40**
												10	7300	-
												30	-	5150
	28L - 26	DW 25 A ; DW 25 B	-	720	1660	742	4912	SB	26	TL		**km/h - bar**	**4.00**	**3.40**
												10	9200	-
												30	-	6550
∅ 30"	**18.4 - 30**	DW 16 A	-	467	1577	724	4736	SB	10	TT		**km/h - bar**	**2.10**	**1.70**
												10	3820	-
												30	-	2725
	18.4 - 30	DW 16 A	-	467	1577	724	4736	SB	14	TT		**km/h - bar**	**2.80**	**2.40**
												10	4750	-
												30	-	3350
∅ 32"	**24. 5 - 32**	DH 21	DH 21 B	622	1831	836	5456	SB	16	TL		**km/h - bar**	**2.40**	**2.10**
												10	7000	-
												30	-	5000
	24.5 - 32	DH 21	DH 21 B	622	1831	836	5456	SB	24	TL		**km/h - bar**	**3.40**	**3.10**
												10	8500	-
												30	-	6300
	30.5L - 32	DH 27	DH 27 B	775	1847	833	5466	SB	16	TL		**km/h - bar**	**2.10**	**1.70**
												10	7450	-
												30	-	5300
	30.5L - 32	DH 27	DH 27 B	775	1847	833	5466	SB	20	TL		**km/h - bar**	**2.40**	**2.10**
												10	8400	-
												30	-	6000

SB: Steel Belted

Technologies

- Reinforced Bead
- Steel Belted

Performance

- Durability
- Self-Cleaning
- High Puncture Resistance
- High Load Capacity
- Traction

FS 216

∅ 32"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	3.10	2.80
	30.5L - 32	DH 27	DH 27 B	775	1847	833	5466	SB	26	TL		**10**	10000	-
												30	-	7100
	30.5L - 32	DH 27	DH 27 B	775	1847	833	5466	SB	32	TL		**km/h - bar**	**3.8**	**3.5**
												10	11500	-
												30	-	8000
	DH 35.5L - 32	DH 31	DH 31 H	907	2011	912	5992	SB	20	TL		**km/h - bar**	**1.70**	**2.10**
												10	-	103000
												30	7300	-
	DH 35.5L - 32	DH 31	DH 31 H	907	2011	912	5992	SB	24	TL		**km/h - bar**	**2.10**	**2.40**
												10	-	11200
												30	8000	-
	DH 35.5L - 32	DH 31	DH 31 H	907	2011	912	5992	SB	30	TL		**km/h - bar**	**3.1**	**3.5**
												10	-	14000
												30	10000	-
∅ 34"	**18.4 - 34**	DW 16 A	-	467	1679	768	5042	SB	10	TT		**km/h - bar**	**2.10**	**1.70**
												10	4060	-
												30	-	2900
	18.4 - 34	DW 16 A	-	467	1679	768	5042	SB	14	TL		**km/h - bar**	**2.80**	**2.40**
												10	4875	-
												30	-	3550

SB: Steel Belted

Technologies

- Reinforced Bead
- Steel Belted

Performance

- Durability
- Self-Cleaning
- High Puncture Resistance
- High Load Capacity
- Traction



FORESTRY

Bias



F 240

F 240 is a forestry tire designed for logging applications. Its tread pattern provides excellent traction, self-cleaning properties in addition to good steering. The superior tread compound ensures extraordinary cut-and-wear resistance resulting in a longer service life. F 240 shows a large contact area for better stability.

∅ 15.5”	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	3.50
	18 - 15.5	AG 13.00	-	450	990	-	-	STD	14 PR	TT		**30**	4185
	400 - 15.5	AG 13.00	-	405	865	-	-	STD	12 PR	TT		**km/h - bar**	**3.80**
												30	3150

STD: Standard

Performance

Traction

Self-Cleaning

Durability

Cut Resistance



Bias



TR 678

TR 678 has been specially designed for forestry applications. Its robust lug design provides excellent traction and self-cleaning. The strong casing structure stands for high load capacity whereas its steel belts protect the tire from punctures and damages. TR 678 features a cut-resistant tread compound providing excellent cut-and-chip resistance even on difficult terrains under extreme conditions.

∅ 22.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 6.00
	600/40 - 22.5	AG 20.00	-	615	1085	483	3264	DB HD	20	TL	169 A8	**40**	5800
	650/45 - 22.5	20.0	-	650	1150	502	3302	STD	-	TL	160 D	**km/h - bar**	**4.00**
												65	4875
	650/45 - 22.5	20.0	-	650	1150	502	3302	STD	20	TL	166 B	**km/h - bar**	**4.50**
												50	5300
	650/45 - 22.5	20.0	-	650	1150	502	3302	SB	20	TL	166 B	**km/h - bar**	**4.50**
												50	5300
∅ 34"	**600/65 - 34**	DW 20 B	-	610	1644	758	4916	SB	14	TL	164 A2/ 160 A6	**km/h - bar**	**2.40**
												30	4500
												10	5000
	600/65 - 34	DW 20 B	-	610	1644	758	4916	SB	16	TL	166 A2/ 162 A6	**km/h - bar**	**2.60**
												30	4750
												10	5300
	600/65 - 34	DW 20 B	-	610	1644	758	4916	SB	20	TL	170 A2/ 166 A6	**km/h - bar**	**3.20**
												30	5300
												10	6000
	700/55 - 34	DW 24 B	-	700	1640	757	4890	SB	14	TL	168 A2/ 163 A6	**km/h - bar**	**2.40**
												30	4875
												10	5600

DB HD: Dual Bead Heavy Duty - STD: Standard - SB: Steel Belted

Technologies

Steel Belted

Performance

Traction

Self-Cleaning

High Load Capacity

Cut and Chip Resistance

TR 678

∅ 34"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 3.20
	700/55 - 34	DW 24 B	-	700	1640	757	4890	STD	20	TL	173 A2/ 168 A6		**30**	5600
													10	6500
	700/55 - 34	DW 24 B	-	700	1640	757	4890	SB	20	TL	173 A2/ 168 A6		**km/h - bar**	**3.20**
													30	5600
													10	6500

STD: Standard - SB: Steel Belted

Technologies

Steel Belted

Performance

Traction

Self-Cleaning

High Load Capacity

Cut and Chip Resistance



MULTIUSE

Radial



MULTIMAX MP 513

MULTIMAX MP 513 has been designed by BKT for multi-purpose vehicles in municipality/ maintenance applications. Thanks to the strong steel-belted nylon casing, MULTIMAX MP 513 allows to carry heavy loads at high speeds. Its reinforced bead ensures a longer service life and extra mileage to enhance productivity.

MULTIMAX RADIAL MPT TIRES

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version		Load capacity (kg/tire)					
∅ 17"												km/h - bar	1.6	2.0	2.5	3.0	3.5
	425/55 R 17 MPT	134 G	13	13.00	421	900	399	2645	-	STD		90	1080	1280	1550	1830	2120
												65	1175	1390	1685	1990	2305
												40	1245	1475	1785	2105	2440

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version		Load capacity (kg/tire)						
∅ 18"												km/h - bar	1.6	2.0	2.5	3.0	3.5	3.75
	365/70 R 18 MPT	133 G	11	11 SDC ; 12 ; 12 SDC	360	969	448	2933	-	STD		90	1080	1280	1520	1760	2000	2060
												65	1170	1380	1650	1910	2170	2240
												40	1250	1470	1750	2020	2300	2370
∅ 20"	375/70 R 20 MPT	136 G	12	W 10 ; DW 10 ; 11 ; 11 SDC ; W 11 ; DW 11 ; 12 SDC	377	1034	472	3121	-	STD		km/h - bar	1.6	2.0	2.5	3.0	3.5	
												90	1210	1435	1705	1975	2240	
												65	1315	1560	1855	2145	2435	
												40	1395	1655	1965	2275	2580	
	405/70 R 20 MPT	136 G	13	13 SDC ; 12 SDC	407	1076	493	3253	-	STD		km/h - bar	1.6	2.0	2.5	3.0	3.5	
												90	1340	1580	1820	2040	2240	
												65	1455	1715	1975	2215	2435	
												40	1545	1820	2095	2350	2580	
	425/75 R 20 MPT	148 G	13	13 SDC ; 11 SDC ; 12 SDC ; 11 ; 12	421	1146	521	3479	-	STD		km/h - bar	1.6	2.0	2.5	3.0	3.5	4.0
												90	1540	1810	2150	2490	2820	3150
												65	1675	1965	2335	2705	3060	3420
												40	1775	2085	2475	2865	3245	3625
∅ 24"	495/70 R 24 MPT	155 G	W 16 L	DW 15 L ; DW 16 L ; W 15 L	499	1304	588	3974	-	STD		km/h - bar	1.6	2.0	2.5	3.0	3.5	
												90	1980	2340	2840	3250	3875	
												65	2150	2540	3085	3530	4205	
												40	2280	2695	3270	3740	4460	

STD: Standard

Technologies

High Speed

Steel Belted

Performance

Durability

Handling & Comfort

Traction

Self-Cleaning

MULTIUSE

Radial



MULTIMAX MP 515

Multimax MP 515 is a multipurpose radial tire designed for spreaders and utility tractors. The tire shows a unique tread design providing superior riding comfort on the road as well as excellent self-cleaning properties. The strong steel-belted nylon casing ensures extraordinary durability. MULTIMAX MP 515 is made of a special puncture-resistant tread compound providing a longer service life. Speed index class G (90km/h).

∅ 20"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	405/70 R 20 MPT	136 G	13	13 SDC ; 12 SDC ; 11 SDC ; 11	407	1076	493	3253	-	STD
	425/75 R 20 MPT	148 G	13	13 SDC ; 11 SDC ; 12 SDC ; 11 ; 12	421	1146	522	3491	-	STD
∅ 22.5"	445/65 R 22.5 MPT	160 G	13	14	444	1150	527	3532	-	STD

Load capacity (kg/tire)

km/h - bar	1.6	2.0	2.5	3.0	3.5	4.0	4.5	6.0
90	1340	1580	1820	2040	2240			
65	1455	1715	1975	2215	2435			
40	1545	1820	2095	2350	2580			
90	1540	1810	2150	2490	2820	3150		
65	1675	1965	2335	2705	3060	3420		
40	1775	2085	2475	2865	3245	3625		
90	1740	2060	2410	2750	3075	3390	3800	4500
65	1890	2235	2615	2985	3340	3675	4000	4885
40	2005	2365	2770	3165	3540	3900	4240	5175

Performance

Self-Cleaning

Durability

Handling & Comfort

Traction

STD: Standard

MULTIUSE

Radial



MULTIMAX MP 519

MULTIMAX MP 519 is a particularly suitable tire for light trucks in all transport applications. The steel-belted casing provides excellent stability at high-speed (90 km/h - 60 mph). Thanks to its low rolling resistance, the tire ensures reduced fuel consumption.

∅ 16"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	7.50 R 16LT	109/107 G	6.00	50.5 F; 6L; 7L	220	810	377	2449	-	STD

Load capacity (kg/tire)

km/h - bar	3.5
90 LS	1030
90 LD	975

STD: Standard

Technologies

High Speed

Steel Belted

Performance

Stability

Fuel Economy

Radial



MULTIMAX MP 522

MULTIMAX MP 522 is the BKT multi-purpose tire developed for manifold agro-industrial applications. It is suitable for all digging and loading operations on vehicles such as telehandlers, compact loaders and backhoe loaders. Stability and high load capacity are its strengths as well as outstanding puncture resistance. MULTIMAX MP 522 is the right response for all agro-industrial heavy-duty needs.

MULTIMAX RADIAL MPT TIRES

∅ 18"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire) km/h - bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
	280/80 R 18 IND	132 A8/B	W 9 ; 9 ; 9 SDC	W 8 ; W 10	282	907	421	2727	350	STD	50	960	1140	1300	1480	1660	1780	2000	-	-
											40	960	1140	1300	1480	1660	1780	2000	-	-
											30	1030	1220	1395	1585	1780	1905	2140	-	-
											25	1070	1270	1445	1645	1845	1980	2220	-	-
											10 Cyc.	1170	1440	1695	1950	2220	2415	2730	2880	3000
											Static	1795	2210	2600	2990	3405	3705	4190	4420	4600
	340/80 R 18 IND	143 A8/B	11 ; 11 SDC ; W 11	W 10 ; 12 ; 12 SDC	343	1001	458	3002	475	STD	km/h - bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
											50	1310	1555	1775	2020	2265	2430	2725	-	-
											40	1310	1555	1775	2020	2265	2430	2725	-	-
											30	1405	1665	1900	2165	2425	2600	2920	-	-
											25	1455	1725	1970	2240	2515	2695	3025	-	-
											10 Cyc.	1600	1965	2315	2660	3030	3295	3725	3930	4090
											Static	2450	3010	3545	4080	4640	5050	5710	6020	6270
∅ 20"	340/80 R 20 IND	144 A8/B	11	W10 ; 11 SDC ; W11 ; 12 ; 12 SDC	343	1052	481	3212	500	STD	km/h - bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
											50	1345	1600	1820	2075	2325	2495	2800	-	-
											40	1345	1600	1820	2075	2325	2495	2800	-	-
											30	1440	1710	1950	2220	2490	2670	3000	-	-
											25	1495	1775	2025	2305	2585	2770	3110	-	-
											10 Cyc.	1640	2020	2375	2730	3110	3385	3825	4035	4200
											Static	2515	3095	3640	4190	4770	5185	5865	6185	6440
	380/75 R 20 IND	148 A8/B	W 12	W 11 ; 11 ; 12	384	1074	483	3251	500	STD	km/h - bar	1.6	2.0	2.4	2.8	3.2	3.6	3.8	4.0	4.2	4.4
											50	1500	1770	2040	2305	2575	2860	3005	3150	-	-
											40	1500	1770	2040	2305	2575	2860	3005	3150	-	-
											30	1610	1900	2195	2490	2780	3075	3220	3370	-	-
											25	1670	1975	2280	2585	2890	3195	3350	3500	-	-
											10 Cyc.	1850	2260	2670	3080	3490	3900	4110	4315	4520	4730
											Static	2840	3470	4100	4730	5360	5990	6305	6620	6935	7250
	400/70 R 20 IND	149 A8/B	13	12 SDC ; 13 SDC ; 14	404	1068	476	3199	525	STD	km/h - bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
											50	1560	1855	2115	2405	2700	2895	3250	-	-
											40	1560	1855	2115	2405	2700	2895	3250	-	-
											30	1675	1985	2265	2580	2890	3100	3480	-	-
											25	1735	2060	2350	2675	3000	3215	3610	-	-
											10 Cyc	1905	2340	2755	3170	3610	3925	4440	4680	4875
											Static	2920	3590	4225	4860	5535	6020	6805	7180	7475
∅ 24"	400/70 R 24 IND	152 A8/B	13	DW 12 ; 13 SDC ; DW 13 ; DW 13 L ; DW 14 L	404	1170	533	3527	575	STD	km/h - bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
											50	1705	2025	2310	2630	2950	3160	3550	-	-
											40	1705	2025	2310	2630	2950	3160	3550	-	-
											30	1825	2170	2470	2815	3155	3385	3800	-	-
											25	1895	2250	2565	2920	3275	3515	3945	-	-
											10 Cyc.	2080	2560	3010	3465	3945	4290	4850	5115	5325
											Static	3185	3920	4615	5310	6045	6575	7435	7840	8165

STD: Standard

Technologies

Steel Belted

Special Compound

Performance

Stability

Traction

High Puncture Resistance

Cut and Chip Resistance

MULTIMAX MP 522

∅ 24"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	400/80 R 24 IND	162 A8/B	DW 13	DW 12 ; DW 13 L ; DW 14 L	404	1250	553	3778	600	STD
	440/80 R 24 IND	161 A8/B	DW 14 L	DW 13 ; DW 13 L ; DW 15 L	441	1314	586	3956	625	STD
	460/70 R 24 IND	159 A8/B	DW 15 L	DW 14 L ; DW 16 L	465	1250	568	3766	600	STD
	500/70 R 24 IND	164 A8/B	DW 16 L	DW 15 L ; DW 18 L	503	1310	595	3890	625	STD
	540/70 R 24 IND	168 A8/B	DW 16 L	DW 18 L	530	1366	611	4133	650	STD
∅ 26"	480/80 R 26 IND	160 A8/B	DW 15 L	DW 16 L	479	1428	638	4287	675	STD
∅ 28"	440/80 R 28 IND	156 A8/B	DW 14 L	DW 13 ; DW 13 L ; DW 15 L	441	1415	643	4278	675	STD

Load capacity (kg/tire)

km/h - bar	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4
50	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-
40	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-
30	1985	2340	2750	3105	3460	3590	3770	4170	4515	4745	4860	5085	-	-
25	2060	2430	2850	3220	3590	3725	3910	4330	4690	4925	5040	5275	-	-
10 Cyc.	2280	2785	3280	3850	4350	4600	4845	5280	5845	6090	6330	6655	6810	7125
Static	3500	4270	5030	5900	6670	7050	7430	8100	8960	9340	9710	10205	10445	10925

km/h - bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
50	2220	2640	3010	3425	3840	4120	4625	-	-
40	2220	2640	3010	3425	3840	4120	4625	-	-
30	2380	2825	3220	3665	4110	4410	4950	-	-
25	2465	2930	3340	3800	4265	4575	5135	-	-
10 Cyc.	2710	3335	3925	4515	5140	5590	6320	6665	6940
Static	4150	5110	6015	6920	7875	8570	9685	10215	10640

km/h - bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
50	2100	2495	2845	3240	3635	3895	4375	-	-
40	2100	2495	2845	3240	3635	3895	4375	-	-
30	2250	2675	3050	3470	3890	4170	4685	-	-
25	2335	2775	3160	3600	4035	4330	4860	-	-
10 Cyc	2565	3155	3710	4270	4860	5285	5975	6305	6565
Static	3930	4835	5690	6545	7450	8105	9160	9665	10065

km/h - bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
50	2400	2850	3250	3700	4150	4450	5000	-	-
40	2400	2850	3250	3700	4150	4450	5000	-	-
30	2570	3050	3480	3960	4445	4765	5350	-	-
25	2665	3165	3610	4110	4610	4940	5550	-	-
10 Cyc	2925	3600	4240	4875	5550	6040	6825	7200	7500
Static	4485	5520	6500	7475	8510	9260	10465	11040	11500

km/h - bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
50	2690	3195	3640	4145	4650	4985	5600	-	-
40	2690	3195	3640	4145	4650	4985	5600	-	-
30	2880	3420	3900	4440	4980	5340	5995	-	-
25	2990	3550	4045	4605	5165	5540	6220	-	-
10 Cyc.	3280	4035	4750	5460	6220	6765	7645	8065	8400
Static	5025	6185	7280	8375	9535	10370	11725	12365	12880

km/h - bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6
50	2610	3060	3330	3555	3780	4005	4275	4500	-	-
40	2610	3060	3330	3555	3780	4005	4275	4500	-	-
30	2795	3275	3565	3805	4045	4290	4575	4815	-	-
25	2900	3400	3700	3950	4200	4450	4750	4995	-	-
10 Cyc.	3175	3915	4255	4590	4995	5335	5670	6075	6415	6750
Static	4865	6005	6525	7040	7660	8180	8695	9315	9835	10350

km/h - bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6
50	2300	2725	2940	3150	3360	3575	3790	4000	-	-
40	2300	2725	2940	3150	3360	3575	3790	4000	-	-
30	2480	2930	3155	3380	3605	3830	4055	4280	-	-
25	2570	3040	3270	3505	3740	3970	4205	4440	-	-
10 Cyc.	2840	3470	3790	4105	4420	4735	5050	5370	5685	6000
Static	4360	5330	5810	6295	6780	7265	7750	8230	8715	9200

Technologies

Steel Belted

Special Compound

Performance

Stability

Traction

High Puncture Resistance

Cut and Chip Resistance

STD: Standard

Radial



MULTIMAX MP 527

MULTIMAX MP 527 is a multi-purpose radial tire designed for telehandlers and compact loaders in agro-industrial applications. The tire shows a block pattern design providing excellent traction even on the harder surfaces. The strong sidewall ensures outstanding stability in lift mode. MULTIMAX MP 527 is made of a special cut-and-chip-resistant compound providing and a long service life.

MULTIMAX RADIAL MPT TIRES

∅ 18"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	340/80 R 18 IND	143 A8/B	11 ; 11 SDC ; W 11	W 10 ; 12 ; 12 SDC	343	1001	455	2944	475	STD
	360/70 R 18 IND	142 A8/B	11	W10 ; 11 SDC ; W11 ; 12 ; 12 SDC	360	969	439	2887	475	STD
∅ 20"	340/80 R 20 IND	144 A8/B	11	W10 ; 11 SDC ; W11 ; 12 ; 12 SDC	343	1052	483	3176	500	STD
	400/70 R 20 IND	149 A8/B	13	12 SDC ; 13 SDC; 14	404	1068	494	3282	525	STD
∅ 24"	400/70 R 24 IND	152 A8/B	13	DW 12 ; DW 13 ; DW 13 L ; 13 SDC ; DW 14 L	404	1170	542	3597	575	STD

Load capacity (kg/tire)

km/h - bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
50	1310	1555	1775	2020	2265	2430	2725	-	-
40	1310	1555	1775	2020	2265	2430	2725	-	-
30	1405	1665	1900	2165	2425	2600	2920	-	-
25	1455	1725	1970	2240	2515	2695	3025	-	-
10 Cyc.	1600	1965	2315	2660	3030	3295	3725	3930	4090
Static	2450	3010	3545	4080	4640	5050	5710	6020	6270

km/h - bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
50	1310	1555	1775	2020	2265	2430	2725	-	-
40	1310	1555	1775	2020	2265	2430	2725	-	-
30	1405	1665	1900	2165	2425	2600	2920	-	-
25	1455	1725	1970	2240	2515	2695	3025	-	-
10 Cyc.	1600	1965	2315	2660	3030	3295	3725	3930	4090
Static	2450	3010	3545	4080	4640	5050	5710	6020	6270

km/h - bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
50	1345	1600	1820	2075	2325	2495	2800	-	-
40	1345	1600	1820	2075	2325	2495	2800	-	-
30	1440	1710	1950	2220	2490	2670	3000	-	-
25	1495	1775	2025	2305	2585	2770	3110	-	-
10 Cyc.	1640	2020	2375	2730	3110	3385	3825	4035	4200
Static	2515	3095	3640	4190	4770	5185	5865	6185	6440

km/h - bar	1.6	2.0	2.4	2.8	3.2	3.6	3.8	4.0	4.2	4.4
50	1560	1855	2115	2405	2700	2895	3250	-	-	-
40	1560	1855	2115	2405	2700	2895	3250	-	-	-
30	1675	1985	2265	2580	2890	3100	3480	-	-	-
25	1735	2060	2350	2675	3000	3215	3610	-	-	-
10 Cyc.	1905	2340	2755	3170	3610	3925	4440	4680	4875	4730
Static	2920	3590	4225	4860	5535	6020	6805	7180	7475	7250

km/h - bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
50	1705	2025	2310	2630	2950	3160	3550	-	-
40	1705	2025	2310	2630	2950	3160	3550	-	-
30	1825	2170	2470	2815	3155	3385	3800	-	-
25	1895	2250	2565	2920	3275	3515	3945	-	-
10 Cyc.	2080	2560	3010	3465	3945	4290	4850	5115	5325
Static	3185	3920	4615	5310	6045	6575	7435	7840	8165

STD: Standard

Technologies

Block Pattern

Performance

Stability

Traction

High Load Capacity

Cut and Chip Resistance

Hard Surfaces

MULTIMAX MP 527

∅ 24"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	km/h - bar	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4
	400/80 R 24 IND	162 A8/B	DW 13	DW 12 ; DW 13 L ; DW 14 L	404	1250	578	3834	600	STD	Load capacity (kg/tire)														
											50	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-
											40	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-
											30	1985	2340	2750	3105	3460	3590	3770	4170	4515	4745	4860	5085	-	-
											25	2060	2430	2850	3220	3590	3725	3910	4330	4690	4925	5040	5275	-	-
											10 Cyc.	2280	2785	3280	3850	4350	4600	4845	5280	5845	6090	6330	6655	6810	7125
											Static	3500	4270	5030	5900	6670	7050	7430	8100	8960	9340	9710	10205	10445	10925
	440/80 R 24 IND	161 A8/B	DW 14 L	DW 13 ; DW 13 L ; DW 15 L	441	1314	601	3985	625	STD	km/h - bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
											50	2220	2640	3010	3425	3840	4120	4625	-	-					
											40	2220	2640	3010	3425	3840	4120	4625	-	-					
											30	2380	2825	3220	3665	4110	4410	4950	-	-					
											25	2465	2930	3340	3800	4265	4575	5135	-	-					
											10 Cyc.	2710	3335	3925	4515	5140	5590	6320	6665	6940					
											Static	4150	5110	6015	6920	7875	8570	9685	10215	10640					
	460/70 R 24 IND	159 A8/B	DW 15 L	DW 14 L ; DW 16 L	465	1254	574	3801	600	STD	km/h - bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
											50	2100	2495	2845	3240	3635	3895	4375	-	-					
											40	2100	2495	2845	3240	3635	3895	4375	-	-					
											30	2250	2675	3050	3470	3890	4170	4685	-	-					
											25	2335	2775	3160	3600	4035	4330	4860	-	-					
											10 Cyc	2565	3155	3710	4270	4860	5285	5975	6305	6565					
											Static	3930	4835	5690	6545	7450	8105	9160	9665	10065					
	500/70 R 24 IND	164 A8/B	DW 16 L	DW 15 L ; DW 18 L	503	1310	597	4019	625	STD	km/h - bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
											50	2400	2850	3250	3700	4150	4450	5000	-	-					
											40	2400	2850	3250	3700	4150	4450	5000	-	-					
											30	2570	3050	3480	3960	4445	4765	5350	-	-					
											25	2665	3165	3610	4110	4610	4940	5550	-	-					
											10 Cyc	2925	3600	4240	4875	5550	6040	6825	7200	7500					
											Static	4485	5520	6500	7475	8510	9260	10465	11040	11500					

∅ 26"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	km/h - bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6
	480/80 R 26 IND	160 A8/B	DW 15 L	DW 16 L	479	1428	642	4259	675	STD	Load capacity (kg/tire)										
											50	2610	3060	3330	3555	3780	4005	4275	4500	-	-
											40	2610	3060	3330	3555	3780	4005	4275	4500	-	-
											30	2795	3275	3565	3805	4045	4290	4575	4815	-	-
											25	2900	3400	3700	3950	4200	4450	4750	4995	-	-
											10 Cyc.	3175	3915	4255	4590	4995	5335	5670	6075	6415	6750
											Static	4865	6005	6525	7040	7660	8180	8695	9315	9835	10350

∅ 28"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	km/h - bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6
	440/80 R 28 IND	156 A8/B	DW 14 L	DW 13 ; DW 13 L ; DW 15 L	441	1415	648	4270	675	STD	Load capacity (kg/tire)										
											50	2300	2725	2940	3150	3360	3575	3790	4000	-	-
											40	2300	2725	2940	3150	3360	3575	3790	4000	-	-
											30	2480	2930	3155	3380	3605	3830	4055	4280	-	-
											25	2570	3040	3270	3505	3740	3970	4205	4440	-	-
											10 Cyc.	2840	3470	3790	4105	4420	4735	5050	5370	5685	6000
											Static	4360	5330	5810	6295	6780	7265	7750	8230	8715	9200

STD: Standard

Technologies

Block Pattern

Performance

Stability

Traction

High Load Capacity

Cut and Chip Resistance

Hard Surfaces

MULTIUSE

Radial



MULTIMAX MP 540

MULTIMAX MP 540 has been designed by BKT for multi-purpose vehicles in municipality/ maintenance applications. Thanks to the strong steel-belted nylon casing, MULTIMAX MP 540 allows to carry heavy loads at high speeds.

MULTIMAX
RADIAL MPT TIRES

∅ 20"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version		Load capacity (kg/tire) km/h - bar	4.0	4.5	5.0	5.5	6.0	6.5
	335/80 R 20	149 K	11	-	340	1044	492	3258	-	STD		110	2205	2420	2635	2845	3050	3250
												100	2205	2420	2635	2845	3050	3250
												90	2250	2470	2685	2900	3110	3315
												80	2290	2520	2740	2955	3170	3380
												70	2360	2595	2820	3045	3265	3480

STD: Standard

Technologies

Block Pattern

High Speed

All Steel

Performance

Stability

Durability

High Load Capacity



MULTIUSE

Radial



RT 747 AGRO INDUSTRIAL

RT 747 AGRO INDUSTRIAL is a radial agro-industrial tire suitable for backhoe loaders, compact loaders and telehandlers. Its extra wide lugs provide excellent grip and great stability in lift operations. RT 747 AGRO INDUSTRIAL is the right answer to all general farming operations that need outstanding versatility.

∅ 16"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	11L R 16	122 A8/8	W 8	W 10 L	290	850	-	-	-	STD

Load capacity (kg/tire)						
km/h - bar	1.2	1.6	2.0	2.2	2.4	2.6
10	1265	1530	1790	1920	2055	2200
30	940	1165	1385	1500	1610	-
40	880	1085	1295	1395	1500	-

∅ 24"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	460/70 R 24	152 A8/149 B	DW 15 L	DW 14 L ; DW 16 L	465	1254	556	3840	575	STD
	500/70 R 24	157 A8/154 B	DW 16 L	DW 15 L ; DW 18 L	485	1320	585	3949	625	STD

km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2
50	1530	1885	2210	2570	2985	3250
40	1670	2060	2415	2805	3160	3550
30	1785	2205	2585	3000	3380	3800
25	1850	2285	2680	3115	3505	3940
10 Cyc	2505	3090	3620	4205	4740	5325
Static	3505	4325	5070	5890	6635	7455

km/h - bar	1.2	1.6	2.0	2.4	2.8	3.0
50	1765	2175	2550	2965	3340	3750
40	1940	2395	2805	3260	3670	4125
30	2075	2560	3000	3490	3930	4415
25	2155	2655	3115	3620	4075	4580
10 Cyc	2910	3590	4210	4890	5510	6190
Static	4075	5025	5890	6845	7710	8665

STD: Standard

Technologies

Special Compound

Performance

Stability

Traction

High Load Capacity

Cut and Chip Resistance



Bias



CON STAR

CON STAR is particularly suitable for backhoe loaders, compact loaders and telehandlers in digging and loading applications. It features high load capacity along with excellent vertical and horizontal stability. CON STAR has been made of a cut-and-chip-resistant compound contributing to an extended tire life-cycle.

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 4.00
∅ 18"	340/80 - 18	11	12 ; 11 SDC ; 12 SDC ; W 10 ; W 11	350	1015	460	3075	IND	-	TL	143 A8		40	2725
∅ 20"	340/80 - 20	11	12 ; 11 SDC ; 12 SDC ; W 10 ; W 11	350	1065	491	3272	IND	-	TL	144 A8		km/h - bar	4.00
													40	2800
	380/75 - 20	W 12	W 11 ; 12 SDC ; 12 ; W 13 ; 13 SDC; 13	385	1080	500	3273	IND	-	TL	148 A8		km/h - bar	4.00
													40	3150
	400/70 - 20	13	12 SDC ; 13 SDC ; 14	405	1080	501	3303	IND	-	TL	156 A8		km/h - bar	5.00
													40	4000
	400/70 - 20	13	12 SDC ; 13 SDC ; 14	405	1080	501	3303	IND	16	TL	149 A8		km/h - bar	4.00
													40	3250
∅ 24"	400/70 - 24	13	DW 12 ; 13 SDC ; DW 13 ; DW 13 L ; DW 14 L	395	1175	544	-	IND	-	TL	158 A8		km/h - bar	5.00
													40	4250
	400/80 - 24	DW 13	DW 12 ; DW 13 L ; DW 14 L	405	1250	570	3781	IND	20	TL	162 A8		km/h - bar	5.00
													40	4750

IND: Industrial

Technologies

Special Compound

Performance

Stability

Traction

Cut and Chip Resistance

MULTIUSE

CON STAR

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	5.00
∅ 24"	**440/80 - 24**	DW 14 L	DW 13 ; DW 13 L ; DW 15 L	455	1315	610	3986	IND	22	TL	168 A8		40	5600
	460/70 - 24	DW 15 L	DW 14 L ; DW 16 L	460	1250	-	-	IND	-	TL	159 A8		km/h - bar	4.00
													40	4375
	500/70 - 24	DW 16 L	DW 15 L ; DW 18 L	505	1300	579	3926	IND	-	TL	164 A8		km/h - bar	4.00
													40	5000
∅ 26"	**480/80 - 26**	DW 15 L	DW 16 L	490	1410	643	4272	IND	-	TL	160 A8		km/h - bar	3.20
													40	4500
∅ 28"	**440/80 - 28**	DW 14 L	DW 13 ; DW 13 L ; DW 15 L	450	1420	632	4299	IND	-	TL	156 A8		km/h - bar	3.20
													40	4000

IND: Industrial

Technologies


Special Compound

Performance

Stability

Traction

Cut and Chip Resistance

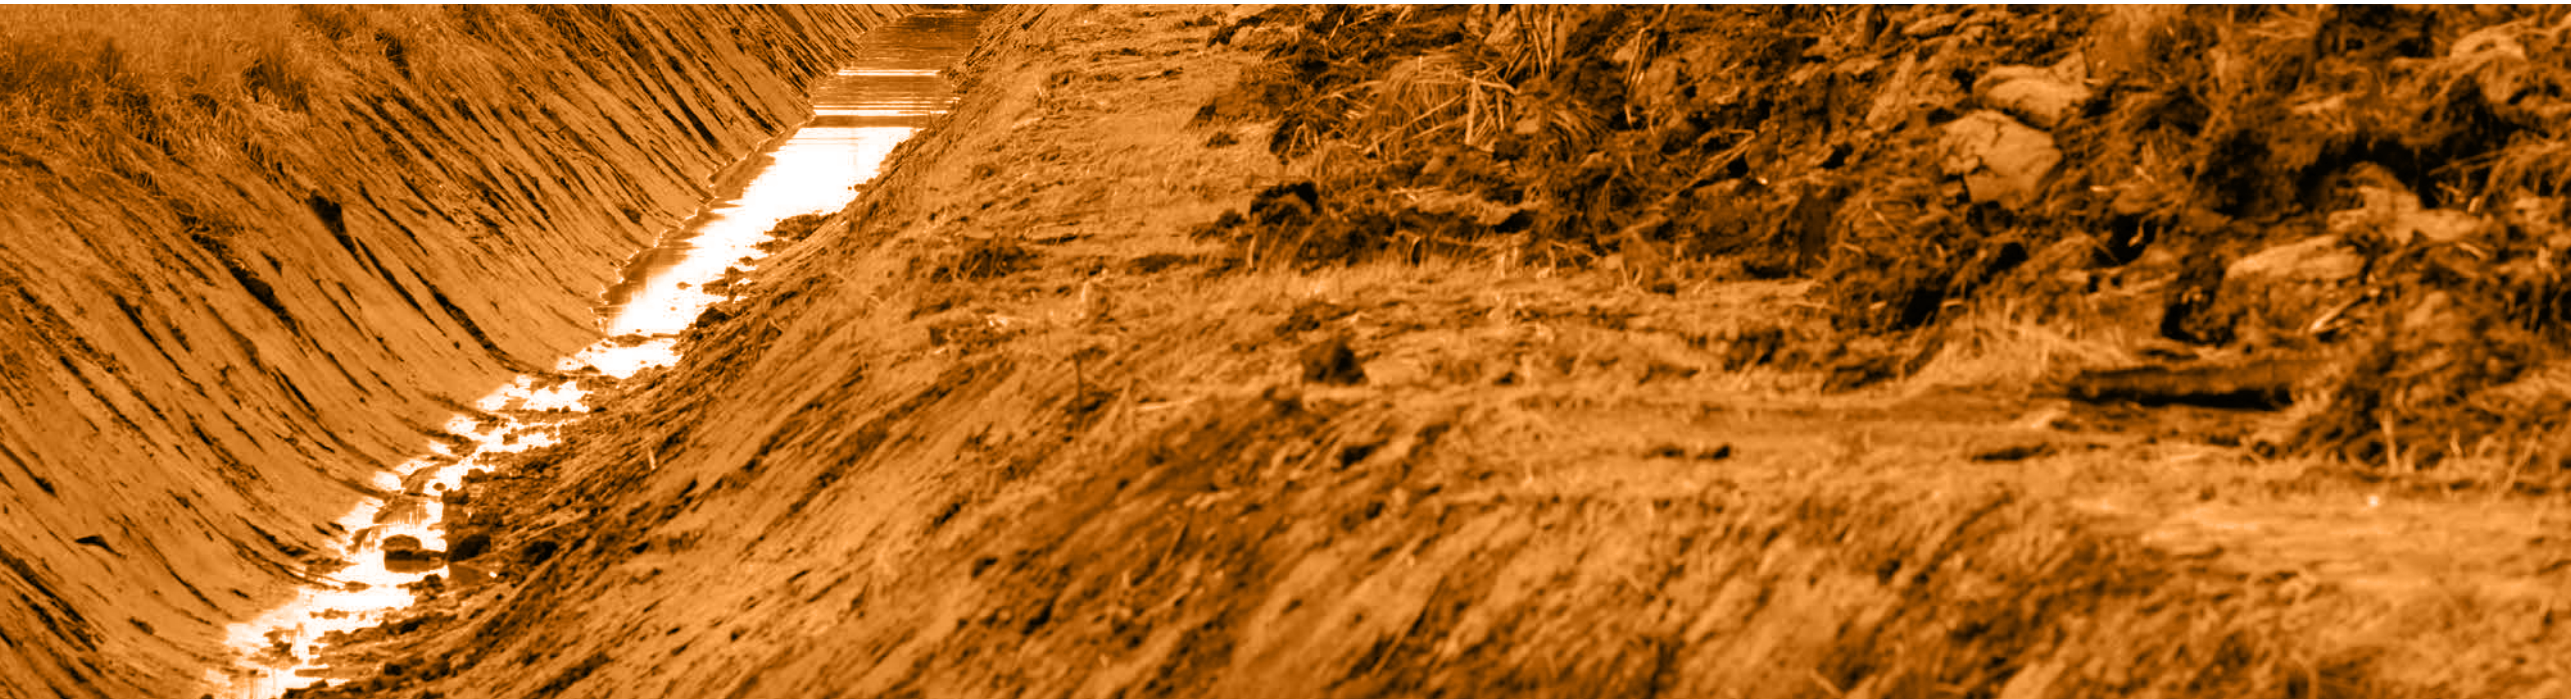

Bias



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.

∅ 12"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	2.40
	6.5/80 - 12	5 J	5 JA	163	608	273	1851	STD	4	TT	72 A8	84 A8	10 FR	700
													25 FR	595
													30 FR	560
													40 FR	500
													10 DW	495
													25 DW	420
													30 DW	400
													40 DW	355

													km/h - bar	2.40
	6.5/80 - 12	5 J	5 JA	163	608	273	1851	STD	4	TL	72 A8	84 A8	10 FR	700
													25 FR	595
													30 FR	560
													40 FR	500
													10 DW	495
													25 DW	420
													30 DW	400
													40 DW	355

													km/h - bar	3.60
	6.5/80 - 12	5 J	5 JA	163	608	273	1851	STD	6	TT	80 A8	93 A8	10 FR	910
													25 FR	775
													30 FR	730
													40 FR	650
													10 DW	630
													25 DW	535
													30 DW	505
													40 DW	450

													km/h - bar	3.60
	6.5/80 - 12	5 J	5 JA	163	608	273	1851	STD	6	TL	80 A8	93 A8	10 FR	910
													25 FR	775
													30 FR	730
													40 FR	650
													10 DW	630
													25 DW	535
													30 DW	505
													40 DW	450

STD: Standard

Technologies

Aramid Belted

Heavy Duty

Reinforced Carcass

Performance

Durability

Self-Cleaning

Traction

Stability

Cut and Chip Resistance

AS 504

∅ 12"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.60
	6.5/80 - 12	5 J	5 JA	163	608	273	1851	HD	6	TT	80 A8	93 A8		10 FR	910
														25 FR	775
														30 FR	730
														40 FR	650
														10 DW	630
														25 DW	535
														30 DW	505
														40 DW	450

														km/h - bar	1.70
	7.00 - 12	4.5	-	187	683	300	2001	STD	4	TT	75 A8	88 A8		10 FR	785
														25 FR	665
														30 FR	625
														40 FR	560
														10 DW	540
														25 DW	460
														30 DW	430
														40 DW	385

														km/h - bar	1.70
	7.00 - 12	4.5	-	187	683	300	2001	STD	4	TL	75 A8	88 A8		10 FR	785
														25 FR	665
														30 FR	625
														40 FR	560
														10 DW	540
														25 DW	460
														30 DW	430
														40 DW	385

														km/h - bar	2.50
	7.00 - 12	4.5	-	187	683	300	2001	STD	6	TL	83 A8	95 A8		10 FR	965
														25 FR	820
														30 FR	775
														40 FR	690
														10 DW	680
														25 DW	575
														30 DW	545
														40 DW	485

														km/h - bar	1.70
	7.00 - 12	4.5	-	187	683	300	2001	STD	6	TT	83 A8	95 A8		10 FR	785
														25 FR	665
														30 FR	625
														40 FR	560
														10 DW	540
														25 DW	460
														30 DW	430
														40 DW	385

STD: Standard - HD: Heavy Duty

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 12"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.30
	7.00 - 12	4.5	-	187	683	300	2001	AB	8	TL	88 A8	100 A8		10 FR	1120
														25 FR	950
														30 FR	895
														40 FR	800
														10 DW	785
														25 DW	665
														30 DW	625
														40 DW	560
	7.00 - 12	4.5	-	187	683	300	2001	SPL	8	TL	88 A8	100 A8		km/h - bar	3.30
														10 FR	1120
														25 FR	950
														30 FR	895
														40 FR	800
														10 DW	785
														25 DW	665
														30 DW	625
														40 DW	560
	10.0/80 - 12	9.00	7.0	270	730	335	2233	STD	10	TL	109 A8	121 A8		km/h - bar	3.90
														10 FR	2030
														25 FR	1725
														30 FR	1625
														40 FR	1450
														10 DW	1440
														25 DW	1225
														30 DW	1155
														40 DW	1030
	11.0/65 - 12	9.00	-	273	700	321	2072	STD	8	TT	101 A8	114 A8		km/h - bar	2.90
														10 FR	1650
														25 FR	1405
														30 FR	1320
														40 FR	1180
														10 DW	1155
														25 DW	980
														30 DW	925
														40 DW	825
	11.0/65 - 12	9.00	-	273	700	321	2072	STD	8	TL	101 A8	114 A8		km/h - bar	2.90
														10 FR	1650
														25 FR	1405
														30 FR	1320
														40 FR	1180
														10 DW	1155
														25 DW	980
														30 DW	925
														40 DW	825
	26 X 12.00 - 12	10.50 AT	8.0 AT ; 8.5 AT ; 9.0 AT	310	648	298	1932	STD	-	TL	112 A6			km/h - bar	3.0
														30	1120

STD: Standard - SPL: Special - AB Aramid Belted

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 15"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	2.30
	5.00 - 15	3.50 D	3.00 D; 4.00 E; 4 J	140	657	308	1957	STD	4	TT	67 A8	79 A8		10 FR	610
														25 FR	520
														30 FR	485
														40 FR	435
														10 DW	425
														25 DW	365
														30 DW	340
														40 DW	305

														km/h - bar	3.50
	5.00 - 15	3.50 D	3.00 D; 4.00 E; 4 J	140	657	308	1957	STD	6	TT	75 A8	88 A8		10 FR	785
														25 FR	665
														30 FR	625
														40 FR	560
														10 DW	540
														25 DW	460
														30 DW	430
														40 DW	385

														km/h - bar	3.50
	5.00 - 15	3.50 D	3.00 D; 4.00 E; 4 J	140	657	308	1957	STD	6	TL	75 A8	88 A8		10 FR	785
														25 FR	665
														30 FR	625
														40 FR	560
														10 DW	540
														25 DW	460
														30 DW	430
														40 DW	385

														km/h - bar	3.10
	7.5L - 15	6 LB	5 K; 5½ J; 5½ K	210	765	354	2280	STD	6	TT	97 A8	109 A8		10 FR	1440
														25 FR	1225
														30 FR	1155
														40 FR	1030
														10 DW	1020
														25 DW	870
														30 DW	820
														40 DW	730

														km/h - bar	3.70
	7.5L - 15	6 LB	5 K; 5½ J; 5½ K	210	765	354	2280	STD	8	TT	100 A8	113 A8		10 FR	1610
														25 FR	1370
														30 FR	1290
														40 FR	1150
														10 DW	1120
														25 DW	950
														30 DW	895
														40 DW	800

STD: Standard

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 15”	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.70
	7.5L - 15	6 LB	5K; 5½J; 5½K	210	765	354	2280	STD	8	TL	100 A8	113 A8		10 FR	1610
														25 FR	1370
														30 FR	1290
														40 FR	1150
														10 DW	1120
														25 DW	950
														30 DW	895
														40 DW	800
	7.5L - 15	6 LB	5K; 5½J; 5½K	210	765	354	2280	AB HD	8	TL	100 A8	113 A8		km/h - bar	3.70
														10 FR	1610
														25 FR	1370
														30 FR	1290
														40 FR	1150
														10 DW	1120
														25 DW	950
														30 DW	895
														40 DW	800
	7.5L - 15	6 LB	5K; 5½J; 5½K	210	765	354	2280	HD	8	TT	100 A8	113 A8		km/h - bar	3.70
														10 FR	1610
														25 FR	1370
														30 FR	1290
														40 FR	1150
														10 DW	1120
														25 DW	950
														30 DW	895
														40 DW	800
	400/50 - 15	13 LB	-	395	790	369	2387	STD	-	TL	109 A8	121 A8		km/h - bar	3.00
														10 FR	2030
														25 FR	1725
														30 FR	1625
														40 FR	1450
														10 DW	1440
														25 DW	1225
														30 DW	1155
														40 DW	1030
∅ 15.3”	10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	8	TT	106 A8	119 A8		km/h - bar	3.10
														10 FR	1905
														25 FR	1620
														30 FR	1525
														40 FR	1360
														10 DW	1330
														25 DW	1130
														30 DW	1065
														40 DW	950

STD: Standard - AB HD: Aramid Belted HD - HD: Heavy Duty

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 15.3"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.10
	10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	8	TL	106 A8	119 A8		10 FR	1905
														25 FR	1620
														30 FR	1525
														40 FR	1360
														10 DW	1330
														25 DW	1130
														30 DW	1065
														40 DW	950

														km/h - bar	3.10
	10.0/75 - 15.3	9.00	-	264	780	345	2285	IND	8	TL	106 A8	119 A8		10 FR	1905
														25 FR	1620
														30 FR	1525
														40 FR	1360
														10 DW	1330
														25 DW	1130
														30 DW	1065
														40 DW	950

														km/h - bar	3.90
	10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	10	TL	111 A8	123 A8		10 FR	2170
														25 FR	1845
														30 FR	1735
														40 FR	1550
														10 DW	1525
														25 DW	1295
														30 DW	1220
														40 DW	1090

														km/h - bar	5.50
	10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	14	TL	118 A8	130 A8		10 FR	2660
														25 FR	2260
														30 FR	2130
														40 FR	1900
														10 DW	1850
														25 DW	1570
														30 DW	1480
														40 DW	1320

														km/h - bar	7.10
	10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	18	TT	122 A8	135 A8		10 FR	3050
														25 FR	2595
														30 FR	2440
														40 FR	2180
														10 DW	2100
														25 DW	1785
														30 DW	1680
														40 DW	1500

STD: Standard - IND: Industrial

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 15.3"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	7.10
	10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	18	TL	122 A8	135 A8		10 FR	3050
														25 FR	2595
														30 FR	2440
														40 FR	2180
														10 DW	2100
														25 DW	1785
														30 DW	1680
														40 DW	1500

														km/h - bar	2.70
	11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	8	TT	114 A8	126 A8		10 FR	2380
														25 FR	2025
														30 FR	1905
														40 FR	1700
														10 DW	1650
														25 DW	1405
														30 DW	1320
														40 DW	1180

														km/h - bar	2.70
	11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	8	TL	114 A8	126 A8		10 FR	2380
														25 FR	2025
														30 FR	1905
														40 FR	1700
														10 DW	1650
														25 DW	1405
														30 DW	1320
														40 DW	1180

														km/h - bar	3.40
	11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	10	TL	119 A8	131 A8		10 FR	2730
														25 FR	2320
														30 FR	2185
														40 FR	1950
														10 DW	1905
														25 DW	1620
														30 DW	1525
														40 DW	1360

														km/h - bar	4.10
	11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	12	TT	123 A8	135 A8		10 FR	3050
														25 FR	2595
														30 FR	2440
														40 FR	2180
														10 DW	2170
														25 DW	1845
														30 DW	1735
														40 DW	1550

STD: Standard

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 15.3"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 4.10
	11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	12	TL	123 A8	135 A8		**10 FR**	3050
														25 FR	2595
														30 FR	2440
														40 FR	2180
														10 DW	2170
														25 DW	1845
														30 DW	1735
														40 DW	1550

														km/h - bar	4.10
	11.5/80 - 15.3	9.00	-	290	867	380	2540	SR	12	TL	123 A8	135 A8		**10 FR**	3050
														25 FR	2595
														30 FR	2440
														40 FR	2180
														10 DW	2170
														25 DW	1845
														30 DW	1735
														40 DW	1550

														km/h - bar	4.80
	11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	14	TT	126 A8	139 A8		**10 FR**	3400
														25 FR	2890
														30 FR	2720
														40 FR	2430
														10 DW	2380
														25 DW	2025
														30 DW	1905
														40 DW	1700

														km/h - bar	4.80
	11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	14	TL	126 A8	139 A8		**10 FR**	3400
														25 FR	2890
														30 FR	2720
														40 FR	2430
														10 DW	2380
														25 DW	2025
														30 DW	1905
														40 DW	1700

														km/h - bar	3.10
	27 X 10 - 15.3	9.00	-	260	695	317	2071	STD	8	TT	95 A8	107 A8		**10 FR**	1365
														25 FR	1160
														30 FR	1090
														40 FR	975
														10 DW	965
														25 DW	820
														30 DW	775
														40 DW	690

STD: Standard - SR: Stubble Resistant

Technologies

- *Aramid Belted*
- *Heavy Duty*
- *Reinforced Carcass*

Performance

- *Durability*
- *Self-Cleaning*
- *Traction*
- *Stability*
- *Cut and Chip Resistance*

AS 504

∅ 15.3"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.10
	27 X 10 - 15.3	9.00	-	260	695	317	2071	STD	8	TL	95 A8	107 A8		10 FR	1365
														25 FR	1160
														30 FR	1090
														40 FR	975
														10 DW	965
														25 DW	820
														30 DW	775
														40 DW	690

∅ 16"														km/h - bar	2.80
	4.00 - 16	3.00 D	2.50 C	110	628	-	-	STD	4	TT	66 A8	78 A8		10 FR	595
														25 FR	505
														30 FR	475
														40 FR	425
														10 DW	420
														25 DW	355
														30 DW	335
														40 DW	300

														km/h - bar	2.80
	6.00 - 16	4.00 E	4.50 E ; 4½ K	164	735	343	2190	STD	6	TT	83 A8	95 A8		10 FR	965
														25 FR	820
														30 FR	775
														40 FR	690
														10 DW	680
														25 DW	575
														30 DW	545
														40 DW	485

														km/h - bar	2.80
	6.00 - 16	4.00 E	4.50 E ; 4½ K	164	735	343	2190	HD	6	TT	83 A8	95 A8		10 FR	965
														25 FR	820
														30 FR	775
														40 FR	690
														10 DW	680
														25 DW	575
														30 DW	545
														40 DW	485

														km/h - bar	4.00
	6.00 - 16	4.00 E	4.50 E ; 4½ K	164	735	343	2190	HD	8	TT	91 A8	103 A8		10 FR	1225
														25 FR	1040
														30 FR	980
														40 FR	875
														10 DW	860
														25 DW	730
														30 DW	690
														40 DW	615

STD: Standard - HD: Heavy Duty

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	2.30
	7.50 - 16	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	STD	6	TT	92 A8	104 A8		**10 FR**	1260
														25 FR	1070
														30 FR	1010
														40 FR	900
														10 DW	880
														25 DW	750
														30 DW	705
														40 DW	630
	7.50 - 16	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB 6.00 F	209	803	372	2393	STD	8	TT	99 A8	112 A8		**km/h - bar**	**3.20**
														10 FR	1570
														25 FR	1335
														30 FR	1255
														40 FR	1120
														10 DW	1085
														25 DW	920
														30 DW	870
														40 DW	775
	7.50 - 16	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	STD	8	TL	99 A8	112 A8		**km/h - bar**	**3.20**
														10 FR	1570
														25 FR	1335
														30 FR	1255
														40 FR	1120
														10 DW	1085
														25 DW	920
														30 DW	870
														40 DW	775
	7.50 - 16	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	HD	8	TT	99 A8	112 A8		**km/h - bar**	**3.20**
														10 FR	1570
														25 FR	1335
														30 FR	1255
														40 FR	1120
														10 DW	1085
														25 DW	920
														30 DW	870
														40 DW	775
	9.0/70 - 16	W 7	-	222	760	355	2285	STD	10	TL	106 A8	119 A8		**km/h - bar**	**4.40**
														10 FR	1905
														25 FR	1620
														30 FR	1525
														40 FR	1360
														10 DW	1330
														25 DW	1130
														30 DW	1065
														40 DW	950

STD: Standard - HD: Heavy Duty

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.90
	270/75 - 16	9.00	-	250	810	-	-	STD	-	TL	111 A8	123 A8		10 FR	2170
														25 FR	1845
														30 FR	1735
														40 FR	1550
														10 DW	1525
														25 DW	1295
														30 DW	1220
														40 DW	1090

∅ 17"														km/h - bar	2.60
	15.0/55 - 17	13.00	13	380	890	395	2608	STD	10	TL	122 A8	134 A8		10 FR	2970
														25 FR	2525
														30 FR	2375
														40 FR	2120
														10 DW	2100
														25 DW	1785
														30 DW	1680
														40 DW	1500

														km/h - bar	3.60
	15.0/55 - 17	13.00	13	380	890	395	2608	STD	14	TL	129 A8	141 A8		10 FR	3605
														25 FR	3065
														30 FR	2885
														40 FR	2575
														10 DW	2590
														25 DW	2200
														30 DW	2070
														40 DW	1850

														km/h - bar	2.80
	19.0/45 - 17	16.00	-	465	865	389	2578	STD	14	TL	131 A8	144 A8		10 FR	3920
														25 FR	3330
														30 FR	3135
														40 FR	2800
														10 DW	2730
														25 DW	2320
														30 DW	2185
														40 DW	1950

														km/h - bar	3.00
	420/55 - 17	13.00	-	430	910	407	2712	STD	14	TL	129 A8	142 A8		10 FR	3710
														25 FR	3155
														30 FR	2970
														40 FR	2650
														10 DW	2590
														25 DW	2200
														30 DW	2070
														40 DW	1850

STD: Standard

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 17"

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	
420/55 - 17	13.00	-	430	910	407	2712	STD	16	TL	133 A8	145 A8	

Load capacity (kg/tire)	
km/h - bar	3.50
10 FR	4060
25 FR	3450
30 FR	3250
40 FR	2900
10 DW	2885
25 DW	2450
30 DW	2305
40 DW	2060

∅ 18"

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	
7.50 - 18	5.50 F	4.50 E ; 6.00 F ; 5.00 F	209	854	407	2649	STD	6	TT	94 A8	106 A8	

km/h - bar	2.30
10 FR	1330
25 FR	1130
30 FR	1065
40 FR	950
10 DW	940
25 DW	795
30 DW	750
40 DW	670

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	
7.50 - 18	5.50 F	4.50 E ; 6.00 F ; 5.00 F	209	854	407	2649	STD	8	TT	101 A8	114 A8	

km/h - bar	3.10
10 FR	1650
25 FR	1405
30 FR	1320
40 FR	1180
10 DW	1155
25 DW	980
30 DW	925
40 DW	825

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	
10.5/80 - 18	W 9	9 ; W 8	274	907	405	2657	STD	10	TL	119 A8	131 A8	

km/h - bar	3.70
10 FR	2730
25 FR	2320
30 FR	2185
40 FR	1950
10 DW	1905
25 DW	1620
30 DW	1525
40 DW	1360

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	
12.5/80 - 18	W 9	9 ; 11	308	987	438	2892	STD	12	TL	129 A8	142 A8	

km/h - bar	3.70
10 FR	3710
25 FR	3155
30 FR	2970
40 FR	2650
10 DW	2590
25 DW	2200
30 DW	2070
40 DW	1850

STD: Standard

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 18"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.70
	12.5/80 - 18	W 9	9 ; 11	308	987	438	2892	SPL	12	TL	129 A8	142 A8		10 FR	3710
														25 FR	3155
														30 FR	2970
														40 FR	2650
														10 DW	2590
														25 DW	2200
														30 DW	2070
														40 DW	1850
														km/h - bar	4.90
	12.5/80 - 18	W 9	9 ; 11	308	987	438	2892	STD	16	TL	135 A8	148 A8		10 FR	4410
														25 FR	3750
														30 FR	3530
														40 FR	3150
														10 DW	3050
														25 DW	2595
														30 DW	2440
														40 DW	2180
														km/h - bar	5.50
	12.5/80 - 18	W 9	9 ; 11	308	987	438	2892	STD	18	TL	138 A8	150 A8		10 FR	4690
														25 FR	3985
														30 FR	3750
														40 FR	3350
														10 DW	3305
														25 DW	2810
														30 DW	2645
														40 DW	2360
∅ 20"	**7.50 - 20**	5.50 F	4.50 E ; 6.00 F ; 5.00 F	209	904	422	2695	STD	8	TT	103 A8	116 A8		km/h - bar	3.20
														10 FR	1750
														25 FR	1490
														30 FR	1400
														40 FR	1250
														10 DW	1225
														25 DW	1040
														30 DW	980
														40 DW	875
	16.0/70 - 20	13	12 SDC ; 14 ; 13 SDC	408	1097	487	3214	STD	10	TL	135 A8	147 A8		km/h - bar	2.50
														10 FR	4305
														25 FR	3660
														30 FR	3445
														40 FR	3075
														10 DW	3050
														25 DW	2595
														30 DW	2440
														40 DW	2180

STD: Standard - SPL: Special

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 20"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.00
	16.0/70 - 20	13	12 SDC ; 14 ; 13 SDC	408	1097	487	3214	STD	12	TL	139 A8	151 A8		10 FR	4830
														25 FR	4105
														30 FR	3865
														40 FR	3450
														10 DW	3400
														25 DW	2890
														30 DW	2720
														40 DW	2430
	16.0/70 - 20	13	12 SDC ; 14 ; 13 SDC	408	1097	487	3214	STD	14	TL	142 A8	154 A8		km/h - bar	3.50
														10 FR	5250
														25 FR	4465
														30 FR	4200
														40 FR	3750
														10 DW	3710
														25 DW	3155
														30 DW	2970
														40 DW	2650
	16.0/70 - 20	13	12 SDC ; 14 ; 13 SDC	408	1097	487	3214	STD	16	TL	144 A8	156 A8		km/h - bar	4.00
														10 FR	5600
														25 FR	4760
														30 FR	4480
														40 FR	4000
														10 DW	3920
														25 DW	3330
														30 DW	3135
														40 DW	2800
	400/70 - 20	13	12 SDC ; 14 ; 13 SDC	408	1097	487	3214	IND	-	TL	149 A8			km/h - bar	4.00
														10	4060
														25	3445
														30	3380
														40	3250
∅ 24"	**15.5/80 - 24**	W 12	W 13 ; W 14 L	384	1262	566	3655	STD	10	TL	142 A8	154 A8		km/h - bar	2.50
														10 FR	5250
														25 FR	4465
														30 FR	4200
														40 FR	3750
														10 DW	3710
														25 DW	3155
														30 DW	2970
														40 DW	2650

STD: Standard - IND: Industrial

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 24"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.00
	15.5/80 - 24	W 12	W 13 ; W 14 L	384	1262	566	3655	STD	12	TL	145 A8	157 A8		10 FR	5775
														25 FR	4910
														30 FR	4620
														40 FR	4125
														10 DW	4060
														25 DW	3450
														30 DW	3250
														40 DW	2900
	15.5/80 - 24	W 12	W 13 ; W 14 L	384	1262	566	3655	STD	14	TL	148 A8	160 A8		km/h - bar	3.50
														10 FR	6300
														25 FR	5355
														30 FR	5040
														40 FR	4500
														10 DW	4410
														25 DW	3750
														30 DW	3530
														40 DW	3150
	15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	SPL	14	TL	148 A8	160 A8		km/h - bar	3.50
														10 FR	6300
														25 FR	5355
														30 FR	5040
														40 FR	4500
														10 DW	4410
														25 DW	3750
														30 DW	3530
														40 DW	3150
	15.5/80 - 24	W 12	W 13 ; W 14 L	384	1262	566	3655	STD	16	TL	151 A8	163 A8		km/h - bar	4.00
														10 FR	6825
														25 FR	5800
														30 FR	5460
														40 FR	4875
														10 DW	4830
														25 DW	4105
														30 DW	3865
														40 DW	3450
	16.5/85 - 24	W 13	W 14 L ; W 15 L	415	1325	591	3837	STD	10	TL	146 A8	158 A8		km/h - bar	2.40
														10 FR	5950
														25 FR	5060
														30 FR	4760
														40 FR	4250
														10 DW	4200
														25 DW	3570
														30 DW	3360
														40 DW	3000

STD: Standard - SPL: Special

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 24"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	2.80
	16.5/85 - 24	W 13	W 14 L ; W 15 L	415	1325	591	3837	STD	12	TL	151 A8	163 A8		**10 FR**	6825
														25 FR	5800
														30 FR	5460
														40 FR	4875
														10 DW	4830
														25 DW	4105
														30 DW	3865
														40 DW	3450

														km/h - bar	**3.80**
	16.5/85 - 24	W 13	W 14 L ; W 15 L	415	1325	591	3837	STD	16	TT	155 A8	168 A8		**10 FR**	7840
														25 FR	6665
														30 FR	6270
														40 FR	5600
														10 DW	5425
														25 DW	4610
														30 DW	4340
														40 DW	3875

														km/h - bar	**3.80**
	16.5/85 - 24	W 13	W 14 L ; W 15 L	415	1325	591	3837	STD	16	TL	155 A8	168 A8		**10 FR**	7840
														25 FR	6665
														30 FR	6270
														40 FR	5600
														10 DW	5425
														25 DW	4610
														30 DW	4340
														40 DW	3875

														km/h - bar	**3.80**
	400/80 - 24	W 13	W 12 ; W 14 L	394	1262	566	3655	IND	-	TL	156 A8			**10**	5000
														25	4240
														30	4160
														40	4000

														km/h - bar	**5.00**
	400/80 - 24	W 13	W 12 ; W 14 L	394	1262	566	3655	IND	-	TL	162 A8			**10**	5940
														25	5035
														30	4940
														40	4750

STD: Standard - IND: Industrial

Technologies

Aramid Belted

Heavy Duty

Reinforced Carcass

Performance

Durability

Self-Cleaning

Traction

Stability

Cut and Chip Resistance

Bias



AT 603

AT 603 is a bias agro-industrial tire for backhoe loaders, compact loaders and compact dumpers in digging and loading applications. AT 603 has been engineered to ensure great traction on drive wheels providing the best performance on and off the road. The AT 603 "special" version offers improved cut and chip resistance while the "HD" version is ideal for heavy-duty service.

∅ 18"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	3.70
	10.5/80 - 18	W 9	W 8 ; 9	274	907	405	2657	STD	10	TL	119 A8	131 A8	10 FR	2730
													25 FR	2320
													30 FR	2185
													40 FR	1950
													10 DW	1905
													25 DW	1620
													30 DW	1525
													40 DW	1360

													km/h - bar	3.70
	10.5/80 - 18	W 9	W 8 ; 9	274	907	405	2657	HD	10	TL	119 A8	131 A8	10 FR	2730
													25 FR	2320
													30 FR	2185
													40 FR	1950
													10 DW	1905
													25 DW	1620
													30 DW	1525
													40 DW	1360

													km/h - bar	3.70
	10.5/80 - 18	W 9	W 8 ; 9	274	907	405	2657	SPL	10	TL	119 A8	131 A8	10 FR	2730
													25 FR	2320
													30 FR	2185
													40 FR	1950
													10 DW	1905
													25 DW	1620
													30 DW	1525
													40 DW	1360

													km/h - bar	3.70
	12.5/80 - 18	W 9	11	308	987	448	3027	STD	12	TL	129 A8	142 A8	10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
													10 DW	2590
													25 DW	2200
													30 DW	2070
													40 DW	1850

STD: Standard - SPL: Special - HD: Heavy Duty

Technologies

Heavy Duty

Reinforced Carcass

Performance

Durability

Traction

Self-Cleaning

Cut and Chip Resistance

MULTIUSE

AT 603

∅ 18"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.70
	12.5/80 - 18	W 9	11	308	987	448	3027	SPL	12	TL	129 A8	142 A8		10 FR	3710
														25 FR	3155
														30 FR	2970
														40 FR	2650
														10 DW	2590
														25 DW	2200
														30 DW	2070
														40 DW	1850

														km/h - bar	4.90
	12.5/80 - 18	W 9	11	308	987	448	3027	STD	16	TL	135 A8	148 A8		10 FR	4410
														25 FR	3750
														30 FR	3530
														40 FR	3150
														10 DW	3050
														25 DW	2595
														30 DW	2440
														40 DW	2180

														km/h - bar	5.50
	12.5/80 - 18	W 9	11	308	987	448	3027	STD	18	TL	138 A8	150 A8		10 FR	4690
														25 FR	3985
														30 FR	3750
														40 FR	3350
														10 DW	3305
														25 DW	2810
														30 DW	2645
														40 DW	2360

∅ 25"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	2.50	4.00	2.50
	15.5 - 25	12.00/ 1.3	12.00/ 1.3 (DC)	410	1265	577	3861	STD	12	TL	-	-		50	3250	-	-
														10	-	5600	-
														40	-	-	2650

STD: Standard - SPL: Special

Technologies

Heavy Duty

Reinforced Carcass

Performance

Durability

Traction

Self-Cleaning

Cut and Chip Resistance



Bias



AT 621

AT 621 is suitable for backhoe loaders and compact loaders in all digging and loading operations in agriculture. The AT 621 tire features an extra deep tread which ensures great cut and chip resistance and higher durability. In addition, this BKT tire ensures great durability and self cleaning properties. AT 621 is available in several versions to meet the most differing user requirements.

∅ 15"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 3.25
	33 X 12.5 - 15	10.00 F SDC	-	318	851	385	2493	STD	8	TT	-	-		10	2130

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		km/h - bar	3.70
	9.00 - 16	6.50 H	6.00 G	260	925	-	-	IND	16	TT	137 A6			10 FR	3710
														25 FR	3155
														30 FR	2970
														40 FR	2650
														10 DW	2590
														25 DW	2200
														30 DW	2070
														40 DW	1850
	12.5/70 - 16	10 LB	-	315	855	385	2584	STD	8	TL	-	-		km/h - bar	4.4
														10	2240
	12.5/70 - 16	10 LB	-	315	855	385	2584	STD	14	TL	-	-		km/h - bar	4.4
														10	2240
	12.5/70 - 16	10 LB	-	315	855	385	2584	STD	14	TT	-	-		km/h - bar	4.4
														10	1645

STD: Standard - IND: Industrial

Performance

Durability

Traction

Self-Cleaning

Cut and Chip Resistance

AT 621

∅ 18"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.70
	12.5/80 - 18	W 9	11.0	308	987	446	2950	STD	12	TT	129 A8	142 A8		10 FR	3710
														25 FR	3155
														30 FR	2970
														40 FR	2650
														10 DW	2590
														25 DW	2200
														30 DW	2070
														40 DW	1850
	12.5/80 - 18	W 9	11.0	308	987	446	2950	STD	12	TL	129 A8	142 A8		km/h - bar	3.70
														10 FR	3710
														25 FR	3155
														30 FR	2970
														40 FR	2650
														10 DW	2590
														25 DW	2200
														30 DW	2070
														40 DW	1850
	12.5/80 - 18	W 9	11	308	987	446	2950	SPL	12	TL	129 A8	142 A8		km/h - bar	3.70
														10 FR	3710
														25 FR	3155
														30 FR	2970
														40 FR	2650
														10 DW	2590
														25 DW	2200
														30 DW	2070
														40 DW	1850
	12.5/80 - 18	W 9	11.0	308	987	446	2950	STD	16	TL	135 A8	148 A8		km/h - bar	4.90
														10 FR	4410
														25 FR	3750
														30 FR	3530
														40 FR	3150
														10 DW	3050
														25 DW	2595
														30 DW	2440
														40 DW	2180
	12.5/80 - 18	W 9	11.0	308	987	446	2950	STD	16	TL	135 A8	148 A8		km/h - bar	4.90
														10 FR	4410
														25 FR	3750
														30 FR	3530
														40 FR	3150
														10 DW	3050
														25 DW	2595
														30 DW	2440
														40 DW	2180

STD: Standard - SPL: Special

Performance

Durability

Traction

Self-Cleaning

Cut and Chip Resistance

AT 621

∅ 18"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire)	
														km/h - bar	4.90
	12.5/80 - 18	W 9	11.0	308	987	446	2950	IND HD	16	TT	135 A8	148 A8		10 FR	4410
														25 FR	3750
														30 FR	3530
														40 FR	3150
														10 DW	3050
														25 DW	2595
														30 DW	2440
														40 DW	2180
	15.5/60 - 18	W 13	-	400	950	428	2871	STD	10	TL	139 A8			km/h - bar	**2.60**
														10	2430
	15.5/60 - 18	W 13	-	400	950	428	2871	STD	12	-	141 A2			km/h - bar	**3.00**
														10	2575
	15.5/80 - 18	W 13	-	400	1030	474	3111	STD	10	TL	-	-		km/h - bar	**3.70**
														10 FR	3710
														25 FR	3155
														30 FR	2970
														40 FR	2650
														10 DW	2590
														25 DW	2200
														30 DW	2070
														40 DW	1850
∅ 20"	**12.5 - 20**	11.0	-	325	1040	-	-	STD	12	TT	-	-		km/h - bar	**3.50**
														40 FR	3350
														40 DW	2300
	17.5/65 - 20	W 14 L	-	450	1090	490	3294	STD	10	TL	-	-		km/h - bar	**2.40**
														10	3195
	42 X 17 - 20	14.00 TG SDC	-	432	1073	480	3198	STD	10	TT	-	-		km/h - bar	**3.00**
														10	3690
	400/70 - 20	W 13	12 SDC ; 13 SDC ; 14	405	1090	499	3229	STD	-	TL	149 A8			km/h - bar	**4.00** / **5.00**
														50	3550 / –
														10	- / 5600
	400/70 - 20	13	12 SDC ; 13 SDC ; 14	405	1090	499	3229	STD	-	TL	152 B/168 A2			km/h - bar	**4.00**
														40	3250
∅ 24"	**16.9 - 24**	DW 15 L	DW 14 L	450	1302	582	3776	IND	12	TL	156 A8			km/h - bar	**2.60**
														40	3250
	17.5L - 24	DW 15 L	DW 14 L	450	1255	558	3752	STD	8	TL	139 A8			km/h - bar	**1.70**
														40	2430
	19.5L - 24	DW 16 L	-	482	1305	587	3936	STD	12	TL	151 A8			km/h - bar	**2.30**
														40	3450

STD: Standard - IND: Industrial - IND HD: Industrial HD

Performance

- Durability
- Traction
- Self-Cleaning
- Cut and Chip Resistance

MULTIUSE

AT 621

∅	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	2.50
∅ 26"	18.4 - 26	DW 16 L	DW 15 L	480	1425	639	4133	STD	12	TL	156	A8	40	4000
∅ 28"	16.9 - 28	DW 15 L	DW 14 L	450	1410	639	4199	IND	12	TT	152	A8	km/h - bar	2.60
													40	3550
	16.9 - 28	DW 15 L	DW 14 L	450	1410	639	4199	IND	12	TL	152	A8	km/h - bar	2.60
													40	3550
	16.9 - 28	DW 15 L	DW 14 L	450	1410	639	4199	IND	12	TT	152	A8	km/h - bar	2.60
													40	3550
	16.9 - 28	DW 15 L	DW 14 L	450	1410	639	4199	IND	12	TL	152	A8	km/h - bar	2.60
													40	3550
∅ 30"	16.9 - 30	DW 15 L	DW 14 L	450	1460	670	4398	IND	12	TL	153	A8	km/h - bar	2.60
													40	3650

STD: Standard - IND: Industrial

Performance

- Durability
- Traction
- Self-Cleaning
- Cut and Chip Resistance



Bias



MP 567

MP 567 is an agro-industrial tire suitable for field and road transport, municipality/ maintenance operations as well as soil tillage applications depending on the tire size. The MP 567 tire provides good traction in all the weather conditions as well as excellent self-cleaning properties.

∅ 15"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	4.10
	11.5/80 - 15	8 LB	-	290	875	-	-	STD	12	TL	-	-	30	2440
													40	2180
∅ 15.3"	10.0/75 - 15.3	9.0	-	258	774	355	2310	STD	10	TL	-	-	km/h - bar	3.90
													30	1735
													40	1550
	10.0/75 - 15.3	9.0	-	258	774	355	2310	IMP	10	TL	111 A8	123 A8	km/h - bar	3.90
													40 FR	1550
													40 DW	1090
	10.0/75 - 15.3	9.0	-	258	774	355	2310	STD	12	TL	-	-	km/h - bar	4.70
													30	1905
													40	1700
	10.0/75 - 15.3	9.0	-	258	774	355	2310	IMP	12	TL	114 A8	126 A8	km/h - bar	4.70
													40 FR	1700
													40 DW	1180
	10.0/75 - 15.3	9.0	-	258	774	355	2310	STD	14	TL	-	-	km/h - bar	5.50
													30	2130
													40	1900
	10.0/75 - 15.3	9.0	-	258	774	355	2310	IMP	14	TL	118 A8	130 A8	km/h - bar	5.50
													40 FR	1900
													40 DW	1320

Performance

Durability

Traction

Self-Cleaning

Comfort

STD: Standard - IMP: Implement

MP 567

∅ 15.3"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire)	7.10
														km/h - bar	
	10.0/75 - 15.3	9.0	-	258	774	355	2310	STD	18	TL	-	-		30	2440
														40	2180
	10.0/75 - 15.3	9.0	-	258	774	355	2310	IMP	18	TL	123 A8	135 A8		km/h - bar	5.50
														40 FR	2180
														40 DW	1550
	11.5/80 - 15.3	9.0	-	292	868	393	2578	STD	10	TL	-	-		km/h - bar	3.40
														30	2185
														40	1950
	11.5/80 - 15.3	9.0	-	292	868	393	2578	IMP	10	TL	119 A8	131 A8		km/h - bar	3.40
														40 FR	1950
														40 DW	1360
	11.5/80 - 15.3	9.0	-	292	868	393	2578	STD	14	TL	-	-		km/h - bar	4.75
														30	2720
														40	2430
	11.5/80 - 15.3	9.0	-	292	868	393	2578	IMP	14	TL	126 A8	139 A8		km/h - bar	4.75
														40 FR	2430
														40 DW	1700
	11.5/80 - 15.3	9.0	-	292	868	393	2578	STD	18	TL	-	-		km/h - bar	6.00
														30	3050
														40	2725
	11.5/80 - 15.3	9.0	-	292	868	393	2578	IMP	18	TL	130 A8	143 A8		km/h - bar	6.00
														40 FR	2725
														40 DW	1900
∅ 18"	10.5 - 18	9	9 SDC	270	905	415	2768	STD	10	TT	-	-		km/h - bar	3.75
														90	1700
														40	1955

Performance

Durability

Traction

Self-Cleaning

Comfort

STD: Standard - IMP: Implement

MP 567

∅ 18"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	3.75
	10.5 - 18	9	9 SDC	270	905	415	2768	STD	10	TL	-	-	90	1700
													40	1955
	10.5 - 18	9	9 SDC	270	905	415	2768	STD	12	TL	-	-	km/h - bar	4.50
													90	1900
													40	2190
	10.5 - 18	9	9 SDC	270	905	415	2768	SPL	12	TL	-	-	km/h - bar	4.50
													90	1900
													40	2190
	12.5 - 18	11	12 SDC	325	990	450	2940	STD	10	TT	-	-	km/h - bar	3.00
													90	1800
													40	2070
	12.5 - 18	11	12 SDC	325	990	450	2940	STD	10	TL	-	-	km/h - bar	3.00
													90	1800
													40	2070
	12.5 - 18	11	12 SDC	325	990	450	2940	STD	12	TT	-	-	km/h - bar	3.50
													90	1950
													40	2245
	12.5 - 18	11	12 SDC	325	990	450	2940	STD	12	TL	-	-	km/h - bar	3.50
													90	1950
													40	2245
	12.5 - 18	11	12 SDC	325	990	450	2940	STD	16	TL	-	-	km/h - bar	4.50
													90	2250
													40	2585
∅ 19.5"	18 - 19.5	14.00	-	460	1104	498	3280	STD	14	TL	-	-	km/h - bar	4.75
													50	3925
													40	4150

Performance

Durability

Traction

Self-Cleaning

Comfort

STD: Standard - SPL: Special

MP 567

∅ 19.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	6.00
	18 - 19.5	14.00	-	460	1104	498	3280	STD	16	TL	-		**50**	4500
													40	4700
	18 - 19.5 IND	14.00	-	460	1104	498	3280	IND	16	TL	160 B / 162 A8		**km/h - bar**	**6.00**
													50	4500
													40	4700
	18 - 19.5	14.00	-	460	1104	498	3280	STD	18	TL	-		**km/h - bar**	**7.25**
													50	5150
													40	5460
	18 - 19.5 IND	14.00	-	460	1104	498	3280	STD	18	TL	165 B / 167 A8		**km/h - bar**	**7.25**
													50	5150
													40	5460
∅ 20"	**10.5 - 20**	9	9 SDC	270	955	445	2880	STD	10	TT	-		**km/h - bar**	**3.75**
													90	1800
													40	2070
	10.5 - 20	9	9 SDC	270	955	445	2880	STD	10	TL	-		**km/h - bar**	**3.75**
													90	1800
													40	2070
	12.5 - 20	11.0	12 SDC	325	1040	475	3090	STD	10	TT	-		**km/h - bar**	**3.00**
													90	1850
													40	2130
	12.5 - 20	11.0	12 SDC	325	1040	475	3090	STD	10	TL	-		**km/h - bar**	**3.00**
													90	1850
													40	2130
	12.5 - 20	11.0	12 SDC	325	1040	475	3090	HD	10	TL	-		**km/h - bar**	**3.00**
													90	1850
													40	2130

Performance

- Durability
- Traction
- Self-Cleaning
- Comfort

STD: Standard - IND: Industrial - HD: Heavy Duty

MP 567

∅ 20" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	3.50
12.5 - 20	11.0	12 SDC	325	1040	475	3090	STD	12	TT	-		90	2000
												40	2300
12.5 - 20	11.0	12 SDC	325	1040	475	3090	STD	12	TL	-		km/h - bar	3.50
												90	2000
												40	2300
12.5 - 20	11.0	12 SDC	325	1040	475	3090	STD	16	TL	-		km/h - bar	4.50
												90	2300
												40	2750
14.5 - 20	11	12 SDC	360	1116	495	3315	STD	10	TL	-		km/h - bar	2.50
												90	2000
												40	2300
14.5 - 20	11	12 SDC	360	1116	495	3315	STD	12	TL	-		km/h - bar	3.00
												90	2240
												40	2580
14.5 - 20	11	12 SDC	360	1116	495	3315	STD	14	TL	-		km/h - bar	3.50
												90	2430
												40	2790
14.5 - 20	11	12 SDC	360	1116	495	3315	HD	14	TL	-		km/h - bar	3.50
												90	2430
												40	2790
14.5 - 20	11	12 SDC	360	1116	495	3315	STD	16	TL	-		km/h - bar	4.00
												90	2575
												40	2960
14.5 - 20	11	12 SDC	360	1116	495	3315	STD	18	TL	-		km/h - bar	4.50
												90	2725
												40	3135

Performance

Durability

Traction

Self-Cleaning

Comfort

STD: Standard - HD: Heavy Duty

MP 567

∅ 20"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	3.50
	16.0/70 - 20	13 SDC	12	405	1128	490	3350	STD	14	TL	-		**90**	2900
													40	3340

	16.0/70 - 20	13 SDC	12	405	1128	490	3350	STD	14	TT	-		**km/h - bar**	**3.50**
													90	2900
													40	3340

STD: Standard

Performance

- *Durability*
- *Traction*
- *Self-Cleaning*
- *Comfort*



Bias



MP 570

MP 570 is a road-oriented and agro-industrial tire, which is suitable for excavators and compact loaders. This tire provides good traction as well as excellent self-cleaning properties in all operating conditions.

∅ 18"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	3.00
	12.5 - 18	11	12 SDC	308	990	450	2950	STD	10	TL	-		80	1930
													50	2000
	12.5 - 18	11	12 SDC	308	990	450	2950	STD	12	TL	-		km/h - bar	3.50
													80	2030
													50	2180
∅ 20"	12.5 - 20	11	12 SDC	335	1050	480	3130	STD	10	TL	-		km/h - bar	3.00
													80	1850
													50	2065
	12.5 - 20	11	12 SDC	325	1040	480	3130	STD	12	TL	-		km/h - bar	3.50
													80	2060
													50	2300
	14.5 - 20	11	12 SDC	360	1116	505	3325	STD	12	TL	-		km/h - bar	3.00
													65	2430
													50	2500

STD: Standard

Performance


Durability

Traction

Self-Cleaning

MULTIUSE

Bias



MP 585

MP 585 is a road-oriented and agro-industrial tire, which is suitable for multi-purpose vehicles in municipality/maintenance applications. This tire is specially engineered with a tread pattern that offers maximum stability in the most difficult working conditions.

∅ 20"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	5.50
	6.50 - 20	5.50 F	4.00 E ; 5.00 F	200	875	-	-	STD	10	TT	106 A6		30	950
	10.5 - 20	9	9 SDC	273	970	455	2890	STD	10	TL	-		km/h - bar	3.75
													90	1800
													50	2000
	12.5 - 20	11	12 SDC	335	1050	480	3130	STD	12	TL	-		km/h - bar	3.50
													90	2000
													50	2240

STD: Standard

Technologies

Block Pattern

High Speed

Performance

Stability

Durability

MULTIUSE

Bias



MP 590

MP 590 is an agro-industrial tire suitable for loading operations with compact loaders, telehandlers and forklifts. This tire provides good traction and excellent stability as well as high load capacity to enhance productivity.

∅ 22.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	5.50
	18 - 22.5	14.0	-	480	1190	530	3534	STD	16	TL	-		40 DW	4875
													30 DW	5450
	18 - 22.5	14.0	-	480	1190	530	3534	STD	20	TL	-		km/h - bar	7.50
													40 DW	5800
													30 DW	6500

STD: Standard

Performance

Stability

Traction

Durability

MULTIUSE

Bias



MP 600

MP 600 is a road-oriented and agro-industrial tire, suitable for loading operations with compact loaders and telehandlers. This tire provides good traction and excellent stability along with an extended product life-cycle.

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel		Load capacity (kg/tire)	
∅ 18"													km/h - bar	3.75
	10.5 - 18	9	9 SDC	272	920	420	2740	STD	10	TL	-		40 DW	1950
													50 DW	1900
	12.5 - 18	11	12 SDC	308	990	450	2950	STD	10	TL	-		km/h - bar	3.00
													40 DW	2060
													50 DW	2000
	12.5 - 18	11	12 SDC	308	990	450	2950	STD	12	TL	-		km/h - bar	3.50
													40 DW	2300
													50 DW	2240
∅ 20"	400/70 - 20	13 SDC	12	405	1085	-	-	STD	14	TL	-		km/h - bar	4.00
													40 DW	3550
													50 DW	3250
∅ 24"	400/70 - 24	13 SDC	12	405	1185	545	3530	STD	10	TL	-		km/h - bar	2.50
													40 DW	2975
													50 DW	2900
	400/70 - 24	13 SDC	12	405	1185	545	3530	STD	14	TL	-		km/h - bar	3.50
													40 DW	3650
													50 DW	3550
	400/70 - 24	13 SDC	12	405	1185	545	3530	SPL	14	TL	-		km/h - bar	3.50
													40 DW	3650
													50 DW	3550
	400/70 - 24	13 SDC	12	405	1185	545	3530	STD	18	TL	158 A8		km/h - bar	4.50
													40 DW	4250
													50 DW	4125

Performance

Durability

Traction

Self-Cleaning

Comfort

STD: Standard - SPL: Special

MULTIUSE

Bias



PL 801

PL 801 has been specially designed for hay harvesting applications with rotor rakes/ tedders and for logistics operations with forklifts. It features excellent stability as well as high cut and chip resistance. PL 801 ensures an extended tire life-cycle.

∅ 5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	5.30
	23 X 5	3.75 P	-	154	640	STD	6	TT		25 LOAD WHEEL	1495
										25 STEER WHEEL	1150
										10 OTHER VEHICLES	1495
										25 OTHER VEHICLES	1150
										STATIC SIDE LOADER	1735
∅ 8"	5.00 - 8	3.00 D	3.25 I	135	468	STD	8	TT		km/h - bar	8.30
										25 LOAD WHEEL	1235
										25 STEER WHEEL	950
										10 OTHER VEHICLES	1235
										25 OTHER VEHICLES	950
										STATIC SIDE LOADER	1435
	5.00 - 8	3.00 D	3.25 I	135	468	STD	10	TT		km/h - bar	10.00
										25 LOAD WHEEL	1415
										25 STEER WHEEL	1090
										10 OTHER VEHICLES	1415
										25 OTHER VEHICLES	1090
										STATIC SIDE LOADER	1645
	18 X 7 - 8	4.33 R	5.00 F	173	470	STD	14	TT		km/h - bar	9.00
										25 LOAD WHEEL	1885
										25 STEER WHEEL	1450
										10 OTHER VEHICLES	1885
										25 OTHER VEHICLES	1450
										STATIC SIDE LOADER	2190
	18 X 7 - 8	4.33 R	5.00 F	173	470	STD	16	TT		km/h - bar	10.00
										25 LOAD WHEEL	2145
										25 STEER WHEEL	1650
										10 OTHER VEHICLES	2145
										25 OTHER VEHICLES	1650
										STATIC SIDE LOADER	2490
∅ 9"	6.00 - 9	4.00 E	-	157	543	STD	10	TT		km/h - bar	8.50
										25 LOAD WHEEL	1715
										25 STEER WHEEL	1320
										10 OTHER VEHICLES	1715
										25 OTHER VEHICLES	1320
										STATIC SIDE LOADER	1995

STD: Standard

Performance

Durability

Cut and Chip Resistance

Stability

PL 801

∅ 9”	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	8.50
	6.00 - 9	4.00 E	-	157	543	SPL	10	TT		25 LOAD WHEEL	1715
										25 STEER WHEEL	1320
										10 OTHER VEHICLES	1715
										25 OTHER VEHICLES	1320
										STATIC SIDE LOADER	1995
	6.00 - 9	4.00 E	-	157	543	STD	12	TT		km/h - bar	10.00
										25 LOAD WHEEL	1885
										25 STEER WHEEL	1450
										10 OTHER VEHICLES	1885
										25 OTHER VEHICLES	1450
										STATIC SIDE LOADER	2190
	21 X 8 - 9	6.00 E	7.00 E	200	535	STD	14	TT		km/h - bar	9.00
										25 LOAD WHEEL	2535
										25 STEER WHEEL	1950
										10 OTHER VEHICLES	2535
										25 OTHER VEHICLES	1950
										STATIC SIDE LOADER	2945
	21 X 8 - 9	6.00 E	7.00 E	200	535	STD	16	TT		km/h - bar	10.00
										25 LOAD WHEEL	2755
										25 STEER WHEEL	2120
										10 OTHER VEHICLES	2755
										25 OTHER VEHICLES	2120
										STATIC SIDE LOADER	3200
∅ 10”	6.50 - 10	5.00 F	5.50 F	185	595	STD	10	TT		km/h - bar	7.80
										25 LOAD WHEEL	1950
										25 STEER WHEEL	1500
										10 OTHER VEHICLES	1950
										25 OTHER VEHICLES	1500
										STATIC SIDE LOADER	2265
∅ 12”	7.00 - 12	5.00 S	-	189	692	STD	12	TT		km/h - bar	8.50
										25 LOAD WHEEL	2680
										25 STEER WHEEL	2060
										10 OTHER VEHICLES	2680
										25 OTHER VEHICLES	2060
										STATIC SIDE LOADER	3110
	7.00 - 12	5.00 S	-	189	692	STD	14	TT		km/h - bar	9.00
										25 LOAD WHEEL	2755
										25 STEER WHEEL	2120
										10 OTHER VEHICLES	2755
										25 OTHER VEHICLES	2120
										STATIC SIDE LOADER	3200

Performance

Durability

Cut and Chip Resistance

Stability

STD: Standard - SPL: Special

PL 801

∅ 15"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	7.30
	5.50 - 15	5.50	4.50 E DT ; 4.50 E SDC	157	670	STD	8	TT		25 LOAD WHEEL	1950
										25 STEER WHEEL	1445
										10 OTHER VEHICLES	1950
										25 OTHER VEHICLES	1445
										STATIC SIDE LOADER	2180

									km/h - bar	8.30
7.00 - 15	5.5	4.33 R ; 5.0	200	750	STD	12	TT		25 LOAD WHEEL	3070
									25 STEER WHEEL	2360
									10 OTHER VEHICLES	3070
									25 OTHER VEHICLES	2360
									STATIC SIDE LOADER	3565

									km/h - bar	8.60	9.00
7.00 - 15	6.0	5.50 BD ; 5.5	206	775	STD	12	TT		25 LOAD WHEEL	2835	-
									25 STEER WHEEL	2395	-
									10 OTHER VEHICLES	2395	-
									25 OTHER VEHICLES	1760	-
									STATIC SIDE LOADER	-	3865

									km/h - bar	10.00	10.30
7.00 - 15	6.0	5.50 BD ; 5.5	206	775	STD	14	TT		25 LOAD WHEEL	3095	-
									25 STEER WHEEL	2615	-
									10 OTHER VEHICLES	2615	-
									25 OTHER VEHICLES	1920	-
									STATIC SIDE LOADER	-	4225

									km/h - bar	8.00
7.50 - 15	6.0	6.00 S ; 6.5	220	785	STD	12	TT		25 LOAD WHEEL	3445
									25 STEER WHEEL	2650
									10 OTHER VEHICLES	3445
									25 OTHER VEHICLES	2650
									STATIC SIDE LOADER	4000

									km/h - bar	9.20	9.70
7.50 - 15	6.0	6.00 S ; 6.5	220	814	STD	14	TT		25 LOAD WHEEL	3430	-
									25 STEER WHEEL	2900	-
									10 OTHER VEHICLES	2900	-
									25 OTHER VEHICLES	2130	-
									STATIC SIDE LOADER	-	4685

									km/h - bar	9.30
7.50 - 15	6.0	6.00 S ; 6.5	220	785	STD	14	TT		25 LOAD WHEEL	3640
									25 STEER WHEEL	2800
									10 OTHER VEHICLES	3640
									25 OTHER VEHICLES	2800
									STATIC SIDE LOADER	4230

STD: Standard

Performance

Durability

Cut and Chip Resistance

Stability

PL 801

∅ 15"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	8.30
	8.15 - 15	7.0	7.00 BD	215	720	STD	12	TT		25 LOAD WHEEL	3445
										25 STEER WHEEL	2650
										10 OTHER VEHICLES	3445
										25 OTHER VEHICLES	2650
										STATIC SIDE LOADER	4000
	8.15 - 15	7.0	7.00 BD	215	720	STD	14	TT		km/h - bar	10.00
										25 LOAD WHEEL	3900
										25 STEER WHEEL	3000
										10 OTHER VEHICLES	3900
										25 OTHER VEHICLES	3000
										STATIC SIDE LOADER	4530
	8.25 - 15	6.5	6.0 ; 7.0	236	854	STD	12	TT		km/h - bar	7.00
										25 LOAD WHEEL	3900
										25 STEER WHEEL	3000
										10 OTHER VEHICLES	3900
										25 OTHER VEHICLES	3000
										STATIC SIDE LOADER	4530
	8.25 - 15	6.5	6.0 ; 7.0	236	854	STD	14	TT		km/h - bar	8.00
										25 LOAD WHEEL	4225
										25 STEER WHEEL	3250
										10 OTHER VEHICLES	4225
										25 OTHER VEHICLES	3250
										STATIC SIDE LOADER	4910
	250 - 15	7.50 BD	7.0 ; 7.5	235	745	STD	16	TT		km/h - bar	8.30
										25 LOAD WHEEL	4355
										25 STEER WHEEL	3350
										10 OTHER VEHICLES	4355
										25 OTHER VEHICLES	3350
										STATIC SIDE LOADER	5060
	250 - 15	7.50 BD	7.0 ; 7.5	235	745	STD	20	TT		km/h - bar	10.00
										25 LOAD WHEEL	5040
										25 STEER WHEEL	3875
										10 OTHER VEHICLES	5040
										25 OTHER VEHICLES	3875
										STATIC SIDE LOADER	5850
	300 - 15	8.00 BD	8.0	295	840	STD	18	TT		km/h - bar	7.50
										25 LOAD WHEEL	5850
										25 STEER WHEEL	4500
										10 OTHER VEHICLES	5850
										25 OTHER VEHICLES	4500
										STATIC SIDE LOADER	6795

Performance

Durability

Cut and Chip Resistance

Stability

STD: Standard

FRONT



FRONT

Bias



TF 8181

TF 8181 is a field and road tire designed for 2WD tractors in soil tillage and haulage applications. This tire provides excellent steering performance.

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 3.40
∅ 15"	**4.00 - 15**	3.00 D	4 J	112	605	287	1834	STD	4	TT	66 A6		30	300
	5.00 - 15	4.00 E	3.00 D ; 4 J ; 4½ J	142	655	307	1951	STD	4	TT	73 A6		km/h - bar	2.80
													30	365
	5.00 - 15	4.00 E	3.00 D ; 4 J ; 4½ J	142	655	307	1951	STD	6	TT	82 A6		km/h - bar	3.70
													30	475
	5.00 - 15	4.00 E	3.00 D ; 4 J ; 4½ J	142	655	307	1951	SPL	6	TT	82 A6		km/h - bar	3.70
													30	475
∅ 16"	**4.00 - 16**	3.00 D	-	112	630	301	1877	STD	4	TT	69 A6		km/h - bar	3.40
													30	325
	4.50 - 16	3.00 D	-	122	655	311	1952	STD	4	TT	73 A6		km/h - bar	3.10
													30	365
	5.00 - 16	4.00 E	3.00 D ; 4 J ; 4½ J	140	680	322	2025	STD	4	TT	76 A6		km/h - bar	2.80
													30	400
	5.00 - 16	4.00 E	3.00 D ; 4 J ; 4½ J	140	680	322	2025	STD	6	TT	84 A6		km/h - bar	4.20
													30	500
	5.00 - 16	4.00 E	3.00 D ; 4 J ; 4½ J	140	680	322	2025	SPL	6	TT	84 A6		km/h - bar	4.20
													30	500

Performance

Steering Control

STD: Standard - SPL: Special

TF 8181

Performance

Steering Control

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire)	
													km/h - bar	3.70
	5.50 - 16	4.00 E	3.50 D ; 4.50 E	158	720	340	2145	STD	6	TT	86 A6		**30**	530
	5.50 - 16	4.00 E	3.50 D ; 4.50 E	158	720	340	2145	SPL	6	TT	86 A6		**km/h - bar**	**3.70**
													30	530
	6.00 - 16	4.50 E	4.00 E ; 5 K ; 5.00 F	170	745	350	2220	STD	6	TT	88 A6		**km/h - bar**	**3.30**
													30	560
	6.00 - 16	4.50 E	4.00 E ; 5 K ; 5.00 F	170	745	350	2220	SPL	6	TT	88 A6		**km/h - bar**	**3.30**
													30	560
	6.00 - 16	4.50 E	4.00 E ; 5 K ; 5.00 F	170	745	350	2220	STD	8	TT	94 A6		**km/h - bar**	**4.50**
													30	670
	6.00 - 16	4.50 E	4.00 E ; 5 K ; 5.00 F	170	745	350	2220	SPL	8	TT	94 A6		**km/h - bar**	**4.50**
													30	670
	6.50 - 16	4.50 E	4.00 E ; 5 K ; 5.00 F ; 5.50 F	180	770	361	2295	STD	6	TT	91 A6		**km/h - bar**	**3.10**
													30	615
	6.50 - 16	4.50 E	4.00 E ; 5 K ; 5.00 F ; 5.50 F	180	770	361	2295	IND	6	TT	91 A6		**km/h - bar**	**3.10**
													30	615
	6.50 - 16	4.50 E	4.00 E ; 5 K ; 5.00 F ; 5.50 F	180	770	361	2295	SPL	6	TT	91 A6		**km/h - bar**	**3.10**
													30	615
	6.50 - 16	4.50 E	4.00 E ; 5 K ; 5.00 F ; 5.50 F	180	770	361	2295	HD	8	TT	98 A6		**km/h - bar**	**4.20**
													30	750
	6.50 - 16	4.50 E	4.00 E ; 5 K ; 5.00 F ; 5.50 F	180	770	361	2295	SPL	10	TT	102 A6		**km/h - bar**	**5.30**
													30	850

IND: Industrial - STD: Standard - SPL: Special - HD: Heavy Duty

TF 8181

Performance

Steering Control

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire)	
													km/h - bar	2.80
	7.50 - 16	5.50 F	5.00 F ; 5 K ; 6.00 F	205	820	383	2445	STD	6	TT	98 A6		30	750
	7.50 - 16	5.50 F	5.00 F ; 5 K ; 6.00 F	205	820	383	2445	SPL	6	TT	98 A6		km/h - bar	2.80
													30	750
	7.50 - 16	5.50 F	5.00 F ; 5 K ; 6.00 F	205	820	383	2445	STD	8	TT	103 A6		km/h - bar	3.70
													30	875
	7.50 - 16	5.50 F	5.00 F ; 5 K ; 6.00 F	205	820	383	2445	SPL	8	TT	103 A6		km/h - bar	3.70
													30	875
	7.50 - 16	5.50 F	5.00 F ; 5 K ; 6.00 F	205	820	383	2445	STD	10	TT	109 A6		km/h - bar	4.80
													30	1030
	7.50 - 16	5.50 F	5.00 F ; 5 K ; 6.00 F	205	820	383	2445	IMP	14	TT	122 A6		km/h - bar	5.50
													30	1500
	10.00 - 16	W 8	W 8 L	273	895	411	2667	STD	8	TT	115 A6		km/h - bar	2.80
													30	1215
	11.00 - 16	W 10 L	W 8 ; W 8 L	326	980	447	2920	STD	8	TT	118 A6		km/h - bar	2.50
													30	1320
∅ 18"	**6.00 - 18**	4.50 E	4.00 E ; 5.00 F	172	800	374	2410	STD	8	TT	101 A6		km/h - bar	4.20
													30	825
	7.50 - 18	5.50 F	-	208	875	410	2605	STD	6	TT	101 A6		km/h - bar	2.80
													30	825
	7.50 - 18	5.50 F	-	208	875	410	2605	SPL	6	TT	101 A6		km/h - bar	2.80
													30	825

STD: Standard - SPL: Special - IMP: Implement

TF 8181

Performance

Steering Control

∅ 18"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	3.70
	7.50 - 18	5.50 F	-	208	875	410	2605	STD	8	TT	106 A6		**30**	950
	7.50 - 18	5.50 F	-	208	875	410	2605	HD	8	TT	106 A6		**km/h - bar**	**3.70**
													30	950
	7.50 - 18	5.50 F	-	208	875	410	2605	SPL	8	TT	106 A6		**km/h - bar**	**3.70**
													30	950
∅ 19"	**6.00 - 19**	4.50 E	4.00 E ; 5.50 F	165	814	385	2425	STD	6	TT	93 A6		**km/h - bar**	**3.30**
													30	650
∅ 20"	**6.50 - 20**	5.00 F	4.00 E ; 5.50 F	180	865	409	2578	STD	6	TT	97 A6		**km/h - bar**	**3.10**
													30	730
	6.50 - 20	5.00 F	4.00 E ; 5.50 F	180	865	409	2578	STD	8	TT	101 A6		**km/h - bar**	**3.90**
													30	825
	6.50 - 20	5.00 F	4.00 E ; 5.50 F	180	865	409	2578	SPL	8	TT	101 A6		**km/h - bar**	**3.90**
													30	825
	7.50 - 20	5.50 F	5.00 F	205	915	431	2725	STD	6	TT	103 A6		**km/h - bar**	**2.80**
													30	875
	7.50 - 20	5.50 F	5.00 F	205	915	431	2725	HD	6	TT	103 A6		**km/h - bar**	**2.80**
													30	875
	7.50 - 20	5.50 F	5.00 F	205	915	431	2725	STD	8	TT	109 A6		**km/h - bar**	**3.40**
													30	1030
	7.50 - 20	5.50 F	5.00 F	205	915	431	2725	HD	8	TT	109 A6		**km/h - bar**	**3.40**
													30	1030
	7.50 - 20	5.50 F	5.00 F	205	915	431	2725	SPL	8	TT	109 A6		**km/h - bar**	**3.40**
													30	1030

STD: Standard - SPL: Special - HD: Heavy Duty

FRONT

Bias



TF 9090

TF 9090 is a tire designed for small tractors in soil tillage operations. The special tread design provides excellent steering performance on loose soil.

Performance

Steering Control

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	3.40
∅ 12"	**4.00 - 12**	3.00 D	2.50 C	112	530	255	1573	STD	4	TT	60 A6		**30**	250
	4.00 - 12	3.00 D	2.50 C	112	530	255	1573	STD	6	TT	68 A6		km/h - bar	**5.10**
													30	315
∅ 15"	**5.00 - 15**	4.00 E	3.00 D ; 4 J ; 4½ J	140	655	307	1951	STD	4	TT	73 A6		km/h - bar	**2.80**
													30	365
	5.00 - 15	4.00 E	3.00 D ; 4 J ; 4½ J	140	655	307	1951	STD	6	TT	82 A6		km/h - bar	**3.70**
													30	475
∅ 16"	**4.00 - 16**	3.00 D	-	112	630	301	1877	STD	4	TT	69 A6		km/h - bar	**3.40**
													30	325
	5.50 - 16	4.00 E	3.50 D ; 4.50 E	150	720	332	2116	STD	6	TT	86 A6		km/h - bar	**3.70**
													30	530
	6.00 - 16	4.50 E	4.00 E ; 5 K ; 5.00 F	170	735	346	2190	STD	6	TT	88 A6		km/h - bar	**3.30**
													30	560
	6.00 - 16	4.50 E	4.00 E ; 5 K ; 5.00 F	170	735	346	2190	SPL	6	TT	88 A6		km/h - bar	**3.30**
													30	560
	6.00 - 16	4.50 E	4.00 E ; 5 K ; 5.00 F	170	735	346	2190	STD	8	TT	94 A6		km/h - bar	**4.50**
													30	670
	6.00 - 16	4.50 E	4.00 E ; 5 K ; 5.00 F	170	735	346	2190	SPL	8	TT	94 A6		km/h - bar	**4.50**
													30	670

STD: Standard - SPL: Special

TF 9090

Performance

Steering Control

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire)	
													km/h - bar	3.10
	6.50 - 16	4.50 E	4.00 E ; 5 K ; 5.00 F ; 5.50 F	180	765	359	2280	STD	6	TT	91 A6		30	615
	6.50 - 16	4.50 E	4.00 E ; 5 K ; 5.00 F ; 5.50 F	180	765	359	2280	STD	8	TT	98 A6		km/h - bar	4.20
													30	750
	7.50 - 16	5.50 F	5.00 F ; 5 K ; 6.00 F	207	810	379	2414	STD	6	TT	98 A6		km/h - bar	2.80
													30	750
	7.50 - 16	5.50 F	5.00 F ; 5 K ; 6.00 F	207	810	379	2414	SPL	6	TT	98 A6		km/h - bar	2.80
													30	750
	7.50 - 16	5.50 F	5.00 F ; 5 K ; 6.00 F	207	810	379	2414	STD	8	TT	103 A6		km/h - bar	3.70
													30	875
	7.50 - 16	5.50 F	5.00 F ; 5 K ; 6.00 F	207	810	379	2414	SPL	8	TT	103 A6		km/h - bar	3.70
													30	875
	7.50 - 16	5.50 F	5.00 F ; 5 K ; 6.00 F	207	810	379	2414	STD	10	TT	109 A6		km/h - bar	4.80
													30	1030
	9.00 - 16	W 8	6.00 F ; W 7 ; W 8 L	257	855	398	2548	STD	8	TT	111 A6		km/h - bar	3.10
													30	1090
	9.00 - 16	W 8	6.00 F ; W 7 ; W 8 L	257	855	398	2548	STD	10	TT	116 A6		km/h - bar	3.90
													30	1250
	9.00 - 16	W 8	6.00 F ; W 7 ; W 8 L	257	855	398	2548	SPL	10	TT	116 A6		km/h - bar	3.90
													30	1250
	10.00 - 16	W 8	W 8 L	275	900	418	2682	STD	8	TT	115 A6		km/h - bar	2.80
													30	1215
	10.00 - 16	W 8	W 8 L	275	900	418	2682	SPL	8	TT	115 A6		km/h - bar	2.80
													30	1215

STD: Standard - SPL: Special

TF 9090

Performance

Steering Control

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire)	
													km/h - bar	3.40
	10.00 - 16	W 8	W 8 L	275	900	418	2682	STD	10	TT	119 A6		30	1360
	10.00 - 16	W 8	W 8 L	275	900	418	2682	SPL	10	TT	119 A6		km/h - bar	3.40
													30	1360
	11.00 - 16	W 10 L	W 8 ; W 8 L	320	970	448	2890	STD	8	TT	118 A6		km/h - bar	2.50
													30	1320
	11.00 - 16	W 10 L	W 8 ; W 8 L	320	970	448	2890	STD	8	TL	118 A6		km/h - bar	2.50
													30	1320
	11.00 - 16	W 10 L	W 8 ; W 8 L	320	970	448	2890	SPL	8	TT	118 A6		km/h - bar	2.50
													30	1320
∅ 18"	7.50 - 18	5.50 F	-	207	860	404	2562	STD	6	TT	101 A6		km/h - bar	2.80
													30	825
	7.50 - 18	5.50 F	-	207	860	404	2562	SPL	6	TT	101 A6		km/h - bar	2.80
													30	825
	7.50 - 18	5.50 F	-	207	860	404	2562	STD	8	TT	106 A6		km/h - bar	3.70
													30	950
	7.50 - 18	5.50 F	-	207	860	404	2562	SPL	8	TT	106 A6		km/h - bar	3.70
													30	950
	7.50 - 18	5.50 F	-	207	860	404	2562	STD	10	TT	113 A6		km/h - bar	4.75
													30	1150
∅ 19"	4.00 - 19	3.00 D	-	115	715	343	2145	STD	4	TT	72 A6		km/h - bar	3.40
													30	355
	6.00 - 19	4.50 E	4.00 E ; 5.00 F	167	815	386	2445	STD	6	TT	93 A6		km/h - bar	3.30
													30	650

STD: Standard - SPL: Special

FRONT

TF 9090

∅ 20"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 2.80
	7.50 - 20	5.50 F	5.00 F	205	915	431	2725	STD	6	TT	103 A6		**30**	875
	7.50 - 20	5.50 F	5.00 F	205	915	431	2725	SPL	6	TT	103 A6		**km/h - bar**	**2.80**
													30	875
	7.50 - 20	5.50 F	5.00 F	205	915	431	2725	STD	8	TT	109 A6		**km/h - bar**	**3.40**
													30	1030
	7.50 - 20	5.50 F	5.00 F	205	915	431	2725	IND	8	TT	109 A6		**km/h - bar**	**3.40**
													30	1030
	7.50 - 20	5.50 F	5.00 F	205	915	431	2725	SPL	8	TT	109 A6		**km/h - bar**	**3.40**
													30	1030

Performance

Steering Control

STD: Standard - SPL: Special - IND: Industrial

FRONT

Bias



TF 9393

TF 9393 is an agricultural front tire specifically designed for small tractors in soils tillage applications and it is particularly suitable on loose soils. Its tread shows a wide center part and shoulder ribs. The special tread design provides excellent steering performance on all surfaces.

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 3.70
	7.50 - 16	5.50 F	5.00 F ; 6.00 F	210	810	-	-	STD	8	TT	103 A6		**30**	875

Performance

Steering Control

STD: Standard

FRONT

Bias



COMMANDER (F)

COMMANDER (F) is a front 3-rib pattern tire - perfect for soil tillage and haulage applications. Its deep tread made of a cut-and-chip resistant compound ensures a longer tire life, together with high load capacity.

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 3.70
	5.50 - 16	4.00 E	3.50D ; 4.50E	155	720	340	2145	STD	6	TT	86 A6		**30**	530
	6.00 - 16	4.50 E	4.00 E ; 5.00 F	170	745	349	2234	STD	8	TT	94 A6		**km/h - bar**	**4.50**
													30	670
	6.50 - 16	4.50 E	4.00 E ; 5.00 F ; 5.50 F	183	770	362	2332	STD	8	TT	98 A6		**km/h - bar**	**4.20**
													30	750
	6.50 - 16	4.50 E	4.00 E ; 5.00 F ; 5.50 F	183	770	362	2332	STD	10	TT	102 A6		**km/h - bar**	**5.00**
													30	850
	7.50 - 16	5.50 F	5.00 F ; 5 K ; 6.00 F	210	810	376	2433	STD	8	TT	103 A6		**km/h - bar**	**3.70**
													30	875

STD: Standard

Technologies

Deep Tread

Performance

Durability

High Load Capacity

Cut and Chip Resistance



Bias

FRONT



COMMANDER TWIN RIB

COMMANDER TWIN RIB is a 4-rib pattern tire with shoulder notches providing excellent grip. Its wider tread profile ensures good weight distribution. The strong casing along with a superior tread compound provide a longer tire life. COMMANDER TWIN RIB is perfect for soil tillage and haulage applications.

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	3.70
∅ 15"	5.00 - 15	4.00 E	-	145	665	-	-	STD	6	TT	82 A6		30	475
∅ 16"	6.00 - 16	4.50 E	4.00 E ; 5.00 F	170	750	-	-	STD	8	TT	94 A6		km/h - bar	4.50
													30	670
	6.50 - 16	4.50 E	4.00 E ; 5.00 F ; 5.50 F	180	761	-	-	STD	8	TT	98 A6		km/h - bar	4.20
													30	750
	7.50 - 16	5.50 F	5.00 F ; 5 K ; 6.00 F	210	810	-	-	STD	8	TT	103 A6		km/h - bar	3.70
													30	875
∅ 20"	6.50 - 20	5.00 F	4.00 E ; 5.50 F	190	875	-	-	STD	8	TT	101 A6		km/h - bar	4.50
													30	825

STD: Standard

Technologies


Deep Tread

Performance

Durability

High Load Capacity

Cut and Chip Resistance

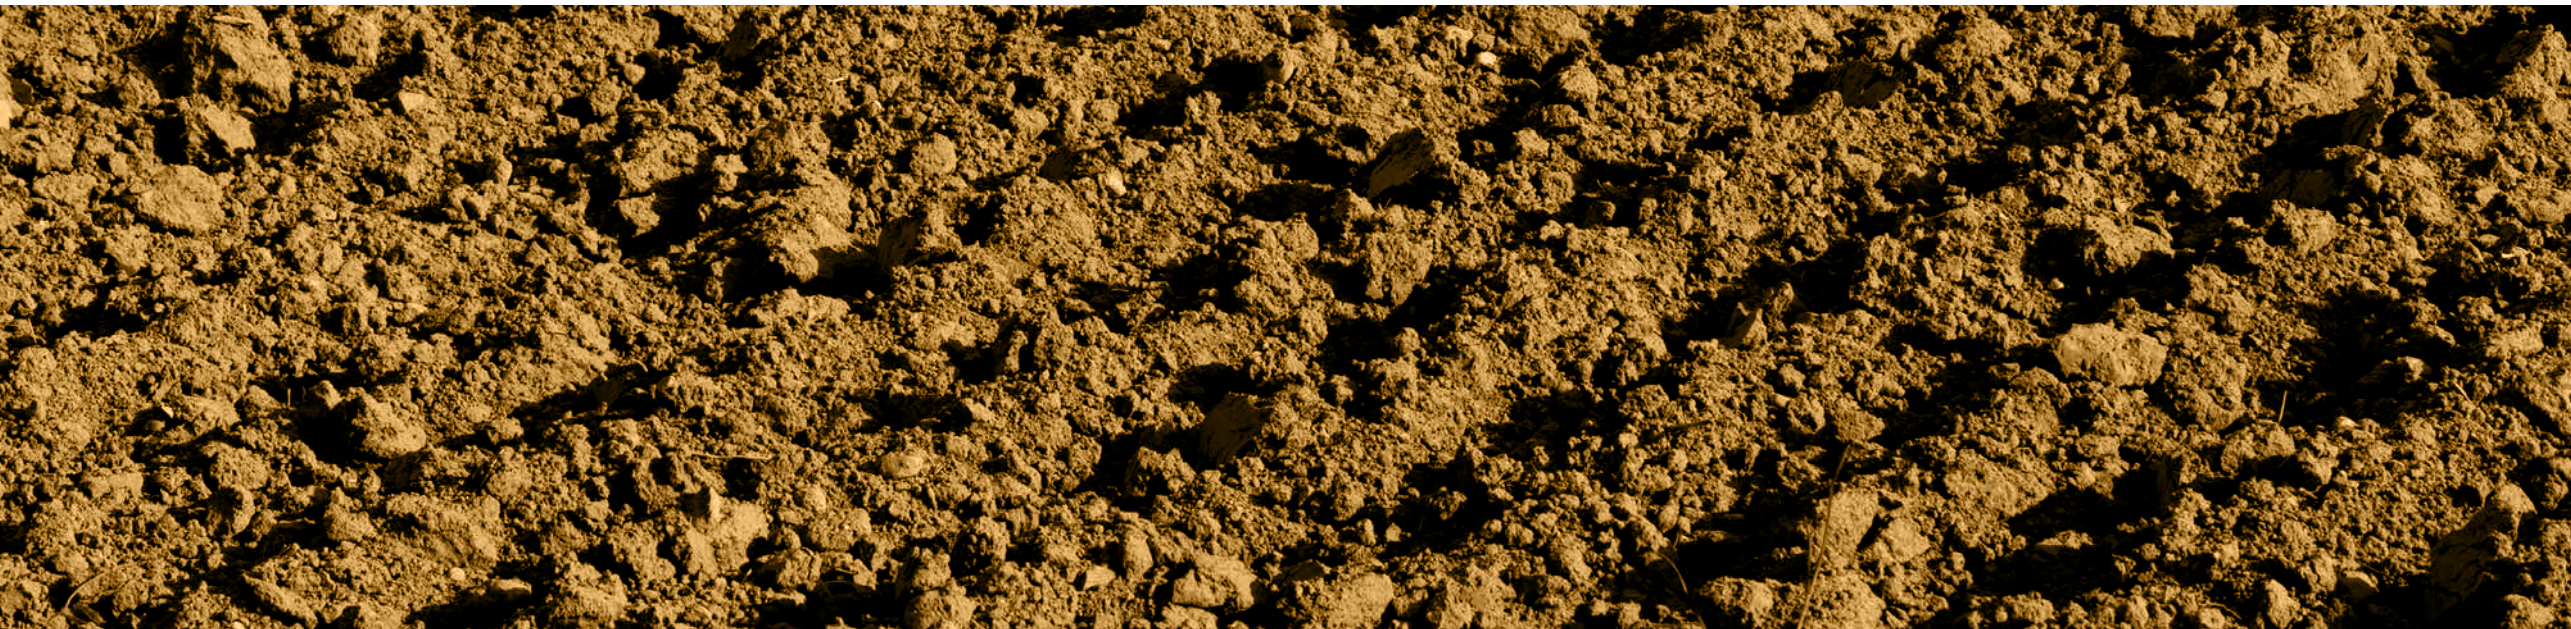

Bias

FRONT



COMMANDER 3 RIB

COMMANDER 3 RIB is a 3-rib pattern front tire designed for soil tillage and haulage operations. It provides excellent durability and load capacity thanks to the optimized weight distribution on center and shoulder ribs. The strong casing along with the cut-and-chip resistant compound ensure outstanding puncture resistance.

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 4.50
	6.00 - 16	4.50 E	4.00 E ; 5.00 F	175	740	-	-	STD	8	TT	94 A6		30	670

STD: Standard

Technologies

Deep Tread

Performance

Durability

High Load Capacity

Cut and Chip Resistance

Bias

FRONT



POWER RIB F2

POWER RIB F2 has been specially designed for 2WD tractors in soil tillage applications. This field-oriented tire is particularly suitable for all operations where excellent steering performance is required.

∅ 15"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 3.00
	11L - 15 SL	8 LB	10 LB	279	813	374	2423	STD	8	TL	110 A6		30	1060

STD: Standard

Performance

Steering Control

FRONT

Bias



PRO RIB F2M

PRO RIB F2M is an agricultural tire for 2WD tractors in soil tillage applications. It is particularly suitable for all operations requiring a high level of handling.

Performance

Steering Control

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	3.30
∅ 15"	9.5L - 15 SL	7.00	8 LB	240	780	364	2325	STD	8	TL	102 A8		40	850
	11L - 15 SL	8 LB	10 LB	280	795	370	2370	STD	8	TL	106 A8		km/h - bar	3.00
													40	950
∅ 16"	10.00 - 16 SL	8 LB	W 8 L	280	880	409	2620	STD	8	TT	110 A8		km/h - bar	3.00
													40	1060
	10.00 - 16 SL	8 LB	W 8 L	280	880	409	2620	STD	8	TL	110 A8		km/h - bar	3.00
													40	1060
	10.00 - 16 SL	8 LB	W 8 L	280	880	409	2620	IND	8	TT	110 A8		km/h - bar	3.00
													40	1060
	11.00 - 16 SL	10 LB	W 8 L ; 8 LB	335	950	440	2830	STD	8	TT	114 A8		km/h - bar	2.80
													40	1180
	11.00 - 16 SL	10 LB	W 8 L ; 8 LB	335	950	440	2830	STD	8	TL	114 A8		km/h - bar	2.80
													40	1180
	11.00 - 16 SL	10 LB	W 8 L ; 8 LB	335	950	440	2830	IND	8	TT	114 A8		km/h - bar	2.80
													40	1180
∅ 16.1"	14L - 16.1 SL	W 11 C	-	355	980	453	2920	STD	12	TL	127 A8		km/h - bar	3.60
													40	1750

STD: Standard - IND: Industrial

FRONT

Bias



RIB F3

RIB F3 is a field-oriented tire designed for 2WD tractors in soil tillage and haulage operations. Some sizes are suitable for transport applications using trailers. The RIB F3 tire is the ideal partner for all operations that require a high level of handling. It has been designed with a hard compound to ensure great durability and stubble resistance.

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	470
	9.00 - 16	W 8	6.00 F ; W 7 ; W 8 L	245	878	387	2573	STD	12	TT	120 A6/ 112 A8		30	1400
													40	1120
	9.00 - 16	W 8	6.00 F ; W 7 ; W 8 L	245	878	387	2573	STD	12	TL	120 A6/ 112 A8		km/h - bar	470
													30	1400
													40	1120
	9.00 - 16	W 8	6.00 F ; W 7 ; W 8 L	245	878	387	2573	HD	12	TT	120 A6/ 112 A8		km/h - bar	470
													30	1400
													40	1120

STD: Standard - HD: Heavy Duty

Technologies



Hard Compound

Performance



Steering Control



Stubble Resistance



Durability



FRONT

Bias



STEER FARM

STEER FARM has been designed for 2WD tractors in soil tillage applications, providing excellent steering performance.

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 4.50
∅ 14"	**5.20 - 14**	3.50 D	4.00 E	135	625	296	1837	STD	6	TT	75 A6		**30**	387
∅ 16"	**6.00 - 16**	4.50 E	4.00 E ; 5 K ; 5.00 F	170	740	345	2205	STD	8	TT	94 A6		**km/h - bar**	**4.50**
													30	670
	6.50 - 16	4.50 E	4.00 E ; 5.00 F ; 5.50 F	185	770	-	-	STD	8	TT	98 A6		**km/h - bar**	**4.20**
													30	750
	7.50 - 16	5.50 F	5.00 F ; 5 K ; 6.00 F	205	805	373	2391	STD	8	TT	103 A6		**km/h - bar**	**3.70**
													30	875
∅ 20"	**6.50 - 20**	5.50 F	4.00 E ; 5.00 F	196	878	-	-	STD	8	TT	101 A6		**km/h - bar**	**4.50**
													30	825

Performance

Steering Control

STD: Standard



IMPLEMENT



Radial



AW 711

AW 711 is an implement radial tire specially designed for modern farming, and suitable for general purpose applications. Thanks to its special tread compound, the AW 711 has an extended product life-cycle, whether it is used on soft or hard surfaces. The low rolling resistance during on-road travel ensures significant savings in fuel consumption.

∅ 16.5"

Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
265/70 R 16.5	134 A8/B	8.25	-	264	773	343	2286	370	SR
305/70 R 16.5	148 A8/B	9.75	-	325	851	371	2552	410	SR
340/60 R 16.5	145 A8/B	11	-	324	820	368	2476	390	SR
380/55 R 16.5	150 A8/B	12	11.75	360	830	372	2500	390	SR
395/55 R 16.5	152 A8/B	12	-	394	838	365	2516	400	SR

Load capacity (kg/tire)

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0
50	680	895	1085	1255	1445	1635	1760	1930	2120	
40	680	895	1085	1255	1445	1635	1760	1930	2120	
30	760	1000	1215	1405	1615	1830	1975	2165	2375	
25	810	1065	1290	1490	1720	1945	2100	2300	2525	
20	860	1125	1365	1580	1820	2060	2225	2435	2675	
10	955	1250	1515	1755	2020	2290	2470	2705	2970	

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0
50	945	1230	1515	1735	2020	2300	2460	2710	2965	3150
40	945	1230	1515	1735	2020	2300	2460	2710	2965	3150
30	1060	1380	1695	1945	2260	2580	2755	3040	3320	3530
25	1125	1465	1800	2065	2400	2740	2925	3225	3525	3750
20	1195	1550	1910	2185	2545	2900	3100	3415	3735	3970
10	1325	1720	2120	2430	2825	3220	3440	3795	4150	4410

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0
50	870	1135	1395	1595	1860	2120	2265	2495	2730	2900
40	870	1135	1395	1595	1860	2120	2265	2495	2730	2900
30	975	1270	1560	1790	2080	2375	2535	2795	3055	3250
25	1040	1350	1660	1905	2215	2525	2695	2975	3250	3455
20	1100	1430	1755	2015	2340	2670	2855	3145	3440	3655
10	1220	1585	1950	2235	2600	2965	3170	3495	3820	4060

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0
50	1005	1310	1610	1845	2145	2450	2615	2885	3150	3350
40	1005	1310	1610	1845	2145	2450	2615	2885	3150	3350
30	1130	1465	1805	2070	2405	2745	2930	3230	3530	3755
25	1200	1560	1920	2195	2555	2915	3115	3435	3755	3990
20	1270	1650	2030	2325	2705	3085	3300	3635	3975	4225
10	1410	1830	2255	2580	3005	3425	3660	4035	4410	4690

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0
50	1065	1385	1705	1955	2275	2595	2770	3055	3340	3550
40	1065	1385	1705	1955	2275	2595	2770	3055	3340	3550
30	1195	1555	1915	2190	2550	2910	3105	3425	3745	3980
25	1270	1650	2030	2325	2705	3085	3300	3635	3975	4225
20	1345	1750	2150	2465	2865	3270	3495	3850	4210	4475
10	1495	1940	2390	2735	3185	3630	3880	4275	4675	4970

SR: Stubble Resistant

Technologies

VF Technology

Steel Belted

Performance

High Load Capacity

Durability

Fuel Economy

Stubble Resistance

AW 711

	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Load capacity (kg/tire) km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.6
∅ 16.5"	VF 410/50 R 16.5	153 B	AG 11.75	-	410	835	350	2513	-	SB	From 10 to 50	1025	1345	1630	1890	2175	2465	2655	2910	3195	3650

∅ 17"	VF 480/45 R 17	167 A8/B	16.00	-	491	866	363	2644	410	SB	km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0
											From 10 to 50	1585	2020	2455	2780	3220	3655	4035	4415	4855	5450

∅ 18"	IF 340/65 R 18	153 A8/B	W 11	-	330	899	381	2662	450	SR	km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
											From 10 to 50	1170	1535	1865	2155	2485	2815	3030	3325	3650	

										km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	3.8	4.0	5.0	5.5
400/60 R 18	159 A8/B	14	13	394	945	419	2807	450	SR	50	1220	1585	1950	2235	2600	2965	3165	3490	3655	3815	4057	4375
										40	1220	1585	1950	2235	2600	2965	3165	3490	3655	3815	4057	4375
										30	1365	1775	2185	2500	2910	3320	3550	3910	4095	4275	4545	4900
										25	1450	1885	2320	2660	3095	3530	3770	4155	4350	4545	4830	5210
										20	1535	1995	2460	2815	3275	3735	3990	4400	4605	4810	5115	5515
										10	1705	2220	2730	3125	3640	4150	4435	4885	5115	5340	5680	6125

										km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0
440/55 R 18	159 A8/B	14	13	410	945	432	2893	450	SR	50	1315	1710	2100	2410	2800	3195	3415	3765	4115	4375
										40	1315	1710	2100	2410	2800	3195	3415	3765	4115	4375
										30	1470	1915	2355	2695	3140	3580	3825	4215	4610	4900
										25	1565	2035	2505	2870	3335	3805	4065	4485	4900	5210
										20	1655	2155	2650	3035	3530	4030	4305	4745	5185	5515
										10	1840	2390	2940	3370	3920	4475	4780	5270	5760	6125

∅ 19.5"	15 R 19.5	139 D	11.75	12.75	389	1019	452	3055	475	SR	km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	5.5
											65	660	855	1045	1170	1365	1535	1705	1850	2045	2285	2430
											50	840	1090	1340	1495	1745	1960	2180	2365	2615	2925	3110
											40	885	1145	1405	1565	1830	2055	2285	2480	2740	3065	3260
											25	960	1245	1530	1710	1995	2240	2490	2705	2990	3345	3555
											10	1335	1730	2125	2370	2765	3110	3455	3755	4150	4640	4935

SR: Stubble Resistant - SB: Steel Belted

Technologies

VF Technology

Steel Belted

Performance

High Load Capacity

Durability

Fuel Economy

Stubble Resistance



Bias



AW 702

AW 702 has been developed for implement machinery and trailers in soil tillage and transport applications. This heavy-duty tire has been designed by BKT to provide a new level of durability. AW 702 is available in different versions to meet specific end-user needs.

∅ 12"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	2.50
	7.00 - 12	4.25	-	185	665	295	1948	STD	6	TL	95 A8		10 FR	965
													25 FR	820
													30 FR	775
													40 FR	690
	7.00 - 12	4.25	-	185	665	295	1948	AB	6	TL	95 A8		km/h - bar	2.50
													10 FR	965
													25 FR	820
													30 FR	775
													40 FR	690
	10.0/80 - 12	9.00	7.0	264	710	313	2080	STD	8	TL	116 A8		km/h - bar	3.10
													10 FR	1750
													25 FR	1490
													30 FR	1400
													40 FR	1250
	10.0/80 - 12	9.00	7.0	264	710	313	2080	STD	10	TL	121 A8		km/h - bar	3.90
													10 FR	2030
													25 FR	1725
													30 FR	1625
													40 FR	1450
	10.0/80 - 12	9.00	7.0	264	710	313	2080	AB	10	TL	121 A8		km/h - bar	3.90
													10 FR	2030
													25 FR	1725
													30 FR	1625
													40 FR	1450
	10.0/80 - 12	9.00	7.0	264	710	313	2080	SPL	10	TL	121 A8		km/h - bar	3.90
													10 FR	2030
													25 FR	1725
													30 FR	1625
													40 FR	1450
∅ 15.3"	10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	8	TT	119 A8		km/h - bar	3.10
													10 FR	1905
													25 FR	1620
													30 FR	1525
													40 FR	1360

AB: Aramid Belted - STD: Standard - SPL: Special

Technologies

- Aramid Belted
- Heavy Duty

Performance

- Durability
- High Load Capacity
- High Puncture Resistance
- Cut and Chip Resistance
- Stubble Resistance

AW 702

∅ 15.3" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.90
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	10	TT	123 A8		10 FR	2170
												25 FR	1845
												30 FR	1735
												40 FR	1550
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	10	TL	123 A8		km/h - bar	3.90
												10 FR	2170
												25 FR	1845
												30 FR	1735
												40 FR	1550
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	12	TT	126 A8		km/h - bar	4.70
												10 FR	2380
												25 FR	2025
												30 FR	1905
												40 FR	1700
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	12	TL	126 A8		km/h - bar	4.70
												10 FR	2380
												25 FR	2025
												30 FR	1905
												40 FR	1700
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	14	TT	130 A8		km/h - bar	5.50
												10 FR	2660
												25 FR	2260
												30 FR	2130
												40 FR	1900
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	14	TL	130 A8		km/h - bar	5.50
												10 FR	2660
												25 FR	2260
												30 FR	2130
												40 FR	1900
10.0/75 - 15.3	9.00	-	274	760	343	2227	SPL	14	TL	130 A8		km/h - bar	5.50
												10 FR	2660
												25 FR	2260
												30 FR	2130
												40 FR	1900
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	18	TL	135 A8		km/h - bar	7.10
												10 FR	3050
												25 FR	2595
												30 FR	2440
												40 FR	2180
10.0/75 - 15.3	9.00	-	274	760	343	2227	HD	18	TL	135 A8		km/h - bar	7.10
												10 FR	3050
												25 FR	2595
												30 FR	2440
												40 FR	2180

HD: Heavy Duty - STD: Standard - SPL: Special

Technologies

- Aramid Belted
- Heavy Duty

Performance

- Durability
- High Load Capacity
- High Puncture Resistance
- Cut and Chip Resistance
- Stubble Resistance

AW 702

∅ 15.3" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	7.10
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	22	TL	137 A8		10 FR	3220
												25 FR	2735
												30 FR	2575
												40 FR	2300
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	10	TT	131 A8		km/h - bar	3.40
												10 FR	2730
												25 FR	2320
												30 FR	2185
												40 FR	1950
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	10	TL	131 A8		km/h - bar	3.40
												10 FR	2730
												25 FR	2320
												30 FR	2185
												40 FR	1950
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	12	TT	135 A8		km/h - bar	4.10
												10 FR	3050
												25 FR	2595
												30 FR	2440
												40 FR	2180
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	12	TL	135 A8		km/h - bar	4.10
												10 FR	3050
												25 FR	2595
												30 FR	2440
												40 FR	2180
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	14	TT	139 A8		km/h - bar	4.75
												10 FR	3400
												25 FR	2890
												30 FR	2720
												40 FR	2430
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	14	TL	139 A8		km/h - bar	4.75
												10 FR	3400
												25 FR	2890
												30 FR	2720
												40 FR	2430
11.5/80 - 15.3	9.00	-	297	844	370	2473	AB	14	TL	139 A8		km/h - bar	4.75
												10 FR	3400
												25 FR	2890
												30 FR	2720
												40 FR	2430
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	16	TT	141 A8		km/h - bar	5.40
												10 FR	3605
												25 FR	3065
												30 FR	2885
												40 FR	2575

AB: Aramid Belted - STD: Standard

Technologies

- Aramid Belted
- Heavy Duty

Performance

- Durability
- High Load Capacity
- High Puncture Resistance
- Cut and Chip Resistance
- Stubble Resistance

AW 702

∅ 15.3" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	5.40
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	16	TL	141 A8		10 FR	3605
												25 FR	3065
												30 FR	2885
												40 FR	2575
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	18	TT	143 A8		km/h - bar	6.10
												10 FR	3815
												25 FR	3245
												30 FR	3050
												40 FR	2725
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	18	TL	143 A8		km/h - bar	6.10
												10 FR	3815
												25 FR	3245
												30 FR	3050
												40 FR	2725
12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	14	TT	142 A8		km/h - bar	4.30
												10 FR	3710
												25 FR	3155
												30 FR	2970
												40 FR	2650
12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	14	TL	142 A8		km/h - bar	4.30
												10 FR	3710
												25 FR	3155
												30 FR	2970
												40 FR	2650
12.5/80 - 15.3	9.00	-	312	885	387	2593	SPL	14	TT	142 A8		km/h - bar	4.30
												10 FR	3710
												25 FR	3155
												30 FR	2970
												40 FR	2650
12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	16	TT	144 A8		km/h - bar	4.90
												10 FR	3920
												25 FR	3330
												30 FR	3135
												40 FR	2800
12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	16	TL	144 A8		km/h - bar	4.90
												10 FR	3920
												25 FR	3330
												30 FR	3135
												40 FR	2800
12.5/80 - 15.3	9.00	-	312	885	387	2593	SPL	18	TL	146 A8		km/h - bar	5.50
												10 FR	4200
												25 FR	3570
												30 FR	3360
												40 FR	3000

STD: Standard - SPL: Special

Technologies

- Aramid Belted
- Heavy Duty

Performance

- Durability
- High Load Capacity
- High Puncture Resistance
- Cut and Chip Resistance
- Stubble Resistance

AW 702

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	2.75
	6.00 - 16	4.00 E	4.50 E ; 4½ K	169	722	337	2150	STD	6	TT	95 A8		10 FR	965
													25 FR	820
													30 FR	775
													40 FR	690
	6.00 - 16	4.00 E	4.50 E ; 4½ K	169	722	337	2150	STD	6	TL	95 A8		km/h - bar	2.75
													10 FR	965
													25 FR	820
													30 FR	775
													40 FR	690
	6.00 - 16	4.00 E	4.50 E ; 4½ K	169	722	337	2150	STD	8	TT	103 A8		km/h - bar	4.00
													10 FR	1225
													25 FR	1040
													30 FR	980
													40 FR	875
	6.00 - 16	4.00 E	4.50 E ; 4½ K	169	722	337	2150	IND	8	TT	103 A8		km/h - bar	4.00
													10 FR	1225
													25 FR	1040
													30 FR	980
													40 FR	875
	10.50 - 16	6.00 T	-	305	975	445	2986	STD	14	TT	-		km/h - bar	6.90
													50	3215
	10.5/65 - 16	W 9	W 8 ; W 8 L	265	760	343	2112	STD	10	TT	123 A8		km/h - bar	3.80
													10 FR	2170
													25 FR	1845
													30 FR	1735
													40 FR	1550
	10.5/65 - 16	W 9	W 8 ; W 8 L	265	760	343	2112	STD	10	TL	123 A8		km/h - bar	3.80
													10 FR	2170
													25 FR	1845
													30 FR	1735
													40 FR	1550
	10.5/65 - 16	W 9	W 8 ; W 8 L	265	760	343	2112	SPL	10	TL	123 A8		km/h - bar	3.80
													10 FR	2170
													25 FR	1845
													30 FR	1735
													40 FR	1550
	10.5/65 - 16	W 9	W 8 ; W 8 L	265	760	343	2112	STD	14	TT	130 A8		km/h - bar	5.30
													10 FR	2660
													25 FR	2260
													30 FR	2130
													40 FR	1900

STD: Standard - SPL: Special - IND: Industrial

Technologies

- Aramid Belted
- Heavy Duty

Performance

- Durability
- High Load Capacity
- High Puncture Resistance
- Cut and Chip Resistance
- Stubble Resistance

AW 702

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	5.30
	10.5/65 - 16	W 9	W 8 ; W 8 L	265	760	343	2112	STD	14	TL	130 A8		10 FR	2660
													25 FR	2260
													30 FR	2130
													40 FR	1900
	10.5/65 - 16	W 9	W 8 ; W 8 L	265	760	343	2112	IND	14	TL	130 A8		km/h - bar	5.30
													10 FR	2660
													25 FR	2260
													30 FR	2130
													40 FR	1900
	13.0/55 - 16	11.0	-	336	770	345	2256	STD	12	TL	130 A8		km/h - bar	3.60
													10 FR	2660
													25 FR	2260
													30 FR	2130
													40 FR	1900
	13.0/55 - 16	11.0	-	336	770	345	2256	STD	14	TL	133 A8		km/h - bar	4.20
													10 FR	2885
													25 FR	2450
													30 FR	2305
													40 FR	2060
	13.0/55 - 16	11.0	-	336	770	345	2256	STD	18	TL	138 A8		km/h - bar	5.40
													10 FR	3305
													25 FR	2810
													30 FR	2645
													40 FR	2360
	13.0/75 - 16	11.0	9 ; W 9 ; W 11	340	890	396	2726	STD	10	TL	135 A8		km/h - bar	3.00
													10 FR	3050
													25 FR	2595
													30 FR	2440
													40 FR	2180
∅ 18"	**10.5/80 - 18**	W 9	W 8 ; 9	275	885	395	2593	STD	10	TL	131 A8		km/h - bar	3.70
													10 FR	2730
													25 FR	2320
													30 FR	2185
													40 FR	1950
	10.5/80 - 18	W 9	W 8 ; 9	275	885	395	2593	STD	14	TL	138 A8		km/h - bar	5.10
													10 FR	3305
													25 FR	2810
													30 FR	2645
													40 FR	2360
	12.5/80 - 18	W 9	11	308	965	432	2827	STD	10	TL	139 A8		km/h - bar	3.10
													10 FR	3400
													25 FR	2890
													30 FR	2720
													40 FR	2430

STD: Standard - SPL: Special - IND: Industrial

Technologies

Aramid Belted

Heavy Duty

Performance

Durability

High Load Capacity

High Puncture Resistance

Cut and Chip Resistance

Stubble Resistance

AW 702

∅ 18" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.70
12.5/80 - 18	W 9	11	308	965	432	2827	STD	12	TL	142 A8		10 FR	3710
												25 FR	3155
												30 FR	2970
												40 FR	2650
12.5/80 - 18	W 9	11	308	965	432	2827	STD	14	TL	145 A8		km/h - bar	4.30
												10 FR	4060
												25 FR	3450
												30 FR	3250
												40 FR	2900
12.5/80 - 18	W 9	11	308	965	432	2827	SPL	14	TL	145 A8		km/h - bar	4.30
												10 FR	4060
												25 FR	3450
												30 FR	3250
												40 FR	2900
12.5/80 - 18	W 9	11	308	965	432	2827	STD	16	TL	148 A8		km/h - bar	4.90
												10 FR	4410
												25 FR	3750
												30 FR	3530
												40 FR	3150
12.5/80 - 18	W 9	11	308	965	432	2827	SPL	16	TL	148 A8		km/h - bar	4.90
												10 FR	4410
												25 FR	3750
												30 FR	3530
												40 FR	3150
12.5/80 - 18	W 9	11	308	965	432	2827	STD	18	TL	150 A8		km/h - bar	5.50
												10 FR	4690
												25 FR	3985
												30 FR	3750
												40 FR	3350
13.0/65 - 18	11.0	-	336	890	398	2608	STD	14	TT	141 A8		km/h - bar	4.30
												10 FR	3605
												25 FR	3065
												30 FR	2885
												40 FR	2575
13.0/65 - 18	11.0	-	336	890	398	2608	STD	14	TL	141 A8		km/h - bar	4.30
												10 FR	3605
												25 FR	3065
												30 FR	2885
												40 FR	2575
13.0/65 - 18	11.0	-	336	890	398	2608	STD	16	TL	144 A8		km/h - bar	4.90
												10 FR	3920
												25 FR	3330
												30 FR	3135
												40 FR	2800
14.5/80 - 18	11.0	12 ; 13	362	1047	446	3068	STD	12	TT	155 A8		km/h - bar	3.40
												10 FR	4550
												25 FR	3870
												30 FR	3640
												40 FR	3250

STD: Standard - SPL: Special

Technologies

- Aramid Belted
- Heavy Duty

Performance

- Durability
- High Load Capacity
- High Puncture Resistance
- Cut and Chip Resistance
- Stubble Resistance

Bias



AW 705

AW 705 has been developed for implement machinery and trailers in soil tillage and transport applications. It is ideal for modern farming both on and off the road. AW 705 is available also in a "special" version, which offers improved durability.

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 2.80
∅ 16"	14.0/65 - 16	11.0	-	353	870	388	2549	STD	10	TT	134 A8		10 FR	2970
													25 FR	2525
													30 FR	2375
													40 FR	2120
	14.0/65 - 16	11.0	-	353	870	388	2549	STD	10	TL	134 A8		km/h - bar	2.80
													10 FR	2970
													25 FR	2525
													30 FR	2375
													40 FR	2120
	14.0/65 - 16	11.0	-	353	870	388	2549	STD	14	TT	142 A8		km/h - bar	4.00
													10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
	14.0/65 - 16	11.0	-	353	870	388	2549	STD	14	TL	142 A8		km/h - bar	4.00
													10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
∅ 17"	15.0/55 - 17	13.00	13 ; W 13	391	850	391	2575	STD	10	TL	134 A8		km/h - bar	2.60
													10 FR	2970
													25 FR	2525
													30 FR	2375
													40 FR	2120
	15.0/55 - 17	13.00	13 ; W 13	391	850	391	2575	SPL	10	TL	134 A8		km/h - bar	2.60
													10 FR	2970
													25 FR	2525
													30 FR	2375
													40 FR	2120
	15.0/55 - 17	13.00	13 ; W 13	391	850	391	2575	STD	12	TL	138 A8		km/h - bar	3.10
													10 FR	3305
													25 FR	2810
													30 FR	2645
													40 FR	2360

Performance

Durability

High Load Capacity

STD: Standard - SPL: Special

AW 705

∅ 17"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.70
	15.0/55 - 17	13.00	13 ; W 13	391	850	391	2575	STD	14	TL	141 A8		10 FR	3605
													25 FR	3065
													30 FR	2885
													40 FR	2575
													km/h - bar	**4.70**
	15.0/55 - 17	13.00	13 ; W 13	391	850	391	2575	STD	18	TL	146 A8		10 FR	4200
													25 FR	3570
													30 FR	3360
													40 FR	3000
													km/h - bar	**7.10**
	15.0/55 - 17	13.00	13 ; W 13	391	850	391	2575	STD	26	TL	155 A8		10 FR	5425
													25 FR	4610
													30 FR	4340
													40 FR	3875
∅ 18"	**15.0/70 - 18**	13.00	13 ; W 13	405	1010	447	3092	STD	12	TL	145 A8		km/h - bar	**3.10**
													10 FR	4060
													25 FR	3450
													30 FR	3250
													40 FR	2900
	15.0/70 - 18	13.00	13 ; W 13	405	1010	447	3092	STD	14	TL	148 A8		km/h - bar	**3.60**
													10 FR	4410
													25 FR	3750
													30 FR	3530
													40 FR	3150
	15.0/70 - 18	13.00	13 ; W 13	405	1010	447	3092	STD	16	TL	151 A8		km/h - bar	**4.25**
													10 FR	4830
													25 FR	4105
													30 FR	3865
													40 FR	3450
∅ 20"	**16.0/70 - 20**	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	12	TT	151 A8		km/h - bar	**3.00**
													10 FR	4830
													25 FR	4105
													30 FR	3865
													40 FR	3450
	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	12	TL	151 A8		km/h - bar	**3.00**
													10 FR	4830
													25 FR	4105
													30 FR	3865
													40 FR	3450
	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	14	TT	154 A8		km/h - bar	**3.50**
													10 FR	5250
													25 FR	4465
													30 FR	4200
													40 FR	3750

Performance

Durability

High Load Capacity

STD: Standard

AW 705

∅ 20"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.50
	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	14	TL	154 A8		10 FR	5250
													25 FR	4465
													30 FR	4200
													40 FR	3750
	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	SPL	14	TL	154 A8		km/h - bar	3.50
													10 FR	5250
													25 FR	4465
													30 FR	4200
													40 FR	3750
	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	16	TL	156 A8		km/h - bar	4.00
													10 FR	5600
													25 FR	4760
													30 FR	4480
													40 FR	4000
∅ 22.5"	**400/55 - 22.5**	AG 11.75	12.25; AG 13.00	405	1016	443	3072	STD	18	TL	154 A8		km/h - bar	4.50
													10 FR	5250
													25 FR	4465
													30 FR	4200
													40 FR	3750
	400/55 - 22.5	AG 11.75	12.25; AG 13.00	405	1016	443	3072	SR	20	TL	156 A8		km/h - bar	5.00
													10 FR	5600
													25 FR	4760
													30 FR	4480
													40 FR	4000

STD: Standard - SPL: Special -SR: Stubble Resistant

Performance

Durability

High Load Capacity



Bias



AW 708

AW 708 has been developed for soil tillage, transport and hay harvesting applications with implement machinery, trailers and hay harvesters/balers. It is ideal for modern farming both on and off the road.

∅ 15.5" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	2.50
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	10	TL	136 A8		10 FR	3135
												25 FR	2665
												30 FR	2510
												40 FR	2240
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	14	TT	145 A8		km/h - bar	3.60
												10 FR	4060
												25 FR	3450
												30 FR	3250
												40 FR	2900
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	14	TL	145 A8		km/h - bar	3.60
												10 FR	4060
												25 FR	3450
												30 FR	3250
												40 FR	2900
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	18	TL	149 A8		km/h - bar	4.50
												10 FR	4550
												25 FR	3870
												30 FR	3640
												40 FR	3250
400/60 - 15.5	AG 13.00	-	405	875	380	2564	HD	18	TL	149 A8		km/h - bar	4.50
												10 FR	4550
												25 FR	3870
												30 FR	3640
												40 FR	3250
400/60 - 15.5	AG 13.00	-	405	875	380	2564	IND	18	TL	149 A8		km/h - bar	4.50
												10 FR	4550
												25 FR	3870
												30 FR	3640
												40 FR	3250
400/60 - 15.5	AG 13.00	-	405	875	380	2564	SPL	18	TT	149 A8		km/h - bar	4.50
												10 FR	4550
												25 FR	3870
												30 FR	3640
												40 FR	3250

STD: Standard - SPL: Special - HD: Heavy Duty - IND: Industrial

Technologies

Heavy Duty

Performance

Durability

High Load Capacity

Cut and Chip Resistance

AW 708

∅ 15.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	4.50
	400/60 - 15.5	AG 13.00	-	405	875	380	2564	SPL	18	TL	149 A8		10 FR	4550
													25 FR	3870
													30 FR	3640
													40 FR	3250
	400/60 - 15.5	AG 13.00	-	405	875	380	2564	SR	18	TL	149 A8		km/h - bar	4.50
													10 FR	4550
													25 FR	3870
													30 FR	3640
													40 FR	3250
∅ 17"	19.0/45 - 17	16.00	-	491	866	380	2536	STD	10	TL	138 A8		km/h - bar	2.25
													10 FR	3305
													25 FR	2810
													30 FR	2645
													40 FR	2360
	19.0/45 - 17	16.00	-	491	866	380	2536	STD	14	TL	144 A8		km/h - bar	2.80
													10 FR	3920
													25 FR	3330
													30 FR	3135
													40 FR	2800
	19.0/45 - 17	16.00	-	491	866	380	2536	STD	18	TL	148 A8		km/h - bar	3.30
													10 FR	4410
													25 FR	3750
													30 FR	3530
													40 FR	3150
	19.0/45 - 17	16.00	-	491	866	380	2536	SR	22	TL	152 A8		km/h - bar	3.90
													10 FR	4970
													25 FR	4225
													30 FR	3975
													40 FR	3550
	500/50 - 17	16.00	-	500	945	416	2750	STD	10	TL	140 A8		km/h - bar	2.00
													10 FR	3500
													25 FR	2975
													30 FR	2800
													40 FR	2500
	500/50 - 17	16.00	-	500	945	416	2750	STD	14	TL	149 A8		km/h - bar	2.80
													10 FR	4550
													25 FR	3870
													30 FR	3640
													40 FR	3250
	500/50 - 17	16.00	-	500	945	416	2750	STD	16	TL	152 A8		km/h - bar	3.20
													10 FR	4970
													25 FR	4225
													30 FR	3975
													40 FR	3550

STD: Standard - SPL: Special - SR: Stubble Resistant

Technologies

Heavy Duty

Performance

Durability

High Load Capacity

Cut and Chip Resistance

AW 708

∅ 17"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.60
	500/50 - 17	16.00	-	500	945	416	2750	STD	18	TL	154 A8		10 FR	5250
													25 FR	4465
													30 FR	4200
													40 FR	3750
	500/65 - 17	16.00	-	520	1070	462	3135	STD	18	TL	160 A8		km/h - bar	3.50
													10 FR	6300
													25 FR	5355
													30 FR	5040
													40 FR	4500
	520/50 - 17	16.00	-	519	952	404	2803	STD	-	TL	162 A8		km/h - bar	4.00
													10 FR	6650
													25 FR	5655
													30 FR	5320
													40 FR	4750

STD: Standard

Technologies

Heavy Duty

Performance

Durability

High Load Capacity

Cut and Chip Resistance



IMPLEMENT

Bias



AW 726

AW 726 has been specially designed for trailers and hay harvesters/balers in transport and soil tillage operations. It is best suited for both on-and-off-the-road usage. AW 726 shows excellent road performance, driving comfort and self-cleaning features. The low rolling resistance contributes to better fuel economy.

∅ 15.3"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	4.80
	11.5/80 - 15.3	9.00	-	300	855	-	-	STD	14	TL	126 A8	139 A8		10 FR	3400
														25 FR	2890
														30 FR	2720
														40 FR	2430
														10 DW	2380
														25 DW	2025
														30 DW	1905
														40 DW	1700

∅ 15.5"														km/h - bar	4.50
	400/60 - 15.5	AG 13.00	-	400	875	-	-	STD	18	TL	137 A8	149 A8		10 FR	4550
														25 FR	3870
														30 FR	3640
														40 FR	3250
														10 DW	3220
														25 DW	2735
														30 DW	2575
														40 DW	2300

∅ 17"														km/h - bar	2.00
	420/55 - 17	13.00	-	415	890	392	2584	STD	-	TL	121 A8	133 A8		10 FR	2885
														25 FR	2450
														30 FR	2305
														40 FR	2060
														10 DW	2030
														25 DW	1725
														30 DW	1625
														40 DW	1450

STD: Standard

Technologies

Block Pattern

Performance

Durability

Self-Cleaning



Bias



AW 729

AW 729 is an agricultural tire specifically designed for transport, hay harvesting, baling and soil tillage applications. Its rounded shoulder and three central grooves tread design provide low soil compaction and avoids damages to the field.
AW 729 is the ideal tire for modern farming, and it is suited for both on-and-off-the-road usage.

∅ 17"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 2.60
	15.0/55 - 17	13.00	13; W13	385	850	-	-	STD	10	TL	122 A8	134 A8		10 FR	2970
														25 FR	2520
														30 FR	2375
														40 FR	2120
														10 DW	2100
														25 DW	1785
														30 DW	1680
														40 DW	1500

STD: Standard

Performance

Reduced Soil Compaction

Self-Cleaning

Durability

On/Off Road

Bias



TERRA TRAX

TERRA TRAX has been specially designed for fodder and feeder implement. It is best suited for both on-and-off-the-road usage. TERRA TRAX shows excellent road performance, driving comfort and self-cleaning features. The low rolling resistance contributes to better fuel economy

∅ 17.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 6.00
	400/45L - 17.5	14.00	-	398	785	-	-	STD	14	TL	156 A8		40	4000

STD: Standard

Performance

Road Oriented

Comfort

Self-Cleaning

Fuel Economy

Bias



AW 909

AW 909 has been developed for soil tillage and transport applications with implement machinery and trailers. It is ideal for modern farming both on and off the road. Besides, it provides a high level of handling comfort.

Performance

Handling & Comfort

∅ 12"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire)	
													km/h - bar	3.10
	10.0/75 - 12	9.00	7.0	264	710	313	2080	STD	8	TL	116 A8		10 FR	1750
													25 FR	1490
													30 FR	1400
													40 FR	1250
													km/h - bar	3.10
	10.0/80 - 12	9.00	7.0	264	710	313	2080	STD	8	TL	116 A8		10 FR	1750
													25 FR	1490
													30 FR	1400
													40 FR	1250
													km/h - bar	3.90
	10.0/80 - 12	9.00	7.0	264	710	313	2080	STD	10	TL	121 A8		10 FR	2030
													25 FR	1725
													30 FR	1625
													40 FR	1450
∅ 15.3"													km/h - bar	3.90
	10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	10	TL	123 A8		10 FR	2170
													25 FR	1845
													30 FR	1735
													40 FR	1550
													km/h - bar	4.70
	10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	12	TL	126 A8		10 FR	2380
													25 FR	2025
													30 FR	1905
													40 FR	1700
													km/h - bar	5.50
	10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	14	TL	130 A8		10 FR	2660
													25 FR	2260
													30 FR	2130
													40 FR	1900
													km/h - bar	7.10
	10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	18	TL	135 A8		10 FR	3050
													25 FR	2595
													30 FR	2440
													40 FR	2180
													km/h - bar	3.40
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	10	TL	131 A8		10 FR	2730
													25 FR	2320
													30 FR	2185
													40 FR	1950

STD: Standard

AW 909

Performance

Handling & Comfort

∅ 15.3"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire)	
													km/h - bar	4.10
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	12	TL	135 A8		10 FR	3050
													25 FR	2595
													30 FR	2440
													40 FR	2180
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	14	TL	139 A8		km/h - bar	4.75
													10 FR	3400
													25 FR	2890
													30 FR	2720
													40 FR	2430
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	16	TT	141 A8		km/h - bar	5.40
													10 FR	3605
													25 FR	3065
													30 FR	2885
													40 FR	2575
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	16	TL	141 A8		km/h - bar	5.40
													10 FR	3605
													25 FR	3065
													30 FR	2885
													40 FR	2575
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	18	TL	143 A8		km/h - bar	6.10
													10 FR	3815
													25 FR	3245
													30 FR	3050
													40 FR	2725
	12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	14	TL	142 A8		km/h - bar	4.30
													10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
∅ 17"	15.0/55 - 17	13.00	13	391	850	377	2490	STD	10	TL	134 A8		km/h - bar	2.60
													10 FR	2970
													25 FR	2525
													30 FR	2375
													40 FR	2120
	15.0/55 - 17	13.00	13	391	850	377	2490	STD	12	TL	138 A8		km/h - bar	3.10
													10 FR	3305
													25 FR	2810
													30 FR	2645
													40 FR	2360
	15.0/55 - 17	13.00	13	391	850	377	2490	STD	14	TL	141 A8		km/h - bar	3.70
													10 FR	3605
													25 FR	3065
													30 FR	2885
													40 FR	2575

STD: Standard

Bias



AW 09

AW 09 has been developed for soil tillage and transport applications with implement machinery and trailers. It is ideal for modern farming both on and off the road. AW 09 is the right tire to be used in all operating conditions which require excellent handling features.

∅ 15.3" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	3.20
260/70 - 15.3	9.00	-	268	753	335	2206	STD	-	TL	110 A8	122 A8	10 FR	2100
												25 FR	1785
												30 FR	1680
												40 FR	1500
												10 DW	1485
												25 DW	1260
												30 DW	1185
												40 DW	1060

260/70 - 15.3	9.00	-	268	753	335	2206	STD	-	TL	114 A8	126 A8	km/h - bar	3.60
												10 FR	2380
												25 FR	2025
												30 FR	1905
												40 FR	1700
												10 DW	1650
												25 DW	1405
												30 DW	1320
												40 DW	1180

260/70 - 15.3	9.00	-	268	753	335	2206	STD	-	TL	119 A8	131 A8	km/h - bar	5.00
												10 FR	2730
												25 FR	2320
												30 FR	2185
												40 FR	1950
												10 DW	1905
												25 DW	1620
												30 DW	1525
												40 DW	1360

300/80 - 15.3	9.00	-	295	860	376	2520	STD	-	TL	120 A8	132 A8	km/h - bar	2.80
												10 FR	2800
												25 FR	2380
												30 FR	2240
												40 FR	2000
												10 DW	1960
												25 DW	1665
												30 DW	1570
												40 DW	1400

STD: Standard

Technologies

Special Compound

Reinforced Carcass

Performance

Cut and Chip Resistance

Durability

High Load Capacity

Stubble Resistance

AW 09

∅ 15.3"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.60
	300/80 - 15.3	9.00	-	295	860	376	2520	STD	-	TL	126 A8	138 A8		10 FR	3305
														25 FR	2810
														30 FR	2645
														40 FR	2360
														10 DW	2380
														25 DW	2025
														30 DW	1905
														40 DW	1700
	300/80 - 15.3	9.00	-	295	860	376	2520	STD	-	TL	129 A8	141 A8		km/h - bar	4.00
														10 FR	3605
														25 FR	3065
														30 FR	2885
														40 FR	2575
														10 DW	2590
														25 DW	2200
														30 DW	2070
														40 DW	1850
	320/80 - 15.3	9.00	-	309	901	392	2640	STD	-	TL	133 A8	145 A8		km/h - bar	4.00
														10 FR	4060
														25 FR	3450
														30 FR	3250
														40 FR	2900
														10 DW	2885
														25 DW	2450
														30 DW	2305
														40 DW	2060
∅ 15.5"	400/60 - 15.5	AG 13.00	-	404	874	382	2561	STD	-	TL	132 A8	145 A8		km/h - bar	3.60
														10 FR	4060
														25 FR	3450
														30 FR	3250
														40 FR	2900
														10 DW	2800
														25 DW	2380
														30 DW	2240
														40 DW	2000
∅ 17"	380/55 - 17	13.00	-	390	850	377	2491	STD	-	TL	125 A8	138 A8		km/h - bar	2.80
														10 FR	3305
														25 FR	2810
														30 FR	2645
														40 FR	2360
														10 DW	2310
														25 DW	1965
														30 DW	1850
														40 DW	1650

STD: Standard

Technologies

Special Compound

Reinforced Carcass

Performance

Cut and Chip Resistance

Durability

High Load Capacity

Stubble Resistance

IMPLEMENT

AW 09

∅ 17"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 3.20
	380/55 - 17	13.00	-	390	850	377	2491	STD	-	TL	128 A8	141 A8		**10 FR**	3605
														25 FR	3065
														30 FR	2885
														40 FR	2575
														10 DW	2520
														25 DW	2140
														30 DW	2015
														40 DW	1800

STD: Standard

Technologies

Special Compound

Reinforced Carcass

Performance

Cut and Chip Resistance

Durability

High Load Capacity

Stubble Resistance



Bias



AW - 18

AW-18 has been designed for trailers and implement machinery employed in soil tillage operations. Its special design with non-directional lugs and a rounded shoulder area avoids crop damages while maneuvering. The tread pattern has been specifically developed to ensure top self-cleaning properties. AW-18 also stands for best driving comfort and reduced fuel consumption.

Performance

Self-Cleaning

Field Protection

Handling & Comfort

Fuel Economy

∅ 15.3"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 4.75
	11.5/80 - 15.3	9.00	-	297	845	-	-	STD	-	TL	-	139 A8		10 FR	3400
														25 FR	2890
														30 FR	2720
														40 FR	2430

STD: Standard

Bias



BK 4040

BK 4040 is specifically designed for agricultural implements and trailers. Its aggressive lug pattern provides excellent traction. The strong casing ensures best wear resistance. BK 4040 features a wide contact patch providing outstanding grip and stability.

Performance

Durability

High Load Capacity

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 4.10
	6.50 - 16	4.50 E	-	182	740	-	-	STD	10	TT	-		30	1010
	7.00 - 16	5.50	5.00 F	198	770	-	-	STD	12	TT	118 A6		km/h - bar	4.70
													30	1335

STD: Standard

IMPLEMENT

Bias



RIB IMPLEMENT (A)

RIB IMPLEMENT (A) has been engineered for trailers and implement machinery in transport and soil tillage applications. It is ideal for modern farming and shows top performance both on and off the road. RIB IMPLEMENT (A) is the right choice for all operating conditions which require a high level of handling as well as reduced soil compaction to preserve the crops.

∅ 12"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 2.30
	10.0/80 - 12	9.00	7.0	264	746	329	2186	STD	6	TL	110 A8		10 FR	1485
													25 FR	1260
													30 FR	1185
													40 FR	1060

STD: Standard

Performance

Reduced Soil Compaction

Handling & Comfort

IMPLEMENT

Bias



RIB IMPLEMENT (B)

RIB IMPLEMENT (B) has been specially designed for agricultural implements. This ideal tire for modern farming is made of a stubble-resistant compound providing excellent puncture protection. RIB IMPLEMENT (B) is a 5-rib tread pattern tire featuring a strong casing for a longer service life. It is the right choice for all operating conditions, which require high load capacity along with low rolling resistance.

∅ 17"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 4.0
	49 - 17	13.0	14.0	425	1200	-	-	STD	20	TL	146 A8/143 B	158 A8/154 B		40 FR	4250
														50 FR	3750
														40 DW	3000
														50 DW	2725

STD: Standard

Performance

High Load Capacity

Durability

Stubble Resistance

IMPLEMENT

Radial



RIB 713

RIB 713 is a steel-belted tire for agricultural implements. As a response to the increasing awareness of low soil compaction in modern farming, RIB 713 has been designed with IF technology. This enables the tire to carry heavier loads at lower inflation pressures and provides a larger footprint with uniform weight distribution. The steel-belted structure provides excellent puncture resistance and hence increased protection against stub penetration and relative damages, even if running into strong stubble. In addition, "D" speed rating (65 km/h - 40 mph) allows for fast road transfers. RIB 713 is BKT's contribution to maximize both the productivity and efficiency of your farming business.

∅ 15"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	
	IF 240/80 R 15	129 D	W 8	-	240	765	354	2324	360	SR	
	IF 265/85 R 15	121 D	W 8	-	260	831	368	2502	390	SR	
	IF 280/70 R 15	128 D	W 8	-	279	779	347	2356	360	SR	
	IF 280/70 R 15	134 D	W 8	-	279	779	347	2356	360	SR	
	IF 320/70 R 15	146 D	W10	-	320	823	367	2590	390	SR	

Load capacity (kg/tire)

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0
From 10 to 65	540	685	835	945	1095	1240	1370	1500	1650	1850

km/h - bar	0.8	1.2	1.6	2.0	2.4
From 10 to 65	700	900	1105	1265	1450

km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.6
From 10 to 65	670	775	885	1010	1120	1225	1335	1425	1570	1695	1800

km/h - bar	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4
From 10 to 65	775	885	1010	1120	1225	1335	1425	1570	1695	1800	1995	2120

km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	5.2
From 10 to 65	855	1090	1325	1500	1735	1970	2175	2380	2615	2935	3000

SR: Stubble Resistant

Technologies

IF Technology

Steel Belted

High Speed

Performance

Durability

High Load Capacity

Fuel Economy

Stubble Resistance



IMPLEMENT

Bias



RIB 774 (A)

RIB 774 (A) is a low section implement tire offering high load capacity with minimum soil compaction. It is ideal for modern farming and suitable for on- and off-the-road applications.

∅ 8"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.00
	18 X 8.50 - 8	7.00 I - 55 ; I - 70 ; I - 90	-	255	460	217	1390	STD	6	TL	85 A8		10 FR	720
													25 FR	615
													30 FR	575
													40 FR	515

∅ 17"													km/h - bar	2.60
	15.0/55 - 17	13.00	13	391	850	377	2490	STD	10	TL	134 A8		10 FR	2970
													25 FR	2525
													30 FR	2375
													40 FR	2120

													km/h - bar	3.70
	15.0/55 - 17	13.00	13	391	850	377	2490	STD	14	TL	141 A8		10 FR	3605
													25 FR	3065
													30 FR	2885
													40 FR	2575

STD: Standard

Performance

Durability

High Load Capacity



Bias



RIB 774 (B)

RIB 774 (B) is a low section implement tire. It is ideal for modern farming and suitable for on- and off-the-road applications.

∅ 14.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 5.00
	200/60 - 14.5	6.75	4.50 E ; 5.50 F	210	610	278	1785	STD	10	TT	106 A8		10 FR	1330
													25 FR	1130
													30 FR	1065
													40 FR	950
	200/60 - 14.5	6.75	4.50 E ; 5.50 F	210	610	278	1785	STD	10	TL	106 A8		km/h - bar	5.00
													10 FR	1330
													25 FR	1130
													30 FR	1065
													40 FR	950
	200/60 - 14.5	6.75	4.50 E ; 5.50 F	210	610	278	1785	HD	10	TT	106 A8		km/h - bar	5.00
													10 FR	1330
													25 FR	1130
													30 FR	1065
													40 FR	950
	200/60 - 14.5	6.75	4.50 E ; 5.50 F	210	610	278	1785	STD	14	TT	113 A8		km/h - bar	7.00
													10 FR	1610
													25 FR	1370
													30 FR	1290
													40 FR	1150
	200/60 - 14.5	6.75	4.50 E ; 5.50 F	210	610	278	1785	STD	14	TL	113 A8		km/h - bar	7.00
													10 FR	1610
													25 FR	1370
													30 FR	1290
													40 FR	1150
	250/65 - 14.5	AG 8.00	6.75	255	675	303	1978	STD	12	TL	119 A8		km/h - bar	4.70
													10 FR	1905
													25 FR	1620
													30 FR	1525
													40 FR	1360
	250/65 - 14.5	AG 8.00	6.75	255	675	303	1978	STD	14	TL	124 A8		km/h - bar	5.50
													10 FR	2240
													25 FR	1905
													30 FR	1790
													40 FR	1600

STD: Standard - HD: Heavy Duty

Technologies

Special Compound

Performance

Durability

High Load Capacity

RIB 774 (B)

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	5.30
	10.5/65 - 16	W 9	W 8 L	265	745	339	2183	STD	14	TT	130 A8		10 FR	2660
													25 FR	2260
													30 FR	2130
													40 FR	1900

													km/h - bar	5.30
	10.5/65 - 16	W 9	W 8 L	265	745	339	2183	IND	14	TT	130 A8		10 FR	2660
													25 FR	2260
													30 FR	2130
													40 FR	1900

∅ 18"	**12.0 - 18**	11.0	-	342	902	414	2688	STD	16	TL	150 A8		km/h - bar	5.20
													10 FR	4690
													25 FR	3985
													30 FR	3750
													40 FR	3350

STD: Standard - IND: Industrial

Technologies

Special Compound

Performance

Durability

High Load Capacity



Bias



RIB 774 (C)

RIB 774 (C) is a low section and narrow width implement tire. It is ideal for modern farming and suitable for on- and off-the-road applications.

∅ 17"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	2.25
	19.0/45 - 17	16.00	-	455	845	387	2518	STD	10	TL	138 A8		10 FR	3305
													25 FR	2810
													30 FR	2645
													40 FR	2360
∅ 17.5"	215/75 - 17.5	6.75	-	220	775	360	2310	STD	12	TL	134 A8		km/h - bar	6.90
													10 FR	2970
													25 FR	2525
													30 FR	2375
													40 FR	2120
	215/75 - 17.5	6.75	-	220	775	360	2310	STD	16	TL	139 A8		km/h - bar	9.00
													10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
	225/75 - 17.5	6.75	-	220	775	360	2310	STD	12	TL	134 A8		km/h - bar	6.90
													10 FR	2970
													25 FR	2525
													30 FR	2375
													40 FR	2120
	225/75 - 17.5	6.75	-	220	775	360	2310	STD	16	TL	139 A8		km/h - bar	9.00
													10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650

STD: Standard

Performance

Durability

High Load Capacity

IMPLEMENT

Bias



RIB 775

RIB 775 is a low-section cross-ply tire for transport and soil tillage applications with trailers and implement machinery. It offers excellent handling as well as reduced soil compaction.

∅ 12"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	2.60
	300/65 - 12	9.0	-	305	685	304	2007	STD	8	TL	116 A8		10 FR	1750
													25 FR	1490
													30 FR	1400
													40 FR	1250

STD: Standard

Performance

Durability

High Load Capacity

IMPLEMENT

Bias



RIB 900

RIB 900 is suitable for transport, soil tillage and hay harvesting operations with trailers, implement machinery and hay harvesters/balers. It offers excellent handling as well as reduced soil compaction.

∅ 15.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	2.50
	400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	10	TL	139 A8		10 FR	3135
													25 FR	2665
													30 FR	2510
													40 FR	2240
													km/h - bar	3.60
	400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	14	TL	145 A8		10 FR	4060
													25 FR	3450
													30 FR	3250
													40 FR	2900
													km/h - bar	4.00
	400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	16	TL	147 A8		10 FR	4305
													25 FR	3660
													30 FR	3445
													40 FR	3075

STD: Standard

Performance

Durability

High Load Capacity

IMPLEMENT

Bias



RIB MASTER

RIB MASTER is suitable for transport and soil tillage operations with trailers and implement machinery. This tire is ideal in all operating conditions that require excellent handling.

∅ 17.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 9.00
	215/75 - 17.5	6.75	-	220	775	360	2310	STD	16	TL	142 A8		10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650

STD: Standard

Performance

Durability

High Load Capacity

IMPLEMENT

Bias



FLOTATION RIB IMPLEMENT

FLOTATION RIB IMPLEMENT is a rib pattern tire for trailers in transport applications. It features high flotation capability and ensures significant fuel savings to boost the productivity of your business.

∅ 15"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 5.20
	31 X 13.50 - 15	10 LB	-	360	780	359	2129	STD	12	TL	-		50	1600

STD: Standard

Performance

Durability

High Load Capacity

IMPLEMENT

Bias



MULTI RIB

MULTI RIB is an agro-industrial tire for soil tillage and transport applications with 2WD tractors, trailers, and implement machinery. It offers excellent handling throughout its long product life-cycle.

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 4.10
	11.00 - 16	W 10 L	W 8 ; W 8 L	315	930	-	-	STD	12	TL	-		40	1550
	11.00 - 16	W 10 L	W 8 ; W 8 L	315	930	-	-	AB HD	12	TL	-		km/h - bar	4.10
													40	1550
	11.00 - 16	W 10 L	W 8 ; W 8 L	315	930	-	-	HD	12	TL	-		km/h - bar	4.10
													40	1550

STD: Standard - AB HD: Aramid Belted HD - HD: Heavy Duty

Technologies

Aramid Belted

Heavy Duty

Performance

Steering Control

Durability

Cut and Chip Resistance

High Puncture Resistance



Bias



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.

∅ 12"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	2.40
	6.5/80 - 12	5 J	5 JA	163	608	273	1851	STD	4	TT	72 A8	84 A8		10 FR	700
														25 FR	595
														30 FR	560
														40 FR	500
														10 DW	495
														25 DW	420
														30 DW	400
														40 DW	355

														km/h - bar	2.40
	6.5/80 - 12	5 J	5 JA	163	608	273	1851	STD	4	TL	72 A8	84 A8		10 FR	700
														25 FR	595
														30 FR	560
														40 FR	500
														10 DW	495
														25 DW	420
														30 DW	400
														40 DW	355

														km/h - bar	3.60
	6.5/80 - 12	5 J	5 JA	163	608	273	1851	STD	6	TT	80 A8	93 A8		10 FR	910
														25 FR	775
														30 FR	730
														40 FR	650
														10 DW	630
														25 DW	535
														30 DW	505
														40 DW	450

														km/h - bar	3.60
	6.5/80 - 12	5 J	5 JA	163	608	273	1851	STD	6	TL	80 A8	93 A8		10 FR	910
														25 FR	775
														30 FR	730
														40 FR	650
														10 DW	630
														25 DW	535
														30 DW	505
														40 DW	450

STD: Standard

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 12" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.60
6.5/80 - 12	5 J	5 JA	163	608	273	1851	HD	6	TT	80 A8	93 A8		10 FR	910
													25 FR	775
													30 FR	730
													40 FR	650
													10 DW	630
													25 DW	535
													30 DW	505
													40 DW	450

													km/h - bar	1.70
7.00 - 12	4.5	-	187	683	300	2001	STD	4	TT	75 A8	88 A8		10 FR	785
													25 FR	665
													30 FR	625
													40 FR	560
													10 DW	540
													25 DW	460
													30 DW	430
													40 DW	385

													km/h - bar	1.70
7.00 - 12	4.5	-	187	683	300	2001	STD	4	TL	75 A8	88 A8		10 FR	785
													25 FR	665
													30 FR	625
													40 FR	560
													10 DW	540
													25 DW	460
													30 DW	430
													40 DW	385

													km/h - bar	2.50
7.00 - 12	4.5	-	187	683	300	2001	STD	6	TL	83 A8	95 A8		10 FR	965
													25 FR	820
													30 FR	775
													40 FR	690
													10 DW	680
													25 DW	575
													30 DW	545
													40 DW	485

													km/h - bar	1.70
7.00 - 12	4.5	-	187	683	300	2001	STD	6	TT	83 A8	95 A8		10 FR	785
													25 FR	665
													30 FR	625
													40 FR	560
													10 DW	540
													25 DW	460
													30 DW	430
													40 DW	385

STD: Standard - HD: Heavy Duty

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 12"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.30
	7.00 - 12	4.5	-	187	683	300	2001	AB	8	TL	88 A8	100 A8		10 FR	1120
														25 FR	950
														30 FR	895
														40 FR	800
														10 DW	785
														25 DW	665
														30 DW	625
														40 DW	560
	7.00 - 12	4.5	-	187	683	300	2001	SPL	8	TL	88 A8	100 A8		km/h - bar	3.30
														10 FR	1120
														25 FR	950
														30 FR	895
														40 FR	800
														10 DW	785
														25 DW	665
														30 DW	625
														40 DW	560
	10.0/80 - 12	9.00	7.0	270	730	335	2233	STD	10	TL	109 A8	121 A8		km/h - bar	3.90
														10 FR	2030
														25 FR	1725
														30 FR	1625
														40 FR	1450
														10 DW	1440
														25 DW	1225
														30 DW	1155
														40 DW	1030
	11.0/65 - 12	9.00	-	273	700	321	2072	STD	8	TT	101 A8	114 A8		km/h - bar	2.90
														10 FR	1650
														25 FR	1405
														30 FR	1320
														40 FR	1180
														10 DW	1155
														25 DW	980
														30 DW	925
														40 DW	825
	11.0/65 - 12	9.00	-	273	700	321	2072	STD	8	TL	101 A8	114 A8		km/h - bar	2.90
														10 FR	1650
														25 FR	1405
														30 FR	1320
														40 FR	1180
														10 DW	1155
														25 DW	980
														30 DW	925
														40 DW	825
	26 X 12.00 - 12	10.50 AT	8.0 AT ; 8.5 AT ; 9.0 AT	310	648	298	1932	STD	-	TL	112 A6			km/h - bar	3.0
														30	1120

STD: Standard - AB: Aramid Belted - SPL: Special

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 15"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	2.30
	5.00 - 15	3.50 D	3.00 D ; 4.00 E ; 4 J	140	657	308	1957	STD	4	TT	67 A8	79 A8		10 FR	610
														25 FR	520
														30 FR	485
														40 FR	435
														10 DW	425
														25 DW	365
														30 DW	340
														40 DW	305

														km/h - bar	3.50
	5.00 - 15	3.50 D	3.00 D ; 4.00 E ; 4 J	140	657	308	1957	STD	6	TT	75 A8	88 A8		10 FR	785
														25 FR	665
														30 FR	625
														40 FR	560
														10 DW	540
														25 DW	460
														30 DW	430
														40 DW	385

														km/h - bar	3.50
	5.00 - 15	3.50 D	3.00 D ; 4.00 E ; 4 J	140	657	308	1957	STD	6	TL	75 A8	88 A8		10 FR	785
														25 FR	665
														30 FR	625
														40 FR	560
														10 DW	540
														25 DW	460
														30 DW	430
														40 DW	385

														km/h - bar	3.10
	7.5L - 15	6 LB	5 K ; 5½ J ; 5½ K	210	765	354	2280	STD	6	TT	97 A8	109 A8		10 FR	1440
														25 FR	1225
														30 FR	1155
														40 FR	1030
														10 DW	1020
														25 DW	870
														30 DW	820
														40 DW	730

														km/h - bar	3.70
	7.5L - 15	6 LB	5 K ; 5½ J ; 5½ K	210	765	354	2280	STD	8	TT	100 A8	113 A8		10 FR	1610
														25 FR	1370
														30 FR	1290
														40 FR	1150
														10 DW	1120
														25 DW	950
														30 DW	895
														40 DW	800

STD: Standard

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 15”

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.70
7.5L - 15	6 LB	5 K ; 5½ J ; 5½ K	210	765	354	2280	STD	8	TL	100 A8	113 A8		10 FR	1610
													25 FR	1370
													30 FR	1290
													40 FR	1150
													10 DW	1120
													25 DW	950
													30 DW	895
													40 DW	800

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		km/h - bar	3.70
7.5L - 15	6 LB	5 K ; 5½ J ; 5½ K	210	765	354	2280	AB HD	8	TL	100 A8	113 A8		10 FR	1610
													25 FR	1370
													30 FR	1290
													40 FR	1150
													10 DW	1120
													25 DW	950
													30 DW	895
													40 DW	800

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		km/h - bar	3.70
7.5L - 15	6 LB	5 K ; 5½ J ; 5½ K	210	765	354	2280	HD	8	TT	100 A8	113 A8		10 FR	1610
													25 FR	1370
													30 FR	1290
													40 FR	1150
													10 DW	1120
													25 DW	950
													30 DW	895
													40 DW	800

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		km/h - bar	3.00
400/50 - 15	13 LB	-	395	790	369	2387	STD	-	TL	109 A8	121 A8		10 FR	2030
													25 FR	1725
													30 FR	1625
													40 FR	1450
													10 DW	1440
													25 DW	1225
													30 DW	1155
													40 DW	1030

∅ 15.3”

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		km/h - bar	3.10
10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	8	TT	106 A8	119 A8		10 FR	1905
													25 FR	1620
													30 FR	1525
													40 FR	1360
													10 DW	1330
													25 DW	1130
													30 DW	1065
													40 DW	950

STD: Standard - HD: Heavy Duty - AB HD: Aramid Belted HD

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 15.3"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.10
	10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	8	TL	106 A8	119 A8		10 FR	1905
														25 FR	1620
														30 FR	1525
														40 FR	1360
														10 DW	1330
														25 DW	1130
														30 DW	1065
														40 DW	950
	10.0/75 - 15.3	9.00	-	264	780	345	2285	IND	8	TL	106 A8	119 A8		km/h - bar	3.10
														10 FR	1905
														25 FR	1620
														30 FR	1525
														40 FR	1360
														10 DW	1330
														25 DW	1130
														30 DW	1065
														40 DW	950
	10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	10	TL	111 A8	123 A8		km/h - bar	3.90
														10 FR	2170
														25 FR	1845
														30 FR	1735
														40 FR	1550
														10 DW	1525
														25 DW	1295
														30 DW	1220
														40 DW	1090
	10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	14	TL	118 A8	130 A8		km/h - bar	5.50
														10 FR	2660
														25 FR	2260
														30 FR	2130
														40 FR	1900
														10 DW	1850
														25 DW	1570
														30 DW	1480
														40 DW	1320
	10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	18	TT	122 A8	135 A8		km/h - bar	7.10
														10 FR	3050
														25 FR	2595
														30 FR	2440
														40 FR	2180
														10 DW	2100
														25 DW	1785
														30 DW	1680
														40 DW	1500

STD: Standard - IND: Industrial

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 15.3"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	7.10
	10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	18	TL	122 A8	135 A8		10 FR	3050
														25 FR	2595
														30 FR	2440
														40 FR	2180
														10 DW	2100
														25 DW	1785
														30 DW	1680
														40 DW	1500
	11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	8	TT	114 A8	126 A8		km/h - bar	2.70
														10 FR	2380
														25 FR	2025
														30 FR	1905
														40 FR	1700
														10 DW	1650
														25 DW	1405
														30 DW	1320
														40 DW	1180
	11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	8	TL	114 A8	126 A8		km/h - bar	2.70
														10 FR	2380
														25 FR	2025
														30 FR	1905
														40 FR	1700
														10 DW	1650
														25 DW	1405
														30 DW	1320
														40 DW	1180
	11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	10	TL	119 A8	131 A8		km/h - bar	3.40
														10 FR	2730
														25 FR	2320
														30 FR	2185
														40 FR	1950
														10 DW	1905
														25 DW	1620
														30 DW	1525
														40 DW	1360
	11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	12	TT	123 A8	135 A8		km/h - bar	4.10
														10 FR	3050
														25 FR	2595
														30 FR	2440
														40 FR	2180
														10 DW	2170
														25 DW	1845
														30 DW	1735
														40 DW	1550

STD: Standard

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 15.3"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 4.10
	11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	12	TL	123 A8	135 A8		10 FR	3050
														25 FR	2595
														30 FR	2440
														40 FR	2180
														10 DW	2170
														25 DW	1845
														30 DW	1735
														40 DW	1550
	11.5/80 - 15.3	9.00	-	290	867	380	2540	SR	12	TL	123 A8	135 A8		km/h - bar	4.10
														10 FR	3050
														25 FR	2595
														30 FR	2440
														40 FR	2180
														10 DW	2170
														25 DW	1845
														30 DW	1735
														40 DW	1550
	11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	14	TT	126 A8	139 A8		km/h - bar	4.80
														10 FR	3400
														25 FR	2890
														30 FR	2720
														40 FR	2430
														10 DW	2380
														25 DW	2025
														30 DW	1905
														40 DW	1700
	11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	14	TL	126 A8	139 A8		km/h - bar	4.80
														10 FR	3400
														25 FR	2890
														30 FR	2720
														40 FR	2430
														10 DW	2380
														25 DW	2025
														30 DW	1905
														40 DW	1700
	27 X 10 - 15.3	9.00	-	260	695	317	2071	STD	8	TT	95 A8	107 A8		km/h - bar	3.10
														10 FR	1365
														25 FR	1160
														30 FR	1090
														40 FR	975
														10 DW	965
														25 DW	820
														30 DW	775
														40 DW	690

STD: Standard - SR: Stubble Resistant

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 15.3"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.10
	27 X 10 - 15.3	9.00	-	260	695	317	2071	STD	8	TL	95 A8	107 A8		10 FR	1365
														25 FR	1160
														30 FR	1090
														40 FR	975
														10 DW	965
														25 DW	820
														30 DW	775
														40 DW	690

∅ 16"														km/h - bar	2.80
	4.00 - 16	3.00 D	2.50 C	110	628	-	-	STD	4	TT	66 A8	78 A8		10 FR	595
														25 FR	505
														30 FR	475
														40 FR	425
														10 DW	420
														25 DW	355
														30 DW	335
														40 DW	300

														km/h - bar	2.80
	6.00 - 16	4.00 E	4.50 E ; 4½ K	164	735	343	2190	STD	6	TT	83 A8	95 A8		10 FR	965
														25 FR	820
														30 FR	775
														40 FR	690
														10 DW	680
														25 DW	575
														30 DW	545
														40 DW	485

														km/h - bar	2.80
	6.00 - 16	4.00 E	4.50 E ; 4½ K	164	735	343	2190	HD	6	TT	83 A8	95 A8		10 FR	965
														25 FR	820
														30 FR	775
														40 FR	690
														10 DW	680
														25 DW	575
														30 DW	545
														40 DW	485

														km/h - bar	4.00
	6.00 - 16	4.00 E	4.50 E ; 4½ K	164	735	343	2190	HD	8	TT	91 A8	103 A8		10 FR	1225
														25 FR	1040
														30 FR	980
														40 FR	875
														10 DW	860
														25 DW	730
														30 DW	690
														40 DW	615

STD: Standard - HD: Heavy Duty

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	2.30
	7.50 - 16	5.50 F	4.50 E ; 5.00 F ; 4.00 E ; 5 K ; 6 LB ; 6.00 F	209	803	372	2393	STD	6	TT	92 A8	104 A8		10 FR	1260
														25 FR	1070
														30 FR	1010
														40 FR	900
														10 DW	880
														25 DW	750
														30 DW	705
														40 DW	630

													km/h - bar	3.20
7.50 - 16	5.50 F	4.50 E ; 5.00 F ; 4.00 E ; 5 K ; 6 LB ; 6.00 F	209	803	372	2393	STD	8	TT	99 A8	112 A8		10 FR	1570
													25 FR	1335
													30 FR	1255
													40 FR	1120
													10 DW	1085
													25 DW	920
													30 DW	870
													40 DW	775

													km/h - bar	3.20
7.50 - 16	5.50 F	4.50 E ; 5.00 F ; 4.00 E ; 5 K ; 6 LB ; 6.00 F	209	803	372	2393	STD	8	TL	99 A8	112 A8		10 FR	1570
													25 FR	1335
													30 FR	1255
													40 FR	1120
													10 DW	1085
													25 DW	920
													30 DW	870
													40 DW	775

													km/h - bar	3.20
7.50 - 16	5.50 F	4.50 E ; 5.00 F ; 4.00 E ; 5 K ; 6 LB ; 6.00 F	209	803	372	2393	HD	8	TT	99 A8	112 A8		10 FR	1570
													25 FR	1335
													30 FR	1255
													40 FR	1120
													10 DW	1085
													25 DW	920
													30 DW	870
													40 DW	775

													km/h - bar	4.40
9.0/70 - 16	W 7	-	222	760	355	2285	STD	10	TL	106 A8	119 A8		10 FR	1905
													25 FR	1620
													30 FR	1525
													40 FR	1360
													10 DW	1330
													25 DW	1130
													30 DW	1065
													40 DW	950

STD: Standard - HD: Heavy Duty

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.90
	270/75 - 16	9.00	-	250	810	-	-	STD	-	TL	111 A8	123 A8		10 FR	2170
														25 FR	1845
														30 FR	1735
														40 FR	1550
														10 DW	1525
														25 DW	1295
														30 DW	1220
														40 DW	1090

∅ 17"														km/h - bar	2.60
	15.0/55 - 17	13.00	13	380	890	395	2608	STD	10	TL	122 A8	134 A8		10 FR	2970
														25 FR	2525
														30 FR	2375
														40 FR	2120
														10 DW	2100
														25 DW	1785
														30 DW	1680
														40 DW	1500

														km/h - bar	3.60
	15.0/55 - 17	13.00	13	380	890	395	2608	STD	14	TL	128 A8	141 A8		10 FR	3605
														25 FR	3065
														30 FR	2885
														40 FR	2575
														10 DW	2590
														25 DW	2200
														30 DW	2070
														40 DW	1850

														km/h - bar	2.80
	19.0/45 - 17	16.00	-	465	865	389	2578	STD	14	TL	131 A8	144 A8		10 FR	3920
														25 FR	3330
														30 FR	3135
														40 FR	2800
														10 DW	2730
														25 DW	2320
														30 DW	2185
														40 DW	1950

														km/h - bar	3.00
	420/55 - 17	13.00	-	430	910	407	2712	STD	14	TL	129 A8	142 A8		10 FR	3710
														25 FR	3155
														30 FR	2970
														40 FR	2650
														10 DW	2590
														25 DW	2200
														30 DW	2070
														40 DW	1850

STD: Standard

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 17"

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	
420/55 - 17	13.00	-	430	910	407	2712	STD	16	TL	133 A8	145 A8	

Load capacity (kg/tire)

km/h - bar	3.50
10 FR	4060
25 FR	3450
30 FR	3250
40 FR	2900
10 DW	2885
25 DW	2450
30 DW	2305
40 DW	2060

∅ 18"

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	
7.50 - 18	5.50 F	4.50 E ; 6.00 F ; 5.00 F	209	854	407	2649	STD	6	TT	94 A8	106 A8	

km/h - bar	2.30
10 FR	1330
25 FR	1130
30 FR	1065
40 FR	950
10 DW	940
25 DW	795
30 DW	750
40 DW	670

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	
7.50 - 18	5.50 F	4.50 E ; 6.00 F ; 5.00 F	209	854	407	2649	STD	8	TT	101 A8	114 A8	

km/h - bar	3.10
10 FR	1650
25 FR	1405
30 FR	1320
40 FR	1180
10 DW	1155
25 DW	980
30 DW	925
40 DW	825

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	
10.5/80 - 18	W 9	9 ; W 8	274	907	405	2657	STD	10	TL	119 A8	131 A8	

km/h - bar	3.70
10 FR	2730
25 FR	2320
30 FR	2185
40 FR	1950
10 DW	1905
25 DW	1620
30 DW	1525
40 DW	1360

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	
12.5/80 - 18	W 9	9 ; 11	308	987	438	2892	STD	12	TL	129 A8	142 A8	

km/h - bar	3.70
10 FR	3710
25 FR	3155
30 FR	2970
40 FR	2650
10 DW	2590
25 DW	2200
30 DW	2070
40 DW	1850

STD: Standard

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 18"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.70
	12.5/80 - 18	W 9	9 ; 11	308	987	438	2892	SPL	12	TL	129 A8	142 A8		10 FR	3710
														25 FR	3155
														30 FR	2970
														40 FR	2650
														10 DW	2590
														25 DW	2200
														30 DW	2070
														40 DW	1850
	12.5/80 - 18	W 9	9 ; 11	308	987	438	2892	STD	16	TL	135 A8	148 A8		km/h - bar	4.90
														10 FR	4410
														25 FR	3750
														30 FR	3530
														40 FR	3150
														10 DW	3050
														25 DW	2595
														30 DW	2440
														40 DW	2180
	12.5/80 - 18	W 9	9 ; 11	308	987	438	2892	STD	18	TL	138 A8	150 A8		km/h - bar	5.50
														10 FR	4690
														25 FR	3985
														30 FR	3750
														40 FR	3350
														10 DW	3305
														25 DW	2810
														30 DW	2645
														40 DW	2360
∅ 20"	**7.50 - 20**	5.50 F	4.50 E ; 6.00 F ; 5.00 F	209	904	422	2695	STD	8	TT	103 A8	116 A8		km/h - bar	3.20
														10 FR	1750
														25 FR	1490
														30 FR	1400
														40 FR	1250
														10 DW	1225
														25 DW	1040
														30 DW	980
														40 DW	875
	16.0/70 - 20	13	12 SDC ; 14 ; 13 SDC	408	1097	487	3214	STD	10	TL	135 A8	147 A8		km/h - bar	2.50
														10 FR	4305
														25 FR	3660
														30 FR	3445
														40 FR	3075
														10 DW	3050
														25 DW	2595
														30 DW	2440
														40 DW	2180

STD: Standard - SPL: Special

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 20"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.00
	16.0/70 - 20	13	12 SDC ; 14 ; 13 SDC	408	1097	487	3214	STD	12	TL	139 A8	151 A8		10 FR	4830
														25 FR	4105
														30 FR	3865
														40 FR	3450
														10 DW	3400
														25 DW	2890
														30 DW	2720
														40 DW	2430
														km/h - bar	3.50
	16.0/70 - 20	13	12 SDC ; 14 ; 13 SDC	408	1097	487	3214	STD	14	TL	142 A8	154 A8		10 FR	5250
														25 FR	4465
														30 FR	4200
														40 FR	3750
														10 DW	3710
														25 DW	3155
														30 DW	2970
														40 DW	2650
														km/h - bar	4.00
	16.0/70 - 20	13	12 SDC ; 14 ; 13 SDC	408	1097	487	3214	STD	16	TL	144 A8	156 A8		10 FR	5600
														25 FR	4760
														30 FR	4480
														40 FR	4000
														10 DW	3920
														25 DW	3330
														30 DW	3135
														40 DW	2800
	400/70 - 20	13	12 SDC ; 14 ; 13 SDC	408	1097	487	3214	IND	-	TL	149 A8			km/h - bar	4.00
														10	4060
														25	3445
														30	3380
														40	3250
∅ 24"	**15.5/80 - 24**	W 12	W 13 ; W 14 L	384	1262	566	3655	STD	10	TL	142 A8	154 A8		km/h - bar	2.50
														10 FR	5250
														25 FR	4465
														30 FR	4200
														40 FR	3750
														10 DW	3710
														25 DW	3155
														30 DW	2970
														40 DW	2650

STD: Standard - IND: Industrial

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 24"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.00
	15.5/80 - 24	W 12	W 13 ; W 14 L	384	1262	566	3655	STD	12	TL	145 A8	157 A8		10 FR	5775
														25 FR	4910
														30 FR	4620
														40 FR	4125
														10 DW	4060
														25 DW	3450
														30 DW	3250
														40 DW	2900

														km/h - bar	3.50
	15.5/80 - 24	W 12	W 13 ; W 14 L	384	1262	566	3655	STD	14	TL	148 A8	160 A8		10 FR	6300
														25 FR	5355
														30 FR	5040
														40 FR	4500
														10 DW	4410
														25 DW	3750
														30 DW	3530
														40 DW	3150

														km/h - bar	3.50
	15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	SPL	14	TL	148 A8	160 A8		10 FR	6300
														25 FR	5355
														30 FR	5040
														40 FR	4500
														10 DW	4410
														25 DW	3750
														30 DW	3530
														40 DW	3150

														km/h - bar	4.00
	15.5/80 - 24	W 12	W 13 ; W 14 L	384	1262	566	3655	STD	16	TL	151 A8	163 A8		10 FR	6825
														25 FR	5800
														30 FR	5460
														40 FR	4875
														10 DW	4830
														25 DW	4105
														30 DW	3865
														40 DW	3450

														km/h - bar	2.40
	16.5/85 - 24	W 13	W 14 L ; W 15 L	415	1325	591	3837	STD	10	TL	146 A8	158 A8		10 FR	5950
														25 FR	5060
														30 FR	4760
														40 FR	4250
														10 DW	4200
														25 DW	3570
														30 DW	3360
														40 DW	3000

STD: Standard - SPL: Special

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

AS 504

∅ 24"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	2.80
	16.5/85 - 24	W 13	W 14 L ; W 15 L	415	1325	591	3837	STD	12	TL	151 A8	163 A8		10 FR	6825
														25 FR	5800
														30 FR	5460
														40 FR	4875
														10 DW	4830
														25 DW	4105
														30 DW	3865
														40 DW	3450
														km/h - bar	3.80
	16.5/85 - 24	W 13	W 14 L ; W 15 L	415	1325	591	3837	STD	16	TT	155 A8	168 A8		10 FR	7840
														25 FR	6665
														30 FR	6270
														40 FR	5600
														10 DW	5425
														25 DW	4610
														30 DW	4340
														40 DW	3875
														km/h - bar	3.80
	16.5/85 - 24	W 13	W 14 L ; W 15 L	415	1325	591	3837	STD	16	TL	155 A8	168 A8		10 FR	7840
														25 FR	6665
														30 FR	6270
														40 FR	5600
														10 DW	5425
														25 DW	4610
														30 DW	4340
														40 DW	3875
														km/h - bar	3.80
	400/80 - 24	W 13	W 12 ; W 14 L	394	1262	566	3655	IND	-	TL	156 A8			10	5000
														25	4240
														30	4160
														40	4000
														km/h - bar	5.00
	400/80 - 24	W 13	W 12 ; W 14 L	394	1262	566	3655	IND	-	TL	162 A8			10	5940
														25	5035
														30	4940
														40	4750

STD: Standard - IND: Industrial

Technologies

- Aramid Belted
- Heavy Duty
- Reinforced Carcass

Performance

- Durability
- Self-Cleaning
- Traction
- Stability
- Cut and Chip Resistance

IMPLEMENT

Bias



AS 505

AS 505 is best suited for soil tillage operations with small tractors and implement machinery. It features excellent self-cleaning properties and increased traction on the ground, especially on muddy soil.

∅ 15"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.60
	6.5/80 - 15	5.0	4½ K ; 5 K ; 5 J	169	683	325	2106	STD	6	TL	86 A8	98 A8		10 FR	1050
														25 FR	895
														30 FR	840
														40 FR	750
														10 DW	740
														25 DW	630
														30 DW	595
														40 DW	530

														km/h - bar	4.80
	6.5/80 - 15	5.0	4½ K ; 5 K ; 5 J	169	683	325	2106	STD	8	TL	92 A8	104 A8		10 FR	1260
														25 FR	1070
														30 FR	1010
														40 FR	900
														10 DW	880
														25 DW	750
														30 DW	705
														40 DW	630

STD: Standard

Performance

Durability

Traction

Self-Cleaning



Bias



AS 507

AS 507 is a field-oriented tire suitable for soil tillage with implement machinery. It features excellent self-cleaning properties and increased traction on the ground. The AS 507 "special" version offers even higher cut and chip resistance to face the most difficult operating conditions.

∅ 15"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	2.80
	185/65 - 15	5.5	-	185	640	301	1894	STD	4	TL	76 A8	89 A8		10 FR	810
														25 FR	690
														30 FR	650
														40 FR	580
														10 DW	560
														25 DW	475
														30 DW	450
														40 DW	400

STD: Standard

Performance

Durability

Traction

Self-Cleaning

IMPLEMENT

Bias



AS 509

AS 509 has been specially designed for trailers, seeders and soil preparation machinery. Its tread pattern with a huge number of lugs provides a uniform weight distribution on the land. AS 509 ensures high load capacity at low inflation pressure, thus minimizing soil compaction and protecting crops.

∅ 22.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.00	3.50	4.00
	550/45 - 22.5	AG 16.00	-	540	1065	479	3250	STD	20	TL	154 A8/150 B	166 A8/162 B		10 FR	6270	6860	7420
														20 FR	5645	6175	6680
														30 FR	5020	5490	5915
														40 FR	4480	4900	5300
														50 FR	4030	4410	4750
														10 DW	4440	4860	5250
														20 DW	3995	4370	4725
														30 DW	3550	3885	4200
														40 DW	3170	3470	3750
														50 DW	2855	3125	3350

STD: Standard

Performance

Durability

High Load Capacity

Traction

Self-Cleaning

Bias



FARM 2000

The FARM 2000 tire is suitable on tractors for soil tillage and transport applications. It is the ideal tire for heavy-duty use and in all operating conditions where good traction is required.

∅ 15.3"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	3.60
	260/70 - 15.3	9.00	-	265	775	349	2294	STD	-	TL	114 A8	126 A8	10 FR	2380
													25 FR	2025
													30 FR	1905
													40 FR	1700
													10 DW	1650
													25 DW	1405
													30 DW	1320
													40 DW	1180

													Load capacity (kg/tire) km/h - bar	2.80
	300/80 - 15.3	9.00	-	300	890	388	2608	STD	-	TL	120 A8	132 A8	10 FR	2800
													25 FR	2380
													30 FR	2240
													40 FR	2000
													10 DW	1960
													25 DW	1665
													30 DW	1570
													40 DW	1400

∅ 16"														
	250/80 - 16	W 8	W 7 ; W 9 ; W 8 L	240	820	369	2429	STD	-	TT	113 A8	125 A8	km/h - bar	2.80
													10 FR	2310
													25 FR	1965
													30 FR	1850
													40 FR	1650
													10 DW	1610
													25 DW	1370
													30 DW	1290
													40 DW	1150

	250/80 - 16	W 8	W 7 ; W 9 ; W 8 L	240	820	369	2429	STD	-	TL	113 A8	125 A8	km/h - bar	2.80
													10 FR	2310
													25 FR	1965
													30 FR	1850
													40 FR	1650
													10 DW	1610
													25 DW	1370
													30 DW	1290
													40 DW	1150

STD: Standard

Technologies

Reinforced Carcass

Special Compound

Performance

Durability

Traction

Cut and Chip Resistance

Self-Cleaning

High Load Capacity

FARM 2000 (R-1)

∅ 18"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	1.90
	8 - 18	W 6	-	195	840	390	2470	STD	6	TT	-	-		30	670

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	2.80
250/80 - 18	W 8	W7 ; W9	240	870	394	2679	STD	-	TT	115 A8	127 A8		10 FR	2450
													25 FR	2085
													30 FR	1960
													40 FR	1750
													10 DW	1700
													25 DW	1445
													30 DW	1360
													40 DW	1215

Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	2.80
250/80 - 18	W 8	W7 ; W9	240	870	394	2679	STD	-	TL	115 A8	127 A8		10 FR	2450
													25 FR	2085
													30 FR	1960
													40 FR	1750
													10 DW	1700
													25 DW	1445
													30 DW	1360
													40 DW	1215

STD: Standard

Technologies

- Reinforced Carcass
- Special Compound

Performance

- Durability
- Traction
- Cut and Chip Resistance
- Self-Cleaning
- High Load Capacity



Bias



TR 882

TR 882 is a very versatile tire suitable for several applications and vehicles. Designed to fit implement machinery and hay harvesters/balers, its usage is not only limited to soil tillage and hay harvesting operations. BKT has developed a specific TR 882 version to use the tire in forestry applications with trailers. TR 882 is also available as "aramid-belted", "HD" and "special" versions to meet specific end user requirements.

∅ 15.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	Load capacity (kg/tire) km/h - bar	2.40
	400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	8	TL	122 A8	134 A8	**10 FR**	2970
													25 FR	2525
													30 FR	2375
													40 FR	2120
													10 DW	2100
													25 DW	1785
													30 DW	1680
													40 DW	1500

	400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	14	TL	132 A8	145 A8	**km/h - bar**	**3.60**
													10 FR	4060
													25 FR	3450
													30 FR	3250
													40 FR	2900
													10 DW	2800
													25 DW	2380
													30 DW	2240
													40 DW	2000

	400/60 - 15.5	AG 13.00	-	400	875	380	2564	AB	14	TL	132 A8	145 A8	**km/h - bar**	**3.60**
													10 FR	4060
													25 FR	3450
													30 FR	3250
													40 FR	2900
													10 DW	2800
													25 DW	2380
													30 DW	2240
													40 DW	2000

	400/60 - 15.5	AG 13.00	-	400	875	380	2564	HD	14	TL	132 A8	145 A8	**km/h - bar**	**3.60**
													10 FR	4060
													25 FR	3450
													30 FR	3250
													40 FR	2900
													10 DW	2800
													25 DW	2380
													30 DW	2240
													40 DW	2000

STD: Standard - AB: Aramid Belted - HD: Heavy Duty

Technologies

- Special Compound
- Aramid Belted
- Heavy Duty

Performance

- Cut and Chip Resistance
- Stubble Resistance
- Durability
- Traction

TR 882

∅ 15.5”	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	3.60
	400/60 - 15.5	AG 13.00	-	400	875	380	2564	SPL	14	TL	132 A8	145 A8		10 FR	4060
														25 FR	3450
														30 FR	3250
														40 FR	2900
														10 DW	2800
														25 DW	2380
														30 DW	2240
														40 DW	2000
	400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	18	TL	137 A8	149 A8		km/h - bar	4.50
														10 FR	4550
														25 FR	3870
														30 FR	3640
														40 FR	3250
														10 DW	3220
														25 DW	2735
														30 DW	2575
														40 DW	2300
	400/60 - 15.5	AG 13.00	-	400	875	380	2564	AB	18	TL	137 A8	149 A8		km/h - bar	4.50
														10 FR	4550
														25 FR	3870
														30 FR	3640
														40 FR	3250
														10 DW	3220
														25 DW	2735
														30 DW	2575
														40 DW	2300
	400/60 - 15.5	AG 13.00	-	400	875	380	2564	HD	18	TL	137 A8	149 A8		km/h - bar	4.50
														10 FR	4550
														25 FR	3870
														30 FR	3640
														40 FR	3250
														10 DW	3220
														25 DW	2735
														30 DW	2575
														40 DW	2300
	400/60 - 15.5	AG 13.00	-	400	875	380	2564	SPL	18	TL	137 A8	149 A8		km/h - bar	4.50
														10 FR	4550
														25 FR	3870
														30 FR	3640
														40 FR	3250
														10 DW	3220
														25 DW	2735
														30 DW	2575
														40 DW	2300

STD: Standard - AB: Aramid Belted - HD: Heavy Duty - SPL: Special

Technologies

Special Compound

Aramid Belted

Heavy Duty

Performance

Cut and Chip Resistance

Stubble Resistance

Durability

Traction

IMPLEMENT

Bias



SL 441

SL 441 is a free rolling tire developed for soil tillage operations with trailers and implement machinery. SL 441 has been engineered to provide best handling to drivers.

∅ 14.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	5.00
	200/60 - 14.5	6.75	4.50 E ; 5.50 F	210	610	278	1785	STD	10	TT	106 A8		10 FR	1330
													25 FR	1130
													30 FR	1065
													40 FR	950
	200/60 - 14.5	6.75	4.50 E ; 5.50 F	210	610	278	1785	STD	14	TT	113 A8		km/h - bar	7.00
													10 FR	1610
													25 FR	1370
													30 FR	1290
													40 FR	1150
	200/60 - 14.5	6.75	4.50 E ; 5.50 F	210	610	278	1785	STD	14	TL	113 A8		km/h - bar	7.00
													10 FR	1610
													25 FR	1370
													30 FR	1290
													40 FR	1150

Performance

Durability

High Load Capacity

STD: Standard

IMPLEMENT

Radial



AS 511

AS 511 is best suited for grassland operations with implement machinery. The robust casing and the special cut-resistant tread compound ensure extraordinary stability plus enhanced performance. Thanks to its large contact area, AS 511 ensures excellent traction and minimizes soil compaction.

∅ 15"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version		Load capacity (kg/tire) km/h - bar	2.8
	31 X 15.50 R 15	122 D	13 LB	-	388	785	353	2387	-	STD		50	1500

Performance

Cut and Chip Resistance

Reduced Soil Compaction

Stability

Traction

STD: Standard

IMPLEMENT

Radial



AW 712

AW 712 is an implement radial tire that is particularly suitable for slurry tank trucks and trailers. It features a strong casing in addition to a stubble-resistant compound to ensure great durability. AW 712 provides also excellent driving comfort.

∅ 15.3"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version		Load capacity (kg/tire) km/h - bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	6.0
	260/70 R 15.3	134 A8/B	9.00	-	264	760	344	2304	-	IMP		**50**	615	785	955	1105	1275	1445	1550	1720	1780	1995	2120
												40	615	785	955	1105	1275	1445	1550	1720	1780	1995	2120
												30	690	880	1070	1235	1425	1615	1735	1925	1990	2235	2375
												25	735	935	1140	1315	1515	1720	1845	2050	2115	2375	2525
												20	780	990	1205	1375	1605	1820	1955	2170	2240	2515	2675
												10	865	1100	1340	1545	1785	2020	2170	2410	2490	2795	2970

STD: Standard

Performance

Stubble Resistance

Durability

Comfort

IMPLEMENT

Bias



PL 846

PL 846 has been specially designed for implement machinery in soil tillage applications. It features excellent stability and outstanding traction as well as high cut and chip resistance. PL 846 is the ideal tire on rocky surfaces.

∅ 9"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	8.50
	6.00 - 9	4.00 E	-	160	540	-	-	STD	10	TT	-		**25**	1320

	6.00 - 9	4.00 E	-	160	540	-	-	STD	12	TT	-		km/h - bar	**10.00**
													25	1450

STD: Standard

Performance

Cut and Chip Resistance

Durability

Traction

IMPLEMENT

Radial



RM 500

RM 500 is a steel-belted radial tire suitable for harvester implement applications. It features a strong casing and a special tread design providing high load capacity and particular cut-and-chip resistance. Thanks to its large footprint, RM 500 ensures great pressure distribution on the ground with reduced soil compaction in addition to excellent traction.

∅ 24"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	Type	LI/SS Drive Wheel	LI/SS Free Rolling
	500/70 R 24	W 16 L	W 15 L	502	1310	572	3907	SB	TL	155 A8	167 A8
	500/85 R 24	W 16 L	W 15 L	520	1460	622	4382	SB	TL	170 A8	182 A8
∅ 28"	500/80 R 28	W 16 L	W 15 L	503	1495	635	4355	SB	TL	164 A8	176 A8
	600/65 R 28	W 18 L	W 16 L	590	1486	640	4340	SB	TL	156 A8	168 A8

Load capacity (kg/tire)

km/h - bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8
40 Free Rolling	2290	2620	2945	3600	4145	4800	5450
40 Drive Wheel	1630	1860	2095	2560	3945	3410	3875

km/h - bar	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
40 Free Rolling	3570	4335	5015	5780	6545	7055	7735	8500
40 Drive Wheel	2520	3060	3540	4080	4620	4980	5460	6000

km/h - bar	-
-	-

km/h - bar	0.8	1.0	1.2	1.6	2.0
40 Free Rolling	3080	3530	3980	4820	5600
40 Drive Wheel	2200	2520	2840	3440	4000

SB: Steel Belted

Technologies


High Puncture Resistance

Performance

High Load Capacity

Stability

Traction

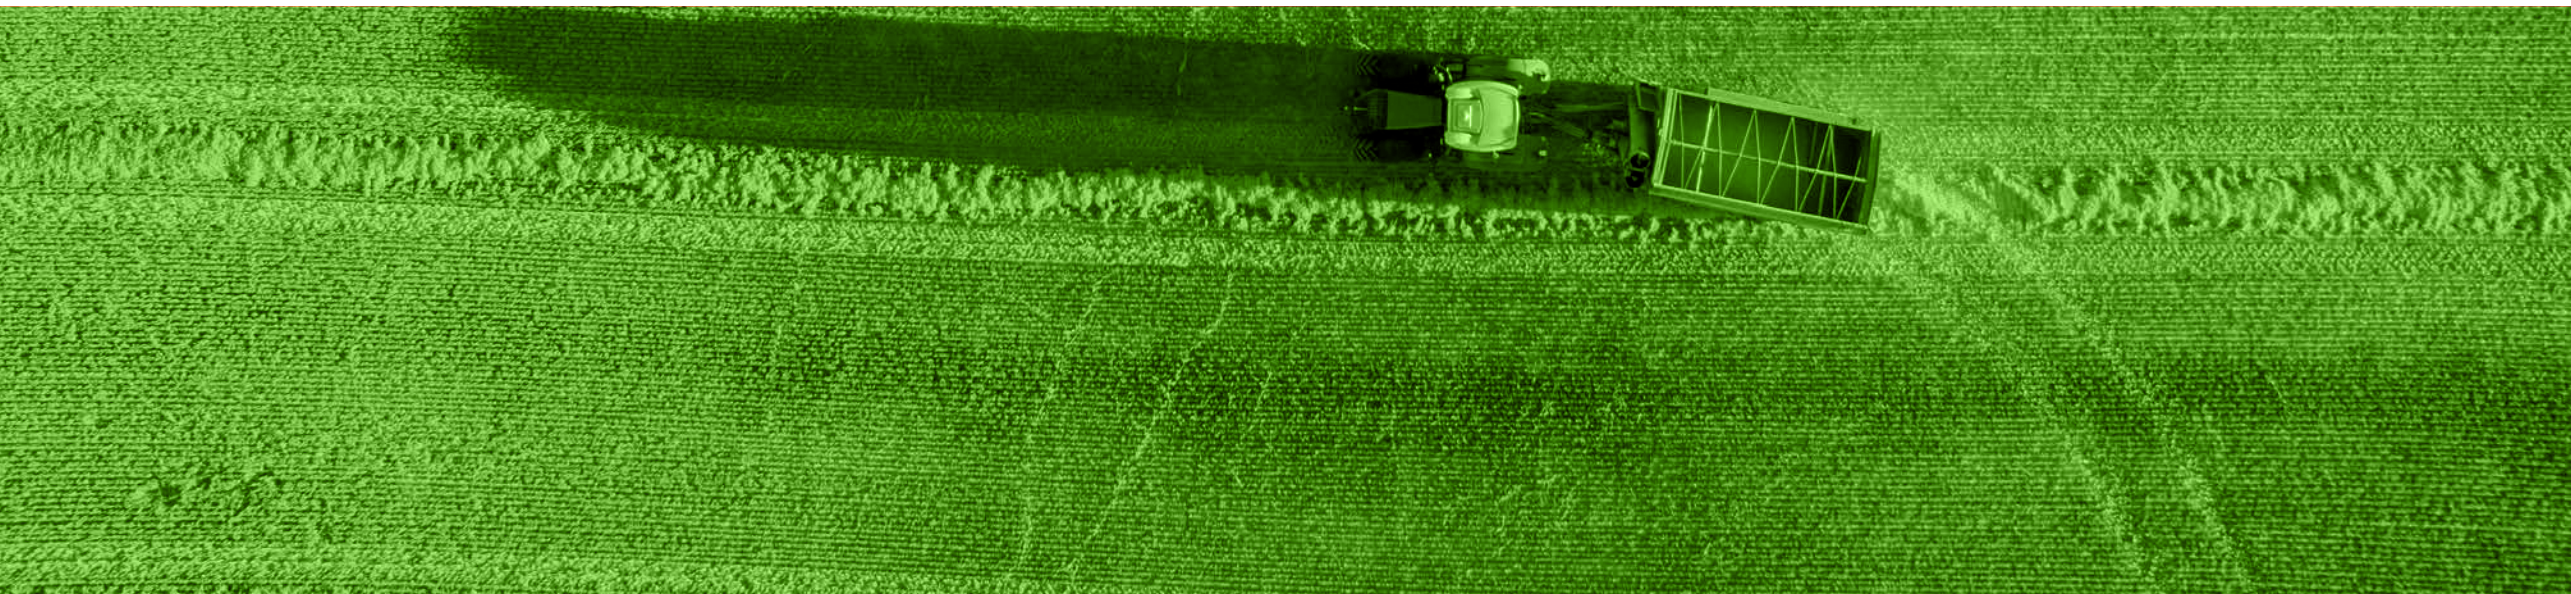

IMPLEMENT

Radial



SR 713

SR 713 is an All Steel radial tire with VF technology for farming implements. The tire features a strong multi-ply steel-belted casing and a multi-rib tread pattern ensuring low rolling resistance and a uniform tread wear. Thanks to its large footprint, this VF tire provides reduced soil compaction. SR 713 excels in both performance and reliability offering excellent speed levels even on the road.

∅ 22.5"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version		Load capacity (kg/tire) km/h - bar	4.4
	VF 295/75 R 22.5	151 D	9.00	8.25	280	1020	449	3044	360	STD		65	3450
	VF 445/65 R 22.5	169 D	13.00	14.00	440	1160	533	3515	390	STD		km/h - bar	4.40
												65	5800

STD: Standard


Technologies

All Steel

VF Technology

Performance

Field Protection

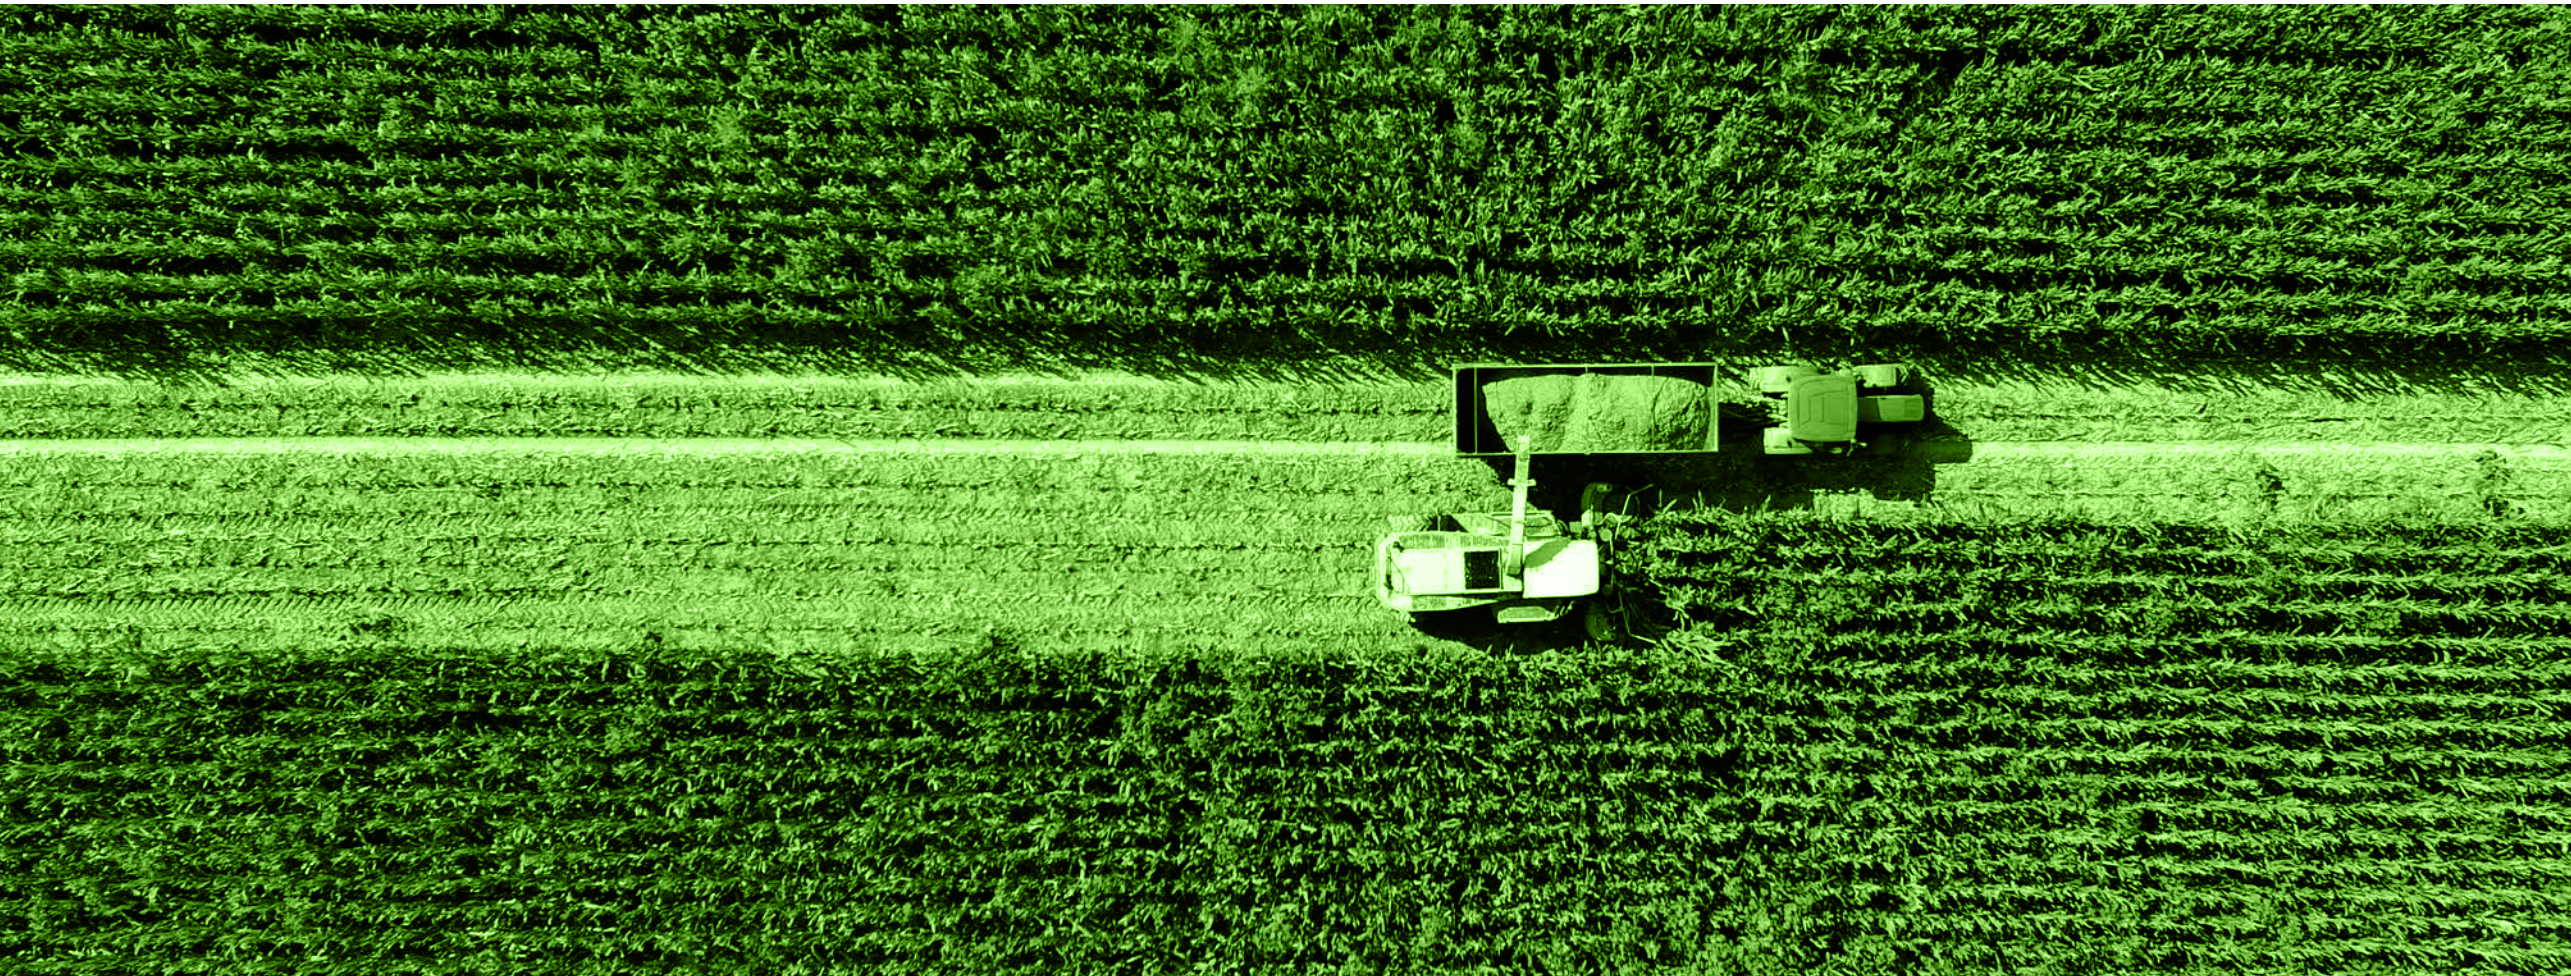

LAWN & GARDEN



LAWN & GARDEN

Bias



TR 360

TR 360 is suitable for implement machinery in on-and-off-the-road transport as well as lawn and garden applications. The particular tread design along with the casing structure ensures a long tire life-cycle.

∅ 8"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 3.10
	18 X 7 - 8	5.5	-	180	460	202	1334	STD	6	TL	-		15	450

Performance

Durability

STD: Standard

LAWN & GARDEN

Bias



LG SMOOTH

LG SMOOTH is a lawn and garden tire suitable for mowers. While the tire is gentle on the ground, the enhanced design ensures increased durability and eases handling. LG SMOOTH is available in an "aramid-belted" version for users who need strengthened puncture resistance.

∅ 10"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire)
	18 X 10.50 - 10	8.5 I - 55 ; I - 70 ; I - 90	8½ JA	254	460	207	1334	STD	2	TL	-		15	334
	20 X 10.00 - 10	8.00 I - 55	7.00 I - 55 ; I - 70 ; I - 90	245	500	223	1450	STD	2	TL	-		km/h - bar	0.70
													15	335
	20 X 10.00 - 10	8.00 I - 55	7.00 I - 55 ; I - 70 ; I - 90	245	500	223	1450	STD	4	TL	-		km/h - bar	1.50
													15	530
	20 X 10.00 - 10	8.00 I - 55	7.00 I - 55 ; I - 70 ; I - 90	245	500	223	1450	AB	6	TL	-		km/h - bar	2.20
													15	660
	20 X 10.00 - 10	8.00 I - 55	7.00 I - 55 ; I - 70 ; I - 90	245	500	223	1450	STD	6	TL	-		km/h - bar	2.20
													15	660

Technologies

Aramid Belted

Performance

Field Protection

High Puncture Resistance

STD: Standard - AB: Aramid Belted

Bias



LG 306

LG 306 is a lawn and garden tire suitable for mowers. In some sizes, LG 306 is also fit for small tractors. The specific tread pattern makes the tire gentle on the ground, easing handling at the same time. LG 306 is available in an "aramid-belted" version for users who need strengthened puncture resistance.

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 3.20
∅ 5"	11 X 4.00 - 5	3.00 A	-	104	272	120	789	STD	4	TL	-		15	150
∅ 6"	13 X 5.00 - 6	3.50 A	-	127	325	144	943	STD	4	TL	-		km/h - bar	2.80
													15	200
	13 X 5.00 - 6	3.50 A	-	127	325	144	943	STD	6	TL	-		km/h - bar	4.20
													15	255
	15 X 6.00 - 6	4.50 A	-	152	365	159	1059	STD	4	TL	-		km/h - bar	2.10
													15	257
	15 X 6.00 - 6	4.50 A	-	152	365	159	1059	STD	6	TL	-		km/h - bar	3.20
													15	335
∅ 8"	16 X 6.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	170	408	182	1183	STD	4	TL	-		km/h - bar	1.90
													15	280
	16 X 6.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	170	408	182	1183	STD	6	TL	-		km/h - bar	2.90
													15	355
	16 X 6.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	170	408	182	1183	AB	6	TL	-		km/h - bar	2.90
													15	355
	16 X 6.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	170	408	182	1183	STD	8	TL	-		km/h - bar	3.70
													15	400
	18 X 8.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	184	410	-	-	AB	4	TL	-		km/h - bar	-
													-	-

STD: Standard - AB: Aramid Belted

Technologies

Aramid Belted

Performance

Field Protection

Comfort

High Puncture Resistance

LG 306

∅	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	1.50
∅ 8"	18 X 8.50 - 8	7.00 I - 55 ; I - 70 ; I - 90	-	215	450	204	1346	STD	4	TL	-		15	375
	18 X 8.50 - 8	7.00 I - 55 ; I - 70 ; I - 90	-	215	450	204	1346	STD	6	TL	-		km/h - bar	2.30
													15	475
	18 X 8.50 - 8	7.00 I - 55 ; I - 70 ; I - 90	-	215	450	204	1346	AB	6	TL	-		km/h - bar	2.30
													15	475
	18 X 9.50 - 8	7.00 I - 55 ; I - 70 ; I - 90	-	230	470	206	1363	STD	4	TL	-		km/h - bar	1.40
													15	425
	18 X 9.50 - 8	7.00 I - 55 ; I - 70 ; I - 90	-	230	470	206	1363	STD	6	TL	-		km/h - bar	2.50
													15	605
	18 X 9.50 - 8	7.00 I - 55 ; I - 70 ; I - 90	-	230	470	206	1363	AB	6	TL	-		km/h - bar	2.50
													15	605
	20 X 10.00 - 8	8.00 I - 55	7.00 I - 55 ; I - 70 ; I - 90	254	508	221	1473	STD	4	TL	-		km/h - bar	1.50
													15	545
	20 X 10.00 - 8	8.00 I - 55	7.00 I - 55 ; I - 70 ; I - 90	254	508	221	1473	STD	6	TL	-		km/h - bar	2.20
													15	670
	20 X 10.00 - 8	8.00 I - 55	7.00 I - 55 ; I - 70 ; I - 90	254	508	221	1473	AB	6	TL	-		km/h - bar	2.20
													15	670
∅ 10"	18 X 8.50 - 10	7.00 I - 55 ; I - 70 ; I - 90	-	210	460	209	1340	STD	4	TL	-		km/h - bar	1.50
													15	361
	20 X 8.00 - 10	6.00 I - 55 ; I - 70 ; I - 90	6 JA	205	500	223	1450	STD	4	TL	-		km/h - bar	1.70
													15	412
	20 X 8.00 - 10	6.00 I - 55 ; I - 70 ; I - 90	6 JA	205	500	223	1450	STD	6	TL	-		km/h - bar	2.50
													15	510
	20 X 10.00 - 10	8.00 I - 55	7.00 I - 55	250	508	226	1473	STD	4	TL	-		km/h - bar	1.50
													15	530

STD: Standard - AB: Aramid Belted

Technologies

Aramid Belted

Performance

Field Protection

Comfort

High Puncture Resistance

LG 306

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.20
∅ 10"	20 X 10.00 - 10	8.00 I - 55	7.00 I - 55	250	508	226	1473	STD	6	TL	-		15	660
	20 X 10.00 - 10	8.00 I - 55	7.00 I - 55	250	508	226	1473	AB	6	TL	-		km/h - bar	2.20
													15	660
∅ 12"	23 X 8.50 - 12	7.00 I - 55 ; I - 70 ; I - 90	7 JA	210	575	258	1709	STD	4	TL	-		km/h - bar	1.50
													15	500
	23 X 8.50 - 12	7.00 I - 55 ; I - 70 ; I - 90	7 JA	210	575	258	1709	STD	6	TL	-		km/h - bar	2.30
													15	650
	23 X 8.50 - 12	7.00 I - 55 ; I - 70 ; I - 90	7 JA	210	575	258	1709	AB	6	TL	-		km/h - bar	2.30
													15	650
	23 X 8.50 - 12	7.00 I - 55 ; I - 70 ; I - 90	7 JA	210	575	258	1709	STD	8	TL	-		km/h - bar	3.00
													15	765
	23 X 8.50 - 12	7.00 I - 55 ; I - 70 ; I - 90	7 JA	210	575	258	1709	STD	12	TL	-		km/h - bar	4.50
													15	960
	23 X 10.50 - 12	8.5 I - 55	7.00 I - 55 ; I - 70 ; I- 90	260	585	262	1697	STD	4	TL	-		km/h - bar	1.40
													15	600
	23 X 10.50 - 12	8.5 I - 55	7.00 I - 55 ; I - 70 ; I - 90	260	585	262	1697	STD	6	TL	-		km/h - bar	2.20
													15	800
	23 X 10.50 - 12	8.5 I - 55	7.00 I - 55 ; I - 70 ; I - 90	260	585	262	1697	AB	6	TL	-		km/h - bar	2.20
													15	800
	23 X 10.50 - 12	8.5 I - 55	7.00 I - 55 ; I - 70 ; I - 90	260	585	262	1697	STD	8	TL	-		km/h - bar	3.00
													15	955
	23 X 10.50 - 12	8.5 I - 55	7.00 I - 55 ; I - 70 ; I - 90	260	585	262	1697	STD	12	TL	-		km/h - bar	4.50
													15	1215

STD: Standard - AB: Aramid Belted

Technologies

Aramid Belted

Performance

Field Protection

Comfort

High Puncture Resistance

LG 306

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	1.40
∅ 12"	24 X 12.00 - 12	9.5 AT	9.0 AT ; 8.5 AT ; 8.0 AT	298	610	276	1774	STD	4	TL	-		15	775
	26 X 12.00 - 12	10.50 I - 55 ; I - 70 ; I - 90	10½ JA ; 8½ JA	310	640	283	1856	STD	4	TL	-		km/h - bar	1.40
													15	800
	26 X 12.00 - 12	10.50 I - 55 ; I - 70 ; I - 90	10½ JA ; 8½ JA	310	640	283	1856	AB	6	TL	-		km/h - bar	2.10
													15	1030
	26 X 12.00 - 12	10.50 I - 55 ; I - 70 ; I - 90	10½ JA ; 8½ JA	310	640	283	1856	STD	8	TL	-		km/h - bar	3.00
													15	1250
	26 X 12.00 - 12	10.50 I - 55 ; I - 70 ; I - 90	10½ JA ; 8½ JA	310	640	283	1856	AB	8	TL	-		km/h - bar	3.00
													15	1250
	26 X 12.00 - 12	10.50 I - 55 ; I - 70 ; I - 90	10½ JA ; 8½ JA	310	640	283	1856	STD	12	TL	-		km/h - bar	4.50
													15	1600
	26 X 12.00 - 12	10.50 I - 55 ; I - 70 ; I - 90	10½ JA ; 8½ JA	310	640	283	1856	STD	14	TL	-		km/h - bar	5.20
													15	1740
∅ 14"	24 X 8.50 - 14	7 JA	-	210	610	280	1769	STD	4	TL	-		km/h - bar	1.60
													15	550
	25 X 8.50 - 14	7.00 I - 55 ; I - 70 ; I - 90	-	220	638	286	1889	STD	6	TL	-		km/h - bar	2.20
													15	750
∅ 15"	27 X 8.50 - 15	7.00 JA	-	216	680	308	1970	STD	4	TL	-		km/h - bar	2.10
													50	560
	27 X 10.50 - 15	8.00 LB	-	272	705	318	2042	STD	4	TL	-		km/h - bar	2.10
													50	600
	27 X 10.50 - 15	8.00 LB	-	272	705	318	2042	STD	12	TL	-		km/h - bar	6.10
													50	1100
	29 X 12.50 - 15	10	-	318	740	-	-	AB	10	TL	-		km/h - bar	4.1
													50	1150

STD: Standard - AB: Aramid Belted

Technologies

Aramid Belted

Performance

Field Protection

Comfort

High Puncture Resistance

LG 306

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	1.40
∅ 15"	31 X 15.5 - 15	13 LB	-	391	792	350	2313	STD	4	TL	-		50	775
	31 X 15.5 - 15	13 LB	-	391	792	350	2313	AB	8	TL	-		km/h - bar	3.10
													50	1250
∅ 16"	13.6 - 16	W 12	W 11	388	975	439	2793	STD	4	TL	-		km/h - bar	1.00
													15	950
∅ 16.5"	33 X 15.50 - 16.5	12.00	-	396	840	374	2495	STD	10	TL	-		km/h - bar	2.10
													15	1630
∅ 20"	38 X 14.00 - 20	W 11	W 11 H	375	980	435	2894	STD	4	TL	-		km/h - bar	1.70
													50	1050
	44 X 18.00 - 20	W 14 L	W 14 LH	475	1180	518	3471	STD	4	TL	-		km/h - bar	1.40
													50	1500

STD: Standard - AB: Aramid Belted

Technologies

Aramid Belted

Performance

Field Protection

Comfort

High Puncture Resistance



LAWN & GARDEN

Bias



LG 307

LG 307 is a lawn and garden tire suitable for mowers. The specific tread pattern makes the tire gentle on the ground to prevent turf damages, easing handling at the same time.

∅	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	1.50
∅ 8"	20 X 10.00 - 8	8.00 I - 55 ; I - 70 ; I - 90	7.00 I - 55 ; I - 70 ; I - 90	255	495	215	1435	STD	4	TL	-		15	545
	20 X 10.00 - 8	8.00 I - 55 ; I - 70 ; I - 90	7.00 I - 55 ; I - 70 ; I - 90	255	495	215	1435	STD	6	TL	-		km/h - bar	2.20
													15	670
∅ 10"	20 X 12.00 - 10	8.5 I - 55 ; I - 70 ; I - 90	-	285	500	221	1435	STD	4	TL	-		km/h - bar	1.40
													15	600

Performance

Field Protection

Comfort

STD: Standard



Bias



LG 408

LG 408 is a lawn and garden tire suitable for mowers and small tractors. The specific tread pattern makes the tire gentle on the ground to prevent turf damages making handling easier at the same time. LG 408 is available in an "aramid-belted" version for users who need strengthened puncture resistance

∅ 12"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	1.40
	24 X 13.00 - 12	10.5 I - 55 ; I - 70 ; I - 90	-	320	605	269	1755	STD	4	TL	-		15	835
	24 X 13.00 - 12	10.5 I - 55 ; I - 70 ; I - 90	-	320	605	269	1755	STD	6	TL	-		km/h - bar	2.20
													15	1085
	24 X 13.00 - 12	10.5 I - 55 ; I - 70 ; I - 90	-	320	605	269	1755	AB	6	TL	-		km/h - bar	2.20
													15	1085
	26.5 X 14.00 - 12	12.00 I	-	380	665	293	1929	STD	4	TL	-		km/h - bar	1.30
													15	985
	26.5 X 14.00 - 12	12.00 I	-	380	665	293	1929	STD	6	TL	-		km/h - bar	2.00
													15	1280
	26.5 X 14.00 - 12	12.00 I	-	380	665	293	1929	AB	6	TL	-		km/h - bar	2.00
													15	1280
	26.5 X 14.00 - 12	12.00 I	-	380	665	293	1929	STD	10	TL	-		km/h - bar	3.40
													15	1750

STD: Standard - AB: Aramid Belted

Technologies

Aramid Belted

Performance

High Puncture Resistance

Field Protection

Comfort

Bias



LG RIB

LG RIB is a lawn and garden tire suitable for mowers and small tractors. Its tread pattern has been designed for making the tire gentle on the ground to prevent turf damages making handling easier at the same time. LG RIB is available in an "aramid-belted" version for users who need strengthened puncture resistance

∅	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.80
∅ 6"	13 X 5.00 - 6	3.50 A	-	127	325	144	943	STD	4	TL	-		15	200
	13 X 5.00 - 6	3.50 A	-	127	325	144	943	AB	6	TL	-		km/h - bar	4.20
													15	255
	15 X 6.00 - 6	4.50 A	-	152	365	159	1059	STD	4	TL	-		km/h - bar	2.10
													15	257
	15 X 6.00 - 6	4.50 A	-	152	365	159	1059	STD	6	TL	-		km/h - bar	3.20
													15	335
	15 X 6.00 - 6	4.50 A	-	152	365	159	1059	AB	6	TL	-		km/h - bar	3.20
													15	335
∅ 8"	16 X 6.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	170	408	182	1183	STD	4	TT	-		km/h - bar	1.90
													15	280
	16 X 6.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	170	408	182	1183	STD	4	TL	-		km/h - bar	1.90
													15	280
	16 X 6.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	170	408	182	1183	STD	6	TL	-		km/h - bar	2.90
													15	355
	16 X 6.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	170	408	182	1183	AB	6	TL	-		km/h - bar	2.90
													15	355
	16 X 6.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	170	408	182	1183	STD	8	TL	-		km/h - bar	3.70
													15	400

STD: Standard - AB: Aramid Belted

Technologies

Aramid Belted

Performance

High Puncture Resistance

Steering Control

Field Protection

Comfort

LG RIB

∅	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	4.90
∅ 8"	16 X 6.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	170	408	182	1183	STD	10	TL	-		15	480
	16 X 6.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	170	408	182	1183	AB	10	TL	-		km/h - bar	4.90
													15	480
∅ 10"	20 X 10.00 - 10	8.00 I - 55 ; I - 70 ; I - 90	7.00 I - 55 ; I - 70 ; I - 90	236	498	222	1444	STD	4	TL	-		km/h - bar	1.50
													15	530

STD: Standard - AB: Aramid Belted

Technologies

Aramid Belted

Performance

High Puncture Resistance

Steering Control

Field Protection

Comfort

LAWN & GARDEN

Radial



AGRIMAX TURF RT 333

AGRIMAX TURF RT 333 (R-3+) is a radial tire designed for small tractors in gardening, vineyards and orchards applications. Its rounded shoulder design provides low soil compaction and makes it extremely delicate on the ground. Its unique extra-deep tread (R-3+) and the special design with directional blocks stand for excellent traction both in the field and on the road, and an extended tire life cycle. AGRIMAX TURF RT 333 (R-3+) ensures great self-cleaning properties and thanks to its low rolling resistance, allows for significant fuel saving.

∅	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version		Load capacity (kg/tire) km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
∅ 16"	280/70 R 16	112 A8/112 B	W9	W 8 ; W 10	289	800	359	2371	390	STD		50	530	605	695	785	875	965	1055	1120
												40	530	605	695	785	875	965	1055	1120
												30	565	650	745	840	940	1035	1130	1200
												10 LT	710	815	935	1055	1175	1295	1415	1505
												10 HT	565	650	745	840	940	1035	1130	1200
∅ 18"	280/70 R 18	114 A8/114 B	W9	W 8 ; W 10	289	840	390	2550	410	STD		km/h - bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
												50	555	640	735	830	925	1015	1110	1180
												40	555	640	735	830	925	1015	1110	1180
												30	595	685	785	890	990	1090	1190	1265
												10 LT	745	860	985	1110	1240	1365	1490	1585
												10 HT	595	695	785	890	990	1090	1190	1265

STD: Standard

Technology

Extra Deep Tread

Block Pattern

Performance

Reduced Soil Compaction

Self-Cleaning

Durability

Traction

Low Rolling Resistance

LAWN & GARDEN

Bias



TRAC MASTER

TRAC MASTER is a soil tillage and lawn and garden tire, suitable for small tractors and implement machinery. Its tread design provides excellent field protection along with great traction in the fields and optimum self-cleaning properties.

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	3.20
∅ 12"	300/60 - 12	10.5	9.5	306	645	285	1885	STD	8	TL	-		50	1030
∅ 15"	31 X 15.50 - 15	13 LB	-	405	810	357	2365	STD	6	TL	-		km/h - bar	2.10
													50	975
	31 X 15.50 - 15	13 LB	-	405	810	357	2365	STD	8	TL	-		km/h - bar	3.10
													50	1250
	33 X 15.50 - 15	13 LB	-	404	865	378	2526	STD	6	TL	-		km/h - bar	2.10
													50	1370
	33 X 15.50 - 15	13 LB	-	404	865	378	2526	STD	8	TL	-		km/h - bar	3.10
													50	1620

STD: Standard

Performance

Traction

Field Protection

Self-Cleaning

LAWN & GARDEN

Bias



TR 313

TR 313 is a lawn and garden tire suitable for municipality and soil tillage operations with implement machinery, trenchers and orchard harvesters. The large contact area provides excellent grip. The TR 313 tire has been engineered to ensure a high level of stability also in critical operating conditions along with great self-cleaning properties

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	3.10
∅ 15"	31 X 15.50 - 15	13 LB	-	370	770	342	2233	STD	8	TL	-		50	1250

STD: Standard

Performance

Traction

Stability

Self-Cleaning

Bias



TR 315

TR 315 is suitable for lawn and garden, soil tillage and municipalities operations. It is ideal with implement machinery, trenchers and orchard harvesters. The TR 315 tire has a large contact area which provides excellent grip, great self-cleaning properties and outstanding stability in any condition

∅	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	1.90
∅ 8"	16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	155	408	182	1183	STD	4	TL	-		15	280
	16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	155	408	182	1183	STD	6	TL	-		km/h - bar	2.90
													15	355
∅ 12"	23 X 8.50 - 12	7 JA ; 7.00 I - 55 ; I - 70 ; I - 90		205	575	258	1668	STD	4	TL	-		km/h - bar	1.50
													15	500
	23 X 8.50 - 12	7 JA ; 7.00 I - 55 ; I - 70 ; I - 90		205	575	258	1668	STD	6	TL	-		km/h - bar	2.30
													15	650
	23 X 10.50 - 12	8½ JA	7 JA	255	590	260	1682	STD	4	TL	-		km/h - bar	1.40
													15	600
	23 X 10.50 - 12	8½ JA	7 JA	255	590	260	1682	STD	6	TL	-		km/h - bar	2.20
													15	800
	23 X 10.50 - 12	8½ JA	7 JA	255	590	260	1682	STD	8	TL	-		km/h - bar	3.00
													15	960
	23 X 10.50 - 12	8½ JA	7 JA	255	590	260	1682	STD	10	TL	-		km/h - bar	3.80
													15	1100
	26 X 12.00 - 12	10½ JA	8½ JA ; 9½ JA	308	655	289	1905	STD	4	TL	-		km/h - bar	1.40
													15	800
	26 X 12.00 - 12	10½ JA	8½ JA ; 9½ JA	308	655	289	1905	STD	8	TL	-		km/h - bar	3.00
													15	1250

STD: Standard

Performance

Traction

Stability

Self-Cleaning

TR 315

∅ 12"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	3.80
	26 X 12.00 - 12	10½ JA	8½ JA ; 9½ JA	308	655	289	1905	STD	10	TL	-		15	1450
	26 X 12.00 - 12	10½ JA	8½ JA ; 9½ JA	308	655	289	1905	SPL	10	TL	-		km/h - bar	3.80
													15	1450
	26 X 12.00 - 12	10½ JA	8½ JA ; 9½ JA	308	655	289	1905	STD	12	TL	-		km/h - bar	4.50
													15	1600
∅ 15"	31 X 15.50 - 15	13 LB	-	390	800	354	2320	STD	8	TL	-		km/h - bar	3.10
													50	1250
	31 X 15.50 - 15	13 LB	-	390	800	354	2320	STD	10	TL	-		km/h - bar	4.10
													50	1450
	31 X 15.50 - 15	10 LB	-	390	800	354	2320	STD	12	TL	-		km/h - bar	5.10
													50	1650

Performance

Traction

Stability

Self-Cleaning

STD: Standard - SPL: Special



Bias

TR 317



TR 317 is suitable for municipality and soil tillage operations with implement machinery, trenchers and orchard harvesters. The TR 317 tire has a large contact area which provides excellent grip and outstanding stability in any condition along with great self-cleaning properties.

∅ 8"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	1.50
	18 X 8.50 - 8	7.00 I - 55 ; I - 70 ; I - 90	-	215	450	198	1305	STD	4	TL	-		15	375
	18 X 8.50 - 8	7.00 I - 55 ; I - 70 ; I - 90	-	215	450	198	1305	HD	6	TL	-		km/h - bar	2.30
													15	475

STD: Standard - HD: Heavy Duty

Performance

Traction

Stability

Self-Cleaning

LAWN & GARDEN

Bias

TR 319



TR 319 is a tire for implement machinery, orchard harvesters and trenchers in lawn and garden, municipality and soil tillage applications. Featuring a large contact area providing best traction, TR 319 is very suitable for applications on wet surfaces, where stability and self-cleaning properties are required.

∅ 12"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	3.00
	26 X 12.00 - 12	10.50 AT	8.0 AT ; 8.5 AT ; 9.0 AT	318	640	-	-	STD	8	TL	116 A3		15	1250
∅ 15"	29 X 12.50 - 15	10 LB	-	312	755	360	2264	STD	6	TL	98 B		km/h - bar	2.10
													50	750
	29 X 12.50 - 15	10 LB	-	312	755	360	2264	STD	8	TL	106 B		km/h - bar	3.10
													50	950

STD: Standard

Performance

Traction

Stability

Self-Cleaning

GOLF



Bias



GF 304

GF 304 is suitable for golf applications with golf carts. GF 304 ensures best comfort and turf protection. GF 304 is also available as "aramid-belted" version to provide increased puncture resistance.

∅ 8"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	1.50
	18 X 8.50 - 8	7.00 I - 55 ; I - 70 ; I - 90	-	216	460	202	1334	STD	4	TL	-		15	375
	18 X 8.50 - 8	7.00 I - 55 ; I - 70 ; I - 90	-	216	460	202	1334	AB	4	TL	-		km/h - bar	1.50
													15	375
	18 X 8.50 - 8	7.00 I - 55 ; I - 70 ; I - 90	-	216	460	202	1334	STD	6	TL	-		km/h - bar	2.30
													15	475

Performance

Field Protection

STD: Standard - AB: Aramid Belted

Bias



GF 305 CLASSIC

GF 305 CLASSIC is a special tire mainly designed for golf carts. This tire is naturally gentle on the ground and protects the field from damages. GF 305 CLASSIC is a really comfortable tire which makes riding a pleasure.


∅ 10"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.20
	205/50 - 10	7.00 I - 55	6.00 I - 55 ; I -70 ; I - 90	215	470	211	1363	STD	4	TL	-		15	302
	205/50 - 10	7.00 I - 55	6.00 I - 55 ; I -70 ; I - 90	215	470	211	1363	STD	6	TL	-		km/h - bar	3.20
													15	460

Performance

Field Protection

STD: Standard

TRAILER

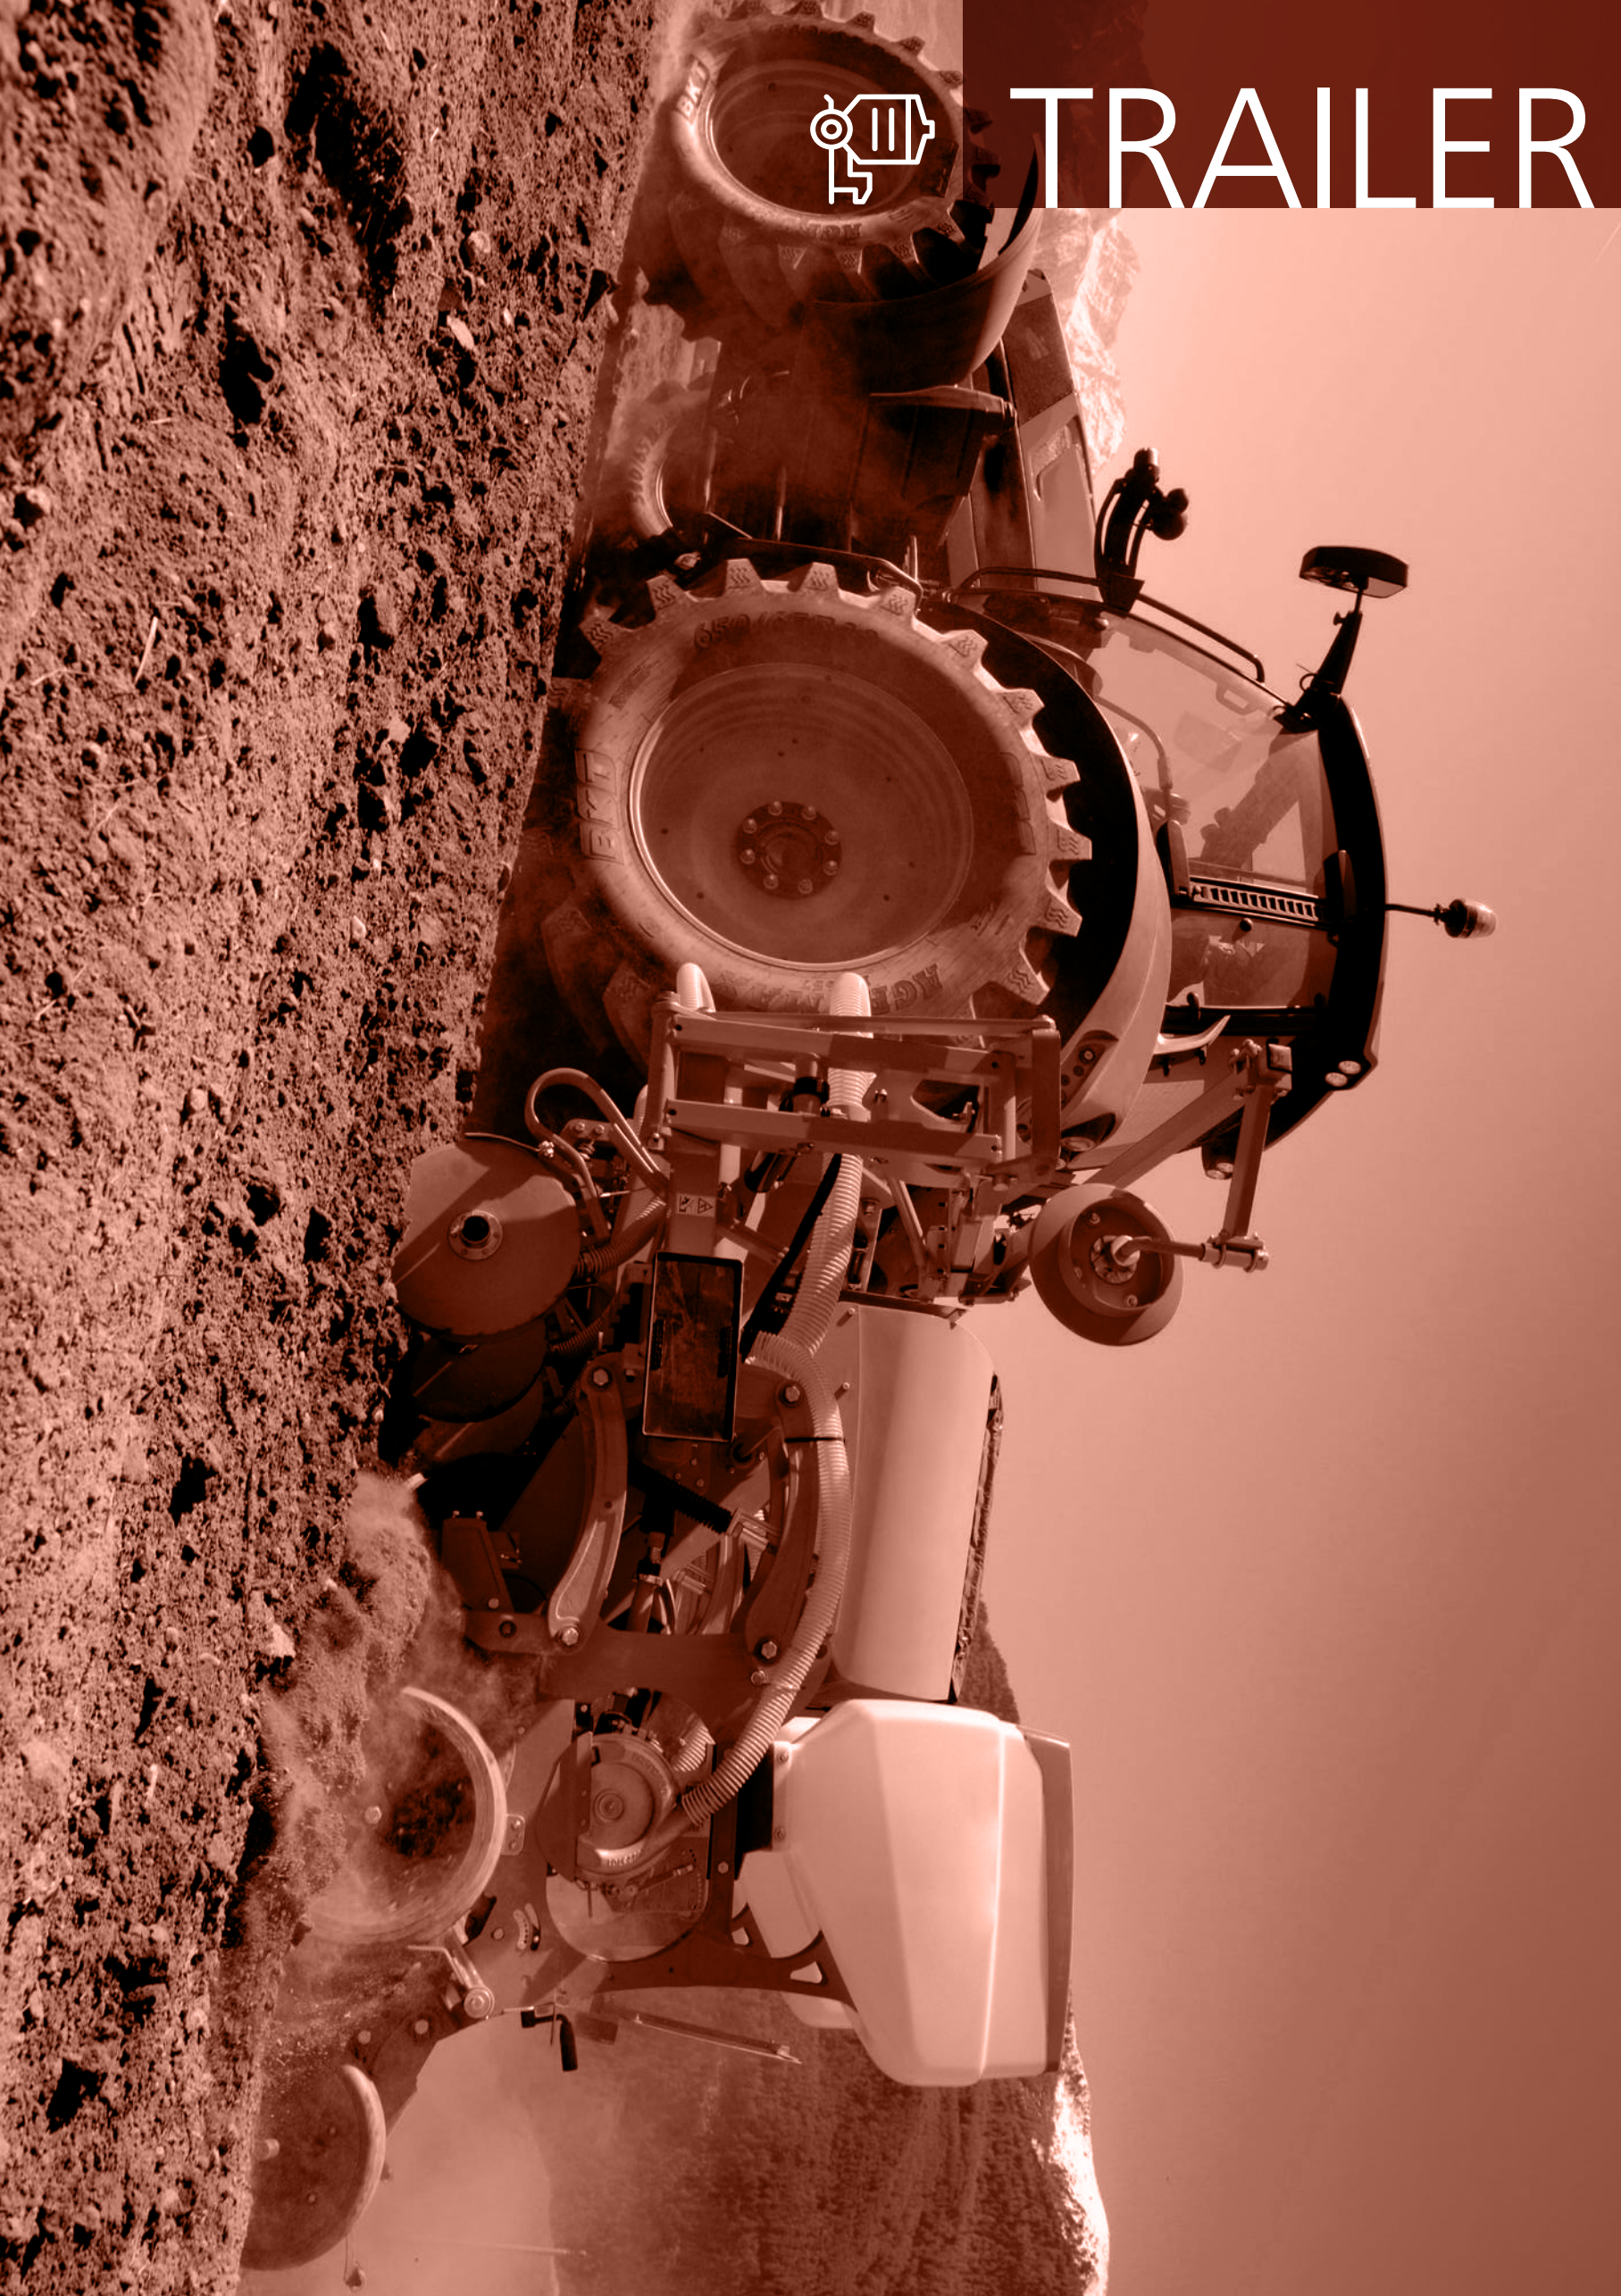

TRAILER

Bias



GF 305 FARM TRAILER

GF 305 FARM TRAILER has been designed for trailers in transport operations. This tire is particularly suitable for heavy-duty service and provides outstanding stability in any condition.

∅ 10"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar 40	Load capacity (kg/tire) 6.20
	205/65 - 10	6.00	-	212	520	223	1508	STD	10	TL	-		40	695

STD: Standard

Performance

Field Protection



Bias



INDUSTRIAL RIB F3

INDUSTRIAL RIB F3 is an agro-industrial rib-pattern tire designed for field and road transport as well as for soil tillage operations with implement machinery and trailers. This tire features outstanding cut and chip resistance making it suitable for the most critical operating conditions and ensuring a long tire life-cycle.

∅ 15"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	3.60
	11L - 15 SL	8 LB	10 LB	279	813	STD	10	TL		30	1185
										40	1060
	11L - 15 SL	8 LB	10 LB	279	813	SR	10	TL		km/h - bar	3.60
										30	1185
										40	1060
	11L - 15 SL	8 LB	10 LB	279	813	STD	12	TL		km/h - bar	4.20
										30	1290
										40	1160
	11L - 15 SL	8 LB	10 LB	279	813	SR	12	TL		km/h - bar	4.20
										30	1290
										40	1160
∅ 16"	11L - 16 SL	W 8 L	8 LB ; 10 LB ; W 10 L	279	830	STD	10	TL		km/h - bar	3.60
										30	1250
										40	1120
	11L - 16 SL	W 8 L	8 LB ; 10 LB ; W 10 L	279	830	SPL	10	TL		km/h - bar	3.60
										30	1250
										40	1120
	11L - 16 SL	W 8 L	8 LB ; 10 LB ; W 10 L	279	830	STD	12	TL		km/h - bar	4.40
										30	1385
										40	1250

STD: Standard - SR: Stubble Resistant - SPL: Special

Technologies

Special Compound

Performance

Durability

Stubble resistance

Bias



I - 1

I-1 has been designed for field and road transport as well as for soil tillage operations with implement machinery and trailers. I-1 is a high-speed tire that optimizes travel times so that you can focus on your core business. Thanks to its flotation capability, the I-1 tire reduces soil compaction in the field and avoids damages to your valuable crops.

∅ 14"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 3.00
	9.5L - 14 SL	7.00	8 KB	240	735	326	2154	STD	8	TT	-		65	1090
	9.5L - 14 SL	7.00	8 KB	240	735	326	2154	STD	8	TL	-		km/h - bar	3.00
													65	1090
	11L - 14 SL	8.00	8 KB	256	753	333	2206	STD	8	TL	-		km/h - bar	2.50
													65	1120
∅ 15"	6.70 - 15 SL	4½ KB	5 KB	172	710	319	2080	STD	6	TT	-		km/h - bar	3.00
													65	730
	6.70 - 15 SL	4½ KB	5 KB	172	710	319	2080	STD	6	TL	-		km/h - bar	3.00
													65	730
	6.70 - 15 SL	4½ KB	5 KB	172	710	319	2080	STD	8	TT	-		km/h - bar	3.90
													65	850
	7.60 - 15 SL	5.50	6 LB	193	734	328	2151	STD	6	TT	-		km/h - bar	2.80
													65	800
	7.60 - 15 SL	5.50	6 LB	193	734	328	2151	STD	8	TT	-		km/h - bar	3.60
													65	950
	7.60 - 15 SL	5.50	6 LB	193	734	328	2151	STD	8	TL	-		km/h - bar	3.60
													65	950

STD: Standard

Technologies

High Speed

Performance

Durability

Stubble resistance

∅ 15"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	4.30
	7.60 - 15 SL	5.50	6 LB	193	734	328	2151	STD	10	TT	-		65	1050
	7.60 - 15 SL	5.50	6 LB	193	734	328	2151	STD	10	TL	-		km/h - bar	4.30
													65	1050
	9.5L - 15 SL	7.00	8 LB	241	765	340	2242	STD	6	TT	-		km/h - bar	2.20
													65	925
	9.5L - 15 SL	7.00	8 LB	241	765	340	2242	STD	8	TT	-		km/h - bar	3.00
													65	1120
	9.5L - 15 SL	7.00	8 LB	241	765	340	2242	STD	8	TL	-		km/h - bar	3.00
													65	1120
	9.5L - 15 SL	7.00	8 LB	241	765	340	2242	SR	8	TL	-		km/h - bar	3.00
													65	1120
	9.5L - 15 SL	7.00	8 LB	241	765	340	2242	STD	12	TL	-		km/h - bar	4.40
													65	1450
	9.5L - 15 SL	7.00	8 LB	241	765	340	2242	SR	12	TL	-		km/h - bar	4.40
													65	1450
	11L - 15 SL	8 LB	10 LB	270	770	342	2256	STD	8	TT	-		km/h - bar	2.50
													65	1150
	11L - 15 SL	8 LB	10 LB	270	770	342	2256	STD	8	TL	-		km/h - bar	2.50
													65	1150
	11L - 15 SL	8 LB	10 LB	270	770	342	2256	SR	8	TL	-		km/h - bar	2.50
													65	1150

STD: Standard - SR: Stubble Resistant

Technologies

High Speed

Performance

Durability

Stubble resistance

∅ 15"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	3.00
	11L - 15 SL	8 LB	10 LB	270	770	342	2256	STD	10	TT	-		65	1320
	11L - 15 SL	8 LB	10 LB	270	770	342	2256	STD	10	TL	-		km/h - bar	3.00
													65	1320
	11L - 15 SL	8 LB	10 LB	270	770	342	2256	STD	12	TL	-		km/h - bar	3.60
													65	1450
	11L - 15 SL	8 LB	10 LB	270	770	342	2256	SR	12	TL	-		km/h - bar	3.60
													65	1450
	12.5L - 15 SL	10 LB	-	310	820	362	2403	STD	8	TT	-		km/h - bar	2.50
													65	1360
	12.5L - 15 SL	10 LB	-	310	820	362	2403	STD	8	TL	-		km/h - bar	2.50
													65	1360
	12.5L - 15 SL	10 LB	-	310	820	362	2403	STD	10	TT	-		km/h - bar	3.00
													65	1550
	12.5L - 15 SL	10 LB	-	310	820	362	2403	STD	10	TL	-		km/h - bar	3.00
													65	1550
	12.5L - 15 SL	10 LB	-	310	820	362	2403	STD	12	TT	-		km/h - bar	3.60
													65	1750
	12.5L - 15 SL	10 LB	-	310	820	362	2403	STD	12	TL	-		km/h - bar	3.60
													65	1750
	12.5L - 15 SL	10 LB	-	310	820	362	2403	SR	12	TL	-		km/h - bar	3.60
													65	1750

STD: Standard - SR: Stubble Resistant

Technologies

High Speed

Performance

Durability

Stubble resistance

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 3.30
	7.50 - 16 SL	5.50 F	6 LB	205	785	350	2300	STD	8	TT	-		**65**	1060
	7.50 - 16 SL	5.50 F	6 LB	205	785	350	2300	SPL	8	TT	-		**km/h - bar**	**3.30**
													65	1060
	7.50 - 16 SL	5.50 F	6 LB	205	785	350	2300	STD	10	TT	-		**km/h - bar**	**4.10**
													65	1215
	7.50 - 16 SL	5.50 F	6 LB	205	785	350	2300	SPL	10	TT	-		**km/h - bar**	**4.10**
													65	1215
	9.00 - 16 SL	6 LB	8 LB ; W 8 L	234	845	374	2476	STD	10	TT	-		**km/h - bar**	**3.60**
													65	1500
	9.00 - 16 SL	6 LB	8 LB ; W 8 L	234	845	374	2476	STD	10	TL	-		**km/h - bar**	**3.60**
													65	1500
	11L - 16 SL	8 LB	10 LB ; W 8 L	270	795	355	2329	STD	8	TT	-		**km/h - bar**	**2.50**
													65	1215
	11L - 16 SL	8 LB	10 LB ; W 8 L	270	795	355	2329	STD	10	TT	-		**km/h - bar**	**3.00**
													65	1360
	11L - 16 SL	8 LB	10 LB ; W 8 L	270	795	355	2329	STD	12	TT	-		**km/h - bar**	**3.50**
													65	1490
	12.5L - 16 SL	10 LB	W 10 L	310	845	374	2476	STD	8	TT	-		**km/h - bar**	**2.50**
													65	1400
	12.5L - 16 SL	10 LB	W 10 L	310	845	374	2476	STD	10	TT	-		**km/h - bar**	**3.00**
													65	1600

STD: Standard - SPL: Special

Technologies

High Speed

Performance

Durability

Stubble resistance

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 3.60
	12.5L - 16 SL	10 LB	W 10 L	310	845	374	2476	STD	12	TT	-		65	1800
	12.5L - 16 SL	10 LB	W 10 L	310	845	374	2476	STD	12	TL	-		km/h - bar	3.60
													65	1800
	12.5L - 16 SL	10 LB	W 10 L	310	845	374	2476	SR	14	TL	-		km/h - bar	3.90
													65	1900
∅ 16.1"	14L - 16.1 SL	W 11 C	-	360	935	409	2740	STD	8	TL	-		km/h - bar	2.20
													65	1750
	14L - 16.1 SL	W 11 C	-	360	935	409	2740	STD	12	TL	-		km/h - bar	3.00
													65	2120
	16.5L - 16.1 SL	W 14 C	W 14 CH	435	1025	444	3003	STD	10	TL	-		km/h - bar	2.50
													50	2360
	16.5L - 16.1 SL	W 14 C	W 14 CH	435	1025	444	3003	STD	14	TL	-		km/h - bar	3.30
													50	2900
	19L - 16.1 SL	W 16 C	W 16 CH	490	1100	474	3223	STD	10	TL	-		km/h - bar	2.20
													50	2725
	19L - 16.1 SL	W 16 C	W 16 CH	490	1100	474	3223	STD	12	TL	-		km/h - bar	2.50
													50	3000
	19L - 16.1 SL	W 16 C	W 16 CH	490	1100	474	3223	STD	14	TL	-		km/h - bar	2.80
													50	3200
	21.5L - 16.1 SL	W 18 CH	W 16 CH	550	1130	485	3413	STD	8	TL	-		km/h - bar	1.70
													50	2725

Technologies

High Speed

Performance

Durability

Stubble resistance

STD: Standard -SR: Stubble Resistant

∅ 16.1"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Free Rolling		Load capacity (kg/tire) km/h - bar	2.50
	21.5L - 16.1 SL	W 18 CH	W 16 CH	550	1130	485	3413	STD	14	TL	-		50	3550
	21.5L - 16.1 SL	W 18 CH	W 16 CH	550	1130	485	3413	STD	18	TL	-		km/h - bar	3.00
													50	4000
∅ 18"	10.5/80 - 18	W 9	W 8 ; 9	280	890	417	2679	STD	12	TT	135 A8		km/h - bar	4.40
													10 FR	3050
													25 FR	2595
													30 FR	2440
													40 FR	2180
∅ 24"	9.00 - 24 SL	W 8 H	-	272	1094	-	-	STD	8	TL	-		km/h - bar	2.80
													50	1600
	11.25 - 24 SL	W 10 H	W 10 ; W 8	325	1171	-	-	STD	8	TL	-		km/h - bar	2.20
													50	1850

STD: Standard

Technologies

High Speed

Performance

Durability

Stubble resistance



TRAILER

Bias



AGRI GRIP

AGRI GRIP is a tire for transport operations and particularly suitable for sugarcane trailers. AGRI GRIP has a strong casing providing high load capacity and particular cut-and-chip resistance. Its tread pattern has been designed for a longer service life.

∅ 26"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 2.60
	23.1 - 26	DW 20 B	-	595	1560	708	4658	DB	18	TL	-		**30 FR LLV**	5600

DB: Dual Bead

Technologies

Special Compound

Performance

Cut and Chip Resistance

Durability

High Load Capacity



TRAILER

Bias



FARM HIGHWAY TOUGH

FARM HIGHWAY TOUGH is a high-speed tire designed for transport applications with trailers. It provides high load capacity to improve your productivity and ensures a long tire life-cycle.

∅ 15"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	4.10
	9.5L - 15 FI	7.00	8 LB	245	766	343	2183	STD	8	TL	-		100	1215
	9.5L - 15 FI	7.00	8 LB	245	766	343	2183	STD	12	TL	-		km/h - bar	6.20
													100	1550
	10.00 - 15 FI	8 LB	-	274	853	-	-	STD	8	TL	-		km/h - bar	4.10
													100	1800
	11L - 15 FI	8 LB	10 LB ; 8 J	279	777	347	2214	STD	8	TL	-		km/h - bar	4.10
													100	1400
	11L - 15 FI	8 LB	10 LB ; 8 J	279	777	347	2214	STD	12	TL	-		km/h - bar	6.20
													100	1800
	12.5L - 15 FI	10 LB	-	317	815	362	2323	STD	12	TL	-		km/h - bar	6.20
													100	2120

STD: Standard

Technologies

High Speed

Performance

Durability

High Load Capacity



TRAILER

Bias



BK 823

BK 823 is a field-oriented tire mainly designed for 2WD tractors, implement machinery and trailers in transport and soil tillage applications. Its special block pattern makes the tire particularly suitable for heavy-duty service.

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	3.20
	9.00 - 16	6.5	-	245	891	394	2583	STD	10	TL	121 A8		40	1450
	9.00 - 16	6.5	-	245	891	394	2583	STD	12	TT	124 A8		km/h - bar	3.80
													40	1600
	9.00 - 16	6.5	-	245	891	394	2583	STD	14	TT	127 A8		km/h - bar	4.40
													40	1750
	9.00 - 16	6.5	-	245	891	394	2583	HD	14	TT	127 A8		km/h - bar	4.40
													40	1750

STD: Standard -HD: Heavy Duty

Technologies

Heavy Duty

Block Pattern

Performance

Cut and Chip Resistance

Heavy Duty

Steering Control



TRAILER

Bias



SL 441

SL 441 is a free rolling tire developed for soil tillage operations with trailers and implement machinery. SL 441 has been engineered to provide best handling to drivers.

∅ 14.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	5.00
	200/60 - 14.5	6.75	4.50 E ; 5.50 F	210	610	278	1785	STD	10	TT	106 A8		**10 FR**	1330
													25 FR	1130
													30 FR	1065
													40 FR	950
													km/h - bar	**7.00**
	200/60 - 14.5	6.75	4.50 E ; 5.50 F	210	610	278	1785	STD	14	TT	113 A8		**10 FR**	1610
													25 FR	1370
													30 FR	1290
													40 FR	1150
													km/h - bar	**7.00**
	200/60 - 14.5	6.75	4.50 E ; 5.50 F	210	610	278	1785	STD	14	TL	113 A8		**10 FR**	1610
													25 FR	1370
													30 FR	1290
													40 FR	1150

STD: Standard

Performance

Durability

High Load Capacity



Bias



ST 180

ST 180 is a road-oriented tire developed for soil tillage and transport applications with trailers and implement machinery. Its specific tread pattern ensures a long tire life-cycle due to reduced wear and contributes to significant fuel savings.

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 6.20
∅ 8”	4.80 - 8	3.75 - I - 55	3.75 - I - 70	121	418	-	-	STD	6	TL	-		100	345
	5.70 - 8	4.50 - I - 55	I - 70 ; I - 90 ; 3.75	142	475	-	-	STD	6	TL	-		km/h - bar	5.20
													100	412
	5.70 - 8	4.50 - I - 55	I - 70 ; I - 90 ; 3.75	142	475	-	-	STD	8	TL	-		km/h - bar	6.90
													100	487
∅ 9”	6.00 - 9	4.00 - I - 55	4.50 - I - 55 ; I - 70 ; I - 90	165	540	-	-	STD	8	TT	-		km/h - bar	5.90
													100	630
	6.00 - 9	4.00 - I - 55	4.50 - I - 55 ; I - 70 ; I - 90	165	540	-	-	STD	8	TL	-		km/h - bar	5.90
													100	630
	6.00 - 9	4.00 - I - 55	4.50 - I - 55 ; I - 70 ; I - 90	165	540	-	-	STD	10	TL	-		km/h - bar	6.90
													100	690
	6.00 - 9	4.00 - I - 55	4.50 - I - 55 ; I - 70 ; I - 90	165	540	-	-	STD	12	TT	-		km/h - bar	7.90
													100	830
	6.00 - 9	4.00 - I - 55	4.50 - I - 55 ; I - 70 ; I - 90	165	540	-	-	STD	12	TL	-		km/h - bar	7.90
													100	830
∅ 10”	5.00 - 10	3.5	-	142	530	-	-	STD	6	TL	-		km/h - bar	3.00
													100	390

STD: Standard

Technologies

Aramid Belted

Performance

Cut and Chip Resistance

High Puncture Resistance

ST 180

∅ 13"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	2.50
	ST 165/80 D 13	4½ J	5 J ; 5½ J ; 6 J	156	597	272	1746	STD	4	TL	-		40	450
	ST 175/80 D 13	5 J	4½ J ; 5½ J ; 6 J	175	620	286	1845	STD	4	TL	-		km/h - bar	2.50
													40	500
	ST 175/80 D 13	5 J	4½ J ; 5½ J ; 6 J	175	620	286	1845	STD	6	TL	-		km/h - bar	3.50
													40	615
	ST 175/80 D 13	5 J	4½ J ; 5½ J ; 6 J	175	620	286	1845	STD	8	TL	-		km/h - bar	4.50
													40	710
∅ 14"	ST 195/75 D 14	5 J	5½ J ; 6 J ; 6½ J	192	668	312	2013	STD	4	TL	-		km/h - bar	2.50
													40	600
	ST 195/75 D 14	5 J	5½ J ; 6 J ; 6½ J	192	668	312	2013	STD	6	TL	-		km/h - bar	3.50
													40	730
	ST 195/75 D 14	5 J	5½ J ; 6 J ; 6½ J	192	668	312	2013	STD	8	TL	-		km/h - bar	4.50
													40	850
	ST 205/65 D 14	5 J	5½ J	190	621	292	1875	STD	6	TL	-		km/h - bar	3.50
													40	800
	ST 205/75 D 14	6 J	5 J ; 5½ J ; 6 J	200	682	317	2049	STD	4	TL	-		km/h - bar	2.50
													40	650
	ST 205/75 D 14	6 J	5 J ; 5½ J ; 6 J	200	682	317	2049	STD	6	TL	-		km/h - bar	3.50
													40	800
	ST 215/75 D 14	6 J	5½ J ; 6½ J ; 7 J	205	682	320	2073	STD	6	TL	-		km/h - bar	3.50
													40	850

STD: Standard

Technologies

Aramid Belted

Performance

Cut and Chip Resistance

High Puncture Resistance

ST 180

∅	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	5.50
∅ 14"	ST 215/75 D 14	6 J	5½ J ; 6½ J ; 7 J	205	682	320	2073	AB	10	TL	-		40	1120
	ST 215/75 D 14	6 J	5Â½ J ; 6Â½ J ; 7 J	205	682	320	2073	SPL	10	TL	-		km/h - bar	5.50
													40	1120
∅ 15"	ST 205/65 D 15	6 J	5½ J ; 6½ J	193	648	303	1935	STD	6	TL	-		km/h - bar	3.50
													40	825
	ST 205/75 D 15	5½ J	5 J ; 6 J ; 7 J	195	702	327	2103	STD	4	TL	-		km/h - bar	2.50
													40	670
	ST 205/75 D 15	5½ J	5 J ; 6 J ; 7 J	195	702	327	2103	STD	6	TL	-		km/h - bar	3.50
													40	825
	ST 225/75 D 15	6 J	5½ J ; 6½ J ; 7 J	217	730	337	2178	STD	6	TL	-		km/h - bar	3.50
													40	975
	ST 225/75 D 15	6 J	5½ J ; 6½ J ; 7 J	217	730	337	2178	STD	8	TL	-		km/h - bar	4.50
													40	1150

STD: Standard - AB: Aramid Belted - SPL: Special

Technologies

Aramid Belted

Performance

Cut and Chip Resistance

High Puncture Resistance



Bias



TR 387

TR 387 is an agro-industrial tire suitable for trailers. It features outstanding flotation capability and is available in different versions to meet specific user requirements in terms of cut and chip resistance, heavy-duty services and durability. The "dual bead" version is particularly suitable for industrial tractors and transport operations on trailers.

∅ 26"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	1.80
	18.4 - 26	DW 16 L	DW 15 L	475	1430	635	4150	STD	10	TL	142 A6		**30**	2650
	18.4 - 26	DW 16 L	DW 15 L	475	1430	635	4150	STD	12	TL	142 A6		**km/h - bar**	**2.30**
													30	3000
	18.4 - 26	DW 16 L	DW 15 L	475	1430	635	4150	HD	16	TL	152 A6		**km/h - bar**	**2.90**
													30	3550
	23.1 - 26	DW 20 B	-	592	1560	690	4685	STD	8	TL	145 A6		**km/h - bar**	**1.10**
													30	2900
	23.1 - 26	DW 20 B	-	592	1560	690	4685	STD	12	TL	153 A6		**km/h - bar**	**1.70**
													30	3650
	23.1 - 26	DW 20 B	-	592	1560	690	4685	HD	12	TL	164 A6		**km/h - bar**	**1.70**
													30	5000
	23.1 - 26	DW 20 B	-	592	1560	690	4685	STD	16	TL	159 A6		**km/h - bar**	**2.30**
													30	4375
	23.1 - 26	DW 20 B	-	592	1560	690	4685	DB	16	TL	159 A6		**km/h - bar**	**2.30**
													30	4375
	23.1 - 26	DW 20 B	-	592	1560	690	4685	DB HD	18	TT	161 A6		**km/h - bar**	**2.60**
													30	4625

STD: Standard - HD: Heavy Duty - DB: Dual Bead - DB HD: Dual Bead HD

Performance

Durability

High Load Capacity

TR 387

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire)	
													km/h - bar	2.60
∅ 26"	23.1 - 26	DW 20 B	-	592	1560	690	4685	DB HD	18	TL	161 A6		30	4625
	23.1 - 26	DW 20 B	-	592	1560	690	4685	HD DB SPL	18	TL	161 A6		km/h - bar	2.60
													30	4625
∅ 28"	12.4 - 28	W 11	W 9; W 10	325	1200	550	3576	STD	8	TL	123 A6		km/h - bar	2.30
													30	1550
	16.9 - 28	DW 15 L	DW 14 L	440	1400	630	4074	STD	8	TL	135 A6		km/h - bar	1.70
													30	2180
∅ 30"	16.9 - 30	DW 15 L	DW 14 L	440	1450	655	4220	STD	8	TL	137 A6		km/h - bar	1.70
													30	2300
	18.4 - 30	DW 16 L	DW 15 L	475	1530	680	4395	STD	8	TL	139 A6		km/h - bar	1.40
													30	2430
	18.4 - 30	DW 16 L	DW 15 L	475	1530	680	4395	HD	14	TT	151 A6		km/h - bar	2.60
													30	3450
	620/75 - 30	DW 20 A; DW 20 B	-	605	1675	-	-	STD	18	TL	164 A6		km/h - bar	2.60
													30	5000
∅ 32"	24.5 - 32	DH 21	DH 21 B; DH 21 H; DH 21 HB	625	1755	790	5226	STD	16	TL	164 A6		km/h - bar	2.10
													30	5000

DB HD SPL: Dual Bead HD Special - DB HD: Dual Bead HD - STD: Standard - HD: Heavy Duty

Performance

Durability

High Load Capacity

Bias



TR 390

TR 390 is an agro-industrial tire suitable for trailers. TR 390 features outstanding flotation capability and increased durability. Its "dual bead HD" version is particularly suitable for industrial tractors and transport operations on trailers, whereas its "dual bead HD special" version is ideal for heavy-duty service.

∅ 26"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire)	
													km/h - bar	1.10
	23.1 - 26	DW 20 B	-	587	1560	690	4545	STD	8	TL	145 A6		30	2900
	23.1 - 26	DW 20 B	-	587	1560	690	4545	STD	12	TL	153 A6		km/h - bar	**1.70**
													30	3650
	23.1 - 26	DW 20 B	-	587	1560	690	4545	STD	16	TL	159 A6		km/h - bar	**2.30**
													30	4375
	23.1 - 26	DW 20 B	-	587	1560	690	4545	DB HD	18	TL	161 A6		km/h - bar	**2.60**
													30	4625
	23.1 - 26	DW 20 B	-	587	1560	690	4545	HD DB SPL	18	TL	161 A6		km/h - bar	**2.60**
													30	4625
	28L - 26	DW 25 B	DW 23 B	714	1560	690	4545	STD	12	TL	154 A6		km/h - bar	**1.40**
													30	3750
	28L - 26	DW 25 B	DW 23 B	714	1560	690	4545	STD	16	TL	160 A6		km/h - bar	**1.90**
													30	4500
	28L - 26	DW 25 B	DW 23 B	714	1560	690	4545	DB HD	20	TL	172 A6		km/h - bar	**2.80**
													30	6300

DB HD SPL: Dual Bead HD Special - DB HD: Dual Bead HD - STD: Standard

Performance

Durability

High Load Capacity

Bias



TR 391

TR 391 is an agro-industrial tire suitable for transport and compacting operations with trailers and compactors. TR 391 features outstanding flotation capability to avoid soil damages.

∅ 24"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	1.40
	14.9 - 24	DW 13	DW 11 ; DW 13 L ; DW 12	405	1255	563	3639	STD	6	TL	123 A6		30	1550
	14.9 - 24	DW 13	DW 11 ; DW 12 ; DW 13 L	405	1255	563	3639	STD	8	TL	128 A6		km/h - bar	1.80
													30	1800
	14.9 - 24	DW 13	DW 11 ; DW 12 ; DW 13 L	405	1255	563	3639	STD	8	TL	128 A6		km/h - bar	1.80
													30	1800

STD: Standard

Performance

Durability

High Load Capacity

Bias



BK 308

BK 308 has been specially designed for trailers and utility tractors. It features excellent traction on all surfaces and tread tie bars to reduce tread groove cracking. The strong casing provides excellent durability and puncture resistance whereas the special tread compound ensures a longer service life.

∅ 20"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	4.8
	6.50 - 20	5.50 F	4.00 E ; 5.00 F	190	865	-	-	STD	10	TT	112 A6		30	1120

STD: Standard

Performance

Durability

Traction

High Puncture Resistance

Bias



AGRI TRAILER

AGRI TRAILER has been specially designed for tractor trailers. It is the ideal tire for modern farming, suitable for applications both on and off the road. Its robust construction results in high load capacity, whereas its extra-deep tread allows for a better mileage.

∅ 20"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	9.30	8.60
	10.00 - 20	7.5	7.0 ; 8.0	286	1080	-	-	STD	18	TT	-		30 LS	3845	-
													30 LD	-	3405

STD: Standard

Technologies

Extra Deep Tread

Performance

Durability

High Load Capacity

High Mileage



Bias



ARROW

ARROW is suitable for transport applications with trailers and light trucks. It is a road-oriented tire that allows significant fuel savings to improve farmers' productivity.

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	5.00
∅ 14"	6.50 - 14	4.5 J	-	175	695	STD	10	TT		100 LS	925
										100 LD	815
	6.50 - 14LT	4.5 J	-	175	695	HD	10	TT		km/h - bar	5.00
										100 LS	925
										100 LD	815

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	6.20
∅ 16"	7.50 - 16	6.00 G	5.50 F	216	825	STD	12	TT		100 LS	1400
										100 LD	1250
	7.50 - 16	6.00 G	5.50 F	216	825	STD	14	TT		km/h - bar	6.90
										100 LS	1500
										100 LD	1320
	7.50 - 16	6.00 G	5.50 F	216	825	STD	16	TT		km/h - bar	7.60
										100 LS	1600
										100 LD	1400

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	7.60	6.90
∅ 20"	9.00 - 20	7.0	6.5 ; 7.5	270	1040	STD	14	TT		100 LS	2575	-
										100 LD	-	2240
	9.00 - 20	7.0	6.5 ; 7.5	270	1040	STD	16	TT		km/h - bar	7.95	7.25
										100 LS	2650	-
										100 LD	-	2360

STD: Standard - HD: Heavy Duty

Technologies

Special Compound

High Speed

Performance

Durability

High Load Capacity

High Mileage

ARROW

∅ 20"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	7.95	7.25
	10.00 - 20	7.5	7.0 ; 8.0	286	1075	STD	16	TT		100 LS	3000	-
										100 LD	-	2650

										km/h - bar	7.25
	9.00 - 20	7.0	6.5 ; 7.5	270	1040	TR TR	16	TT		40	2715

STD: Standard - TR TR: Tractor Trailer

Technologies

- Special Compound
- High Speed

Performance

- Durability
- High Load Capacity
- High Mileage



TRAILER

Bias



BK 208

BK 208 is suitable for transport applications on trailers and light trucks.
It is a considerably durable and reliable tire for both in-the-field and on-the-road usage.

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	6.20
	7.50 - 16	6.00 G	-	212	810	STD	12	TT		100 LS	1400
										100 LD	1250
	7.50 - 16	6.00 G	-	212	810	STD	14	TT		km/h - bar	6.90
										100 LS	1500
										100 LD	1320
	7.50 - 16	6.00 G	-	212	810	STD	16	TT		km/h - bar	7.60
										100 LS	1600
										100 LD	1400

STD: Standard

Performance

Durability

On/Off Road

TRAILER

Bias



BK 627

BK 627 is a block pattern tire suitable for transport and soil tillage operations with trailers and implement machinery. It is mainly field oriented and ideal for heavy-duty service.

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	5.00
	7.50 - 16	6.0	-	220	810	365	2495	STD	12	TT	121 A8		40	1450

STD: Standard

Performance

Heavy Duty

Bias



BK 826

BK 826 has been specially designed for trailers in transport applications. It is a bias tire featuring excellent traction even under heavy-duty service conditions. BK 826 is also available as "industrial" version that shows particular cut-and-chip resistance and is also suitable for backhoe loaders.

∅ 16" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire)	
												km/h - bar	4.25
8.25 - 16	6.50 H	6.00 G	238	863	-	-	STD	8	TT	-		100 LS	1350
												100 LD	1275
8.25 - 16	6.50 H	6.00 G	238	863	-	-	STD	14	TT	-		km/h - bar	6.90
												100 LS	1745
												100 LD	1650
8.25 - 16	6.50 H	6.00 G	238	863	-	-	STD	16	TT	-		km/h - bar	7.60
												100 LS	1850
												100 LD	1750
8.25 - 16	6.50 H	6.00 G	238	863	-	-	IND	16	TT	-		km/h - bar	8.40
												40 LS	2130
												40 LD	2015
8.25 - 16	6.50 H	6.00 G	238	863	-	-	TR TR	16	TT	134 A8		km/h - bar	7.60
												40	2120
8.25 - 16	6.50 H	6.00 G	238	863	-	-	STD	18	TT	-		km/h - bar	7.95
												100 LS	1900
												100 LD	1800
8.25 - 16	6.50 H	6.00 G	238	863	-	-	IND	18	TT	-		km/h - bar	7.95
												100 LS	1900
												100 LD	1800
9.00 - 16	6.50 H	6.00 G	265	925	-	-	STD	12	TT	-		km/h - bar	5.15
												30	1900

STD: Standard -IND: Industrial - TR TR: Tractor Trailer

Technologies

Reinforced Carcass

Performance

Cut and Chip Resistance

High Load Capacity

BK 826

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire)	
													km/h - bar	5.15
	9.00 - 16	6.50 H	6.00 G	265	925	-	-	SPL	12	TT	-		30	1900
	9.00 - 16	6.50 H	6.00 G	265	925	-	-	STD	14	TT	-		km/h - bar	**6.20**
													30	2120
	9.00 - 16	6.50 H	6.00 G	265	925	-	-	STD	16	TT	-		km/h - bar	**7.25**
													30	2300
	9.00 - 16	6.50 H	6.00 G	265	925	-	-	IND	16	TT	-		km/h - bar	**7.25**
													30	2300
	9.00 - 16	6.50 H	6.00 G	265	925	-	-	STD	18	TT	-		km/h - bar	**7.60**
													30	2360
	9.00 - 16	6.50 H	6.00 G	265	925	-	-	TR TR	18	TT	138 A8		km/h - bar	**7.60**
													30	2360
	9.00 - 16	6.50 H	6.00 G	265	925	-	-	TR TR	18	TT	138 A8		km/h - bar	**7.60**
													30	2360

STD: Standard -IND: Industrial - SPL: Special - TR TR: Tractor Trailer


Technologies

Reinforced Carcass

Performance

Cut and Chip Resistance

High Load Capacity

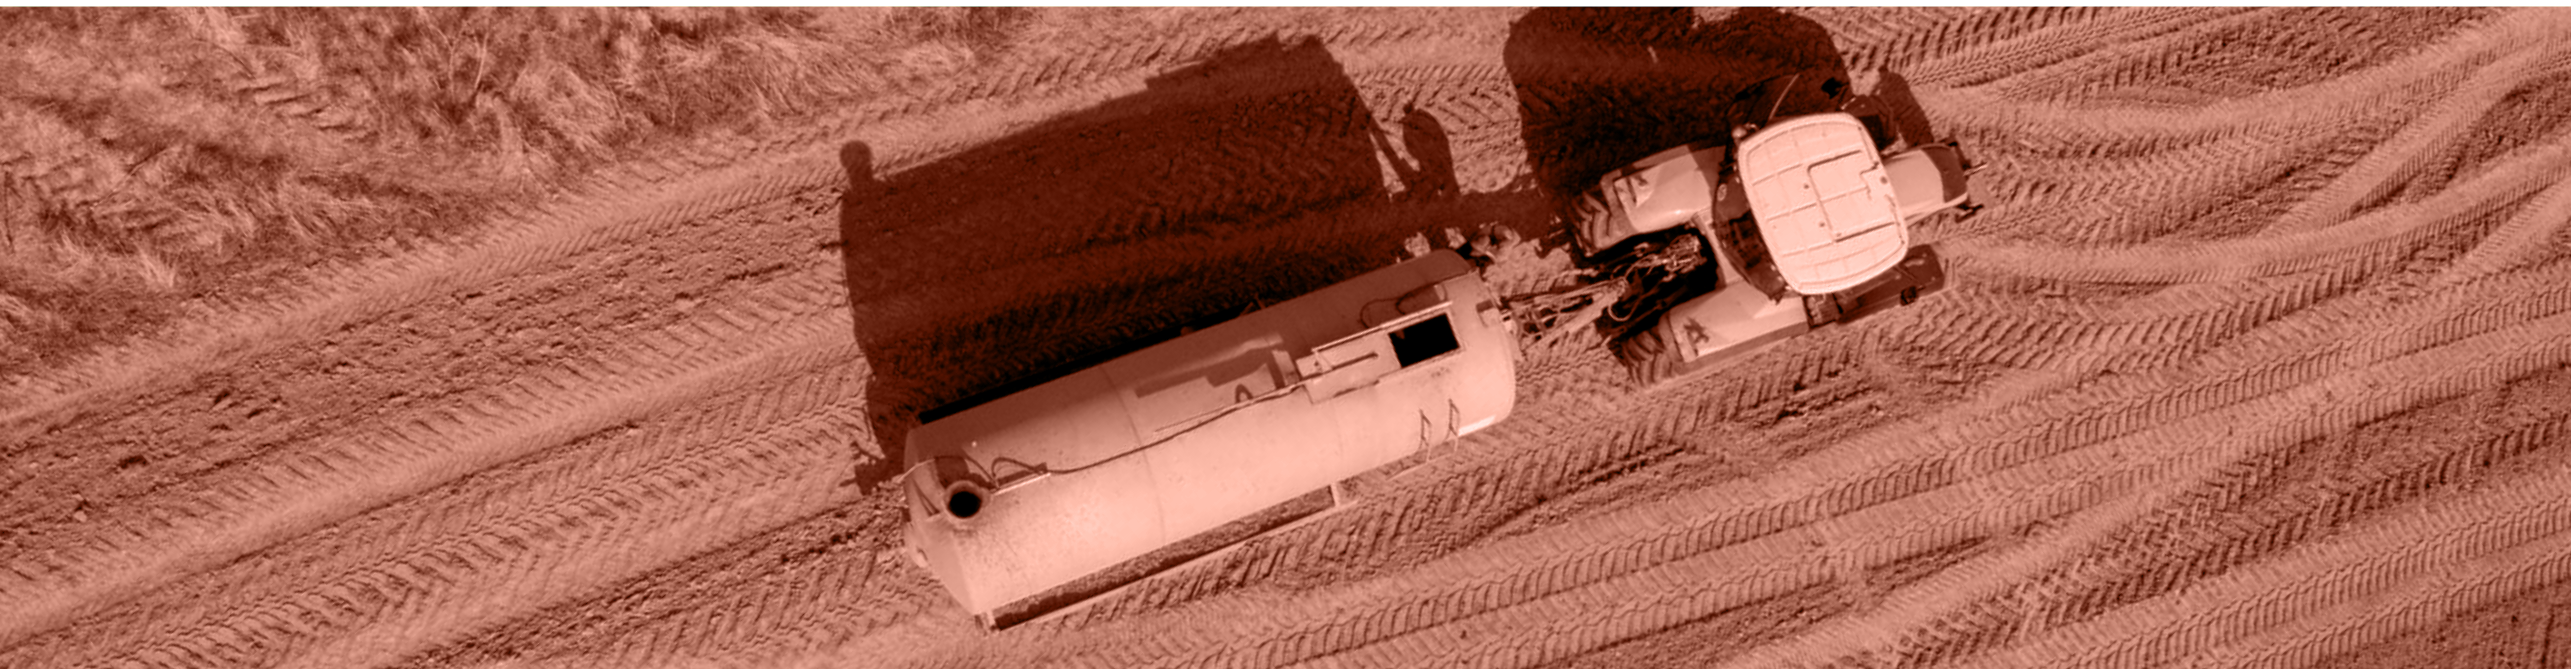

TRAILER

Bias



BK RUF N TUF

BK RUF N TUF is a block pattern tire suitable for transport operations with trailers and light trucks. It is ideal for road usage and ensures excellent durability.

Performance

Durability

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	4.15
	7.50 - 16	6.00 G	5.50 F	216	830	STD	8	TT		100 LS	1120
										100 LD	975
	7.50 - 16	6.00 G	5.50 F	216	830	STD	12	TT		km/h - bar	6.20
										100 LS	1400
										100 LD	1250
	7.50 - 16	6.00 G	5.50 F	216	830	STD	14	TT		km/h - bar	6.90
										100 LS	1500
										100 LD	1320
	7.50 - 16	6.00 G	5.50 F	216	830	STD	14	TL		km/h - bar	6.90
										100 LS	1500
										100 LD	1320
	7.50 - 16	6.00 G	5.50 F	216	830	STD	16	TT		km/h - bar	7.60
										100 LS	1600
										100 LD	1400

STD: Standard



Bias



COLT

COLT is a block pattern tire suitable for transport with trailers and light trucks, both in the field and on the road. COLT ensures extended durability and high performance during the entire product life-cycle.

∅ 15"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	6.00
	7.50 - 15	6.00	-	217	790	STD	12	TT		100 LS	1385
										100 LD	1315
	7.50 - 15	6.00	-	217	790	STD	14	TT		km/h - bar	6.50
										100 LS	1450
										100 LD	1375
	7.50 - 15	6.00	-	217	790	STD	16	TT		km/h - bar	7.50
										100 LS	1500
										100 LD	1440
∅ 16"	7.50 - 16	6.00 G	5.50 F	212	820	STD	14	TT		km/h - bar	6.90
										100 LS	1500
										100 LD	1320
	7.50 - 16	6.00 G	5.50 F	212	820	STD	16	TT		km/h - bar	7.60
										100 LS	1600
										100 LD	1400
	7.50 - 16	6.00 G	5.50 F	212	820	IND	16	TT		km/h - bar	8.40
										40	1840

STD: Standard - IND: Industrial

Performance

Durability

High Mileage

Traction

Bias



D 404

D 404 is a road-oriented tire ideal for transport applications with trailers and light trucks. An excellent grip on the road along with regular wear turns into extra durability.

∅ 14"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire)	
										km/h - bar	4.25
	6.00 - 14	4.5J	4 J ; 5 J	170	690	STD	8	TT		100 LS	750
										100 LD	710
	6.50 - 14	4.5 J	-	175	695	STD	8	TT		km/h - bar	4.30
										100 LS	840
										100 LD	795
	6.50 - 14	4.5 J	-	175	695	STD	10	TT		km/h - bar	5.00
										100 LS	925
										100 LD	815
∅ 15"	7.00 - 15	5.50 F	5 K	198	760	STD	8	TT		km/h - bar	4.15
										100 LS	925
										100 LD	825
	7.00 - 15	5.50 F	5 K	198	760	STD	10	TT		km/h - bar	5.15
										100 LS	1060
										100 LD	925
	7.00 - 15	5.50 F	5 K	198	760	STD	12	TT		km/h - bar	6.20
										100 LS	1180
										100 LD	1030
	7.50 - 15	6.00	-	217	785	STD	12	TT		km/h - bar	6.00
										100 LS	1385
										100 LD	1315
	7.50 - 15	6.00	-	217	785	STD	14	TT		km/h - bar	6.50
										100 LS	1450
										100 LD	1375

Performance

Durability

Road Oriented

STD: Standard

D 404

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire)	
										km/h - bar	5.15
	7.00 - 16	5.50 F	6.00 G	198	785	STD	10	TT		100 LS	1090
										100 LD	975
	7.00 - 16	5.50 F	6.00 G	198	785	STD	12	TT		km/h - bar	6.20
										100 LS	1215
										100 LD	1065
	7.00 - 16	5.50 F	6.00 G	198	785	STD	14	TT		km/h - bar	6.90
										100 LS	1320
										100 LD	1150
	7.00 - 16	5.50 F	6.00 G	198	785	STD	16	TT		km/h - bar	7.60
										100 LS	1390
										100 LD	1225
	7.50 - 16	6.00 G	5.50 F	212	810	STD	10	TT		km/h - bar	5.15
										100 LS	1250
										100 LD	1090
	7.50 - 16	6.00 G	5.50 F	212	810	STD	12	TT		km/h - bar	6.20
										100 LS	1215
										100 LD	1060
	7.50 - 16	6.00 G	5.50 F	212	820	STD	14	TT		km/h - bar	6.90
										100 LS	1500
										100 LD	1320
	7.50 - 16	6.00 G	5.50 F	212	810	STD	16	TT		km/h - bar	7.60
										100 LS	1600
										100 LD	1400

STD: Standard

Performance

Durability

Road Oriented

D 404

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire)	
										km/h - bar	4.25
	8.25 - 16	6.50 H	6.00 G	238	858	STD	8	TT		100 LS	1350
										100 LD	1275
	8.25 - 16	6.50 H	6.00 G	238	858	STD	14	TT		km/h - bar	6.90
										100 LS	1745
										100 LD	1650
	8.25 - 16	6.50 H	6.00 G	238	858	STD	16	TT		km/h - bar	7.60
										100 LS	1850
										100 LD	1750
	8.25 - 16	6.50 H	6.00 G	238	858	STD	18	TT		km/h - bar	7.95
										100 LS	1900
										100 LD	1800

Performance

Durability

Road Oriented

STD: Standard



TRAILER

Bias



D 405

D 405 is a road-oriented tire ideal for transport applications with trailers and light trucks. An excellent grip on the road along with regular wear turns into extra durability.

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire)	
										km/h - bar	6.20
	7.50 - 16	6.00 G	5.50 F	212	810	STD	12	TT		100 LS	1400
										100 LD	1250
	7.50 - 16	6.00 G	5.50 F	212	810	STD	14	TT		km/h - bar	6.90
										100 LS	1500
										100 LD	1320
	7.50 - 16	6.00 G	5.50 F	212	810	STD	16	TT		km/h - bar	7.60
										100 LS	1600
										100 LD	1400
	9.00 - 16	6.50 H	6.00 G	255	925	STD	12	TT		km/h - bar	5.15
										30	1900
	10.50 - 16	6.00 T	–	290	980	STD	14	TT		km/h - bar	6.90
										100 LS	2575
										100 LD	2300

STD: Standard

Performance

Durability

Road Oriented



Bias



DON 2000

DON 2000 is a suitable for transport operations with trailers and light trucks both on and off the road. It ensures extra durability along with high performance during the entire product life-cycle.

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	7.60
∅ 16"	7.50 - 16	6.00 G	5.50 F	216	840	STD	16	TT		100 LS	1600
										100 LD	1400

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	7.95	7.25
∅ 20"	9.00 - 20	7.0	6.5 ; 7.5	270	1048	STD	16	TT		100 LS	2650	-
										100 LD	-	2360

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	7.25
	9.00 - 20	7.0	6.5 ; 7.5	270	1048	TT	16	TT		40	2715

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	8.75	8.00
	10.00 - 20	7.5	7.0 ; 8.0	286	1080	IND TRAILER	16	TT		40 LS	3450	-
										40 LD	-	3050

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	9.10	8.40
	10.00 - 20	7.5	7.0 ; 8.0	286	1080	IND TRAILER	18	TT		40 LS	3535	-
										40 LD	-	3135

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	7.95	7.25
	12.00 - 20	8.5	8.0 ; 9.0	315	1145	STD	18	TT		100 LS	3750	-
										100 LD	-	3350

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	7.95	7.25
∅ 24"	12.00 - 24	8.5	8.0 ; 9.0	315	1245	STD	18	TT		100 LS	4250	-
										100 LD	-	3750

STD: Standard - IND TRAILER: Industrial Trailer

Performance

Durability

Road Oriented

Bias



FLOTATION V LINE

FLOTATION V LINE has been specially designed for trailers in transport applications. It shows high flotation capability and ensures low soil compaction protecting the field. FLOTATION V LINE allows you to carry high loads at low pressure maximizing your business productivity.

∅ 22.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS Drive Wheel	LI/SS Free Rolling	
	500/60 - 22.5	AG 16.00	15.00 ; 17.00	500	1170	510	3489	STD	12	TL	145 A8/142 B	157 A8/154 B	
	500/60 - 22.5	AG 16.00	15.00 ; 17.00	500	1170	510	3489	STD	16	TL	151 A8/148 B	163 A8/159 B	
	550/60 - 22.5	AG 16.00	-	550	1240	540	3725	STD	12	TL	148 A8/144 B	160 A8/156 B	
	550/60 - 22.5	AG 16.00	-	550	1240	540	3725	STD	16	TL	154 A8/150 B	167 A8/163 B	

Load capacity (kg/tire)

km/h - bar	1.50	2.00	2.40
10 FR	4390	5195	5775
20 FR	3950	4675	5200
30 FR	3510	4155	4620
40 FR	3135	3710	4125
50 FR	2820	3340	3750
10 DW	3085	3645	4060
20 DW	2780	3280	3655
30 DW	2470	2920	3250
40 DW	2205	2605	2900
50 DW	1985	2345	2650

km/h - bar	2.80	3.00	3.20
10 FR	6315	6575	6825
20 FR	5685	5915	6145
30 FR	5050	5260	5460
40 FR	4510	4695	4875
50 FR	4060	4225	4375
10 DW	4465	4650	4830
20 DW	4020	4185	4345
30 DW	3575	3720	3865
40 DW	3190	3320	3450
50 DW	2870	2990	3150

km/h - bar	1.50	1.80	2.10
10 FR	5175	5755	6300
20 FR	4655	5180	5670
30 FR	4140	4605	5040
40 FR	3695	4110	4500
50 FR	3325	3700	4000
10 DW	3620	4030	4410
20 DW	3255	3630	3970
30 DW	2895	3225	3530
40 DW	2585	2880	3150
50 DW	2325	2590	2800

km/h - bar	2.40	2.60	2.80
10 FR	6970	7310	7630
20 FR	6275	6575	6865
30 FR	5580	5845	6105
40 FR	4980	5220	5450
50 FR	4480	4700	4875
10 DW	4795	5025	5250
20 DW	4315	4525	4725
30 DW	3835	4020	4200
40 DW	3425	3590	3750
50 DW	3085	3230	3350

STD: Standard

Performance

Field Protection

Excellent Flotation

Reduced Soil Compaction

TRAILER

Bias



MT 612

MT 612 has been specially designed for multipurpose use on and off the road. Its strong casing allows carrying heavy loads at high speed whereas its broad lugs provide outstanding traction. The extra tread width ensures excellent flotation on sand and mud.

∅ 20"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	6.60
	14.00 - 20	10	-	390	1265	594	3827	STD	18	TT	-		80 LS	4500
													80 LD	4000
	14.00 - 20	10	-	390	1265	594	3827	STD	20	TT	-		km/h - bar	7.60
													80 LS	4875
													80 LD	4375
	14.00 - 20	10	-	390	1265	594	3827	STD	22	TT	-		km/h - bar	8.60
													80 LS	5300
													80 LD	4750
	16.0/70 - 20	13.00 T	-	408	1100	520	3327	STD	16	TT	-		km/h - bar	4.50
													80 LS	3075
													80 LD	2725

STD: Standard

Performance

Durability

For Muddy Ground

Traction



TRAILER

Bias



RM 2002

RM 2002 is suitable for transport operations with trailers and light trucks, both on and off the road. It ensures long durability and top performance along the entire product life-cycle. Its "industrial" version is ideal for pick & carry cranes. .

Performance

Durability

∅ 20"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	7.95	7.25
	11.00 - 20	8.0	7.5 ; 8.5	302	1101	STD	16	TT		**100 LS**	3250	-
										100 LD	-	2900
	11.00 - 20	8.0	7.5 ; 8.5	302	1101	IND	16	TT		**km/h - bar**	**7.95**	**7.25**
										100 LS	3250	-
										100 LD	-	2900
	11.00 - 20	8.0	7.5 ; 8.5	302	1101	IND	18	TT		**km/h - bar**	**8.25**	**7.60**
										100 LS	3350	-
										100 LD	-	3000
	12.00 - 20	8.5	8.0 ; 9.0	315	1145	STD	18	TT		**km/h - bar**	**7.95**	**7.25**
										100 LS	3750	-
										100 LD	-	3350

STD: Standard - IND: Industrial



TRAILER

Bias



TUF LUG

TUF LUG is suitable for trailers and light trucks in transport applications. This tire offers good traction and great durability and ensures a long product life-cycle.

∅ 16"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	6.20
	7.50 - 16	6.00 G	5.50 F	216	830	STD	12	TT		100 LS	1400
										100 LD	1250
	7.50 - 16	6.00 G	5.50 F	216	830	STD	14	TT		km/h - bar	6.90
										100 LS	1500
										100 LD	1320
	7.50 - 16	6.00 G	5.50 F	216	830	STD	16	TT		km/h - bar	7.60
										100 LS	1600
										100 LD	1400

Performance

Durability

Traction

STD: Standard



TRAILER

Bias



VIJETA

VIJETA is an agricultural tire suitable for both on- and off-the-road applications. The 5-rib pattern optimizes load distribution. In addition, the wear-resistant compound and the strong casing stand for a long tire life-cycle.

∅ 19"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire)	
													km/h - bar	3.80
	5.00 - 19	3.00	-	140	755	-	-	STD	6	TT	94 A3		15	670
	6.00 - 19	4.00	-	175	810	-	-	STD	8	TT	105 A3		km/h - bar	4.15
													15	925
	7.00 - 19	5.00	-	195	852	-	-	STD	10	TT	-		km/h - bar	5.15
													15	1360
	8.00 - 19	5.00	-	225	912	-	-	STD	10	TT	-		km/h - bar	5.15
													15	1660

Performance

Durability


STD: Standard



TRANSPORT



Bias



MH TR 182

MH TR 182 is suitable for transport operations with mobile home vehicles. It is a road-oriented, high-speed tire that significantly reduces fuel consumption. MH TR 182 ensures long durability and high performance along the entire product life-cycle.

∅ 14.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 4.80
	8 - 14.5	6.00 MH	-	207	710	STD	8	TL		**100**	1030
	8 - 14.5	6.00 MH	-	207	710	STD	10	TL		**km/h - bar**	**5.90**
										100	1180
	8 - 14.5	6.00 MH	-	207	710	STD	12	TL		**km/h - bar**	**6.90**
										100	1285
	8 - 14.5	6.00 MH	-	207	710	STD	14	TL		**km/h - bar**	**7.60**
										100	1390

STD: Standard

Performance

Durability

Fuel Economy

Road Oriented



Bias



LT TR 182

LT TR 182 is suitable for transport operations on light trucks. This high-speed tire is road oriented and significantly reduces fuel consumption. The LT TR 182 tire is also easy to mount.

∅ 14.5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	6.90
	8 - 14.5	6.00 MH	-	207	710	STD	12	TL		100 LS	1285
										100 LD	1130
	8 - 14.5	6.00 MH	-	207	710	STD	14	TL		km/h - bar	7.90
										100 LS	1375
										100 LD	1210


STD: Standard

Performance

Durability

Fuel Economy

Road Oriented

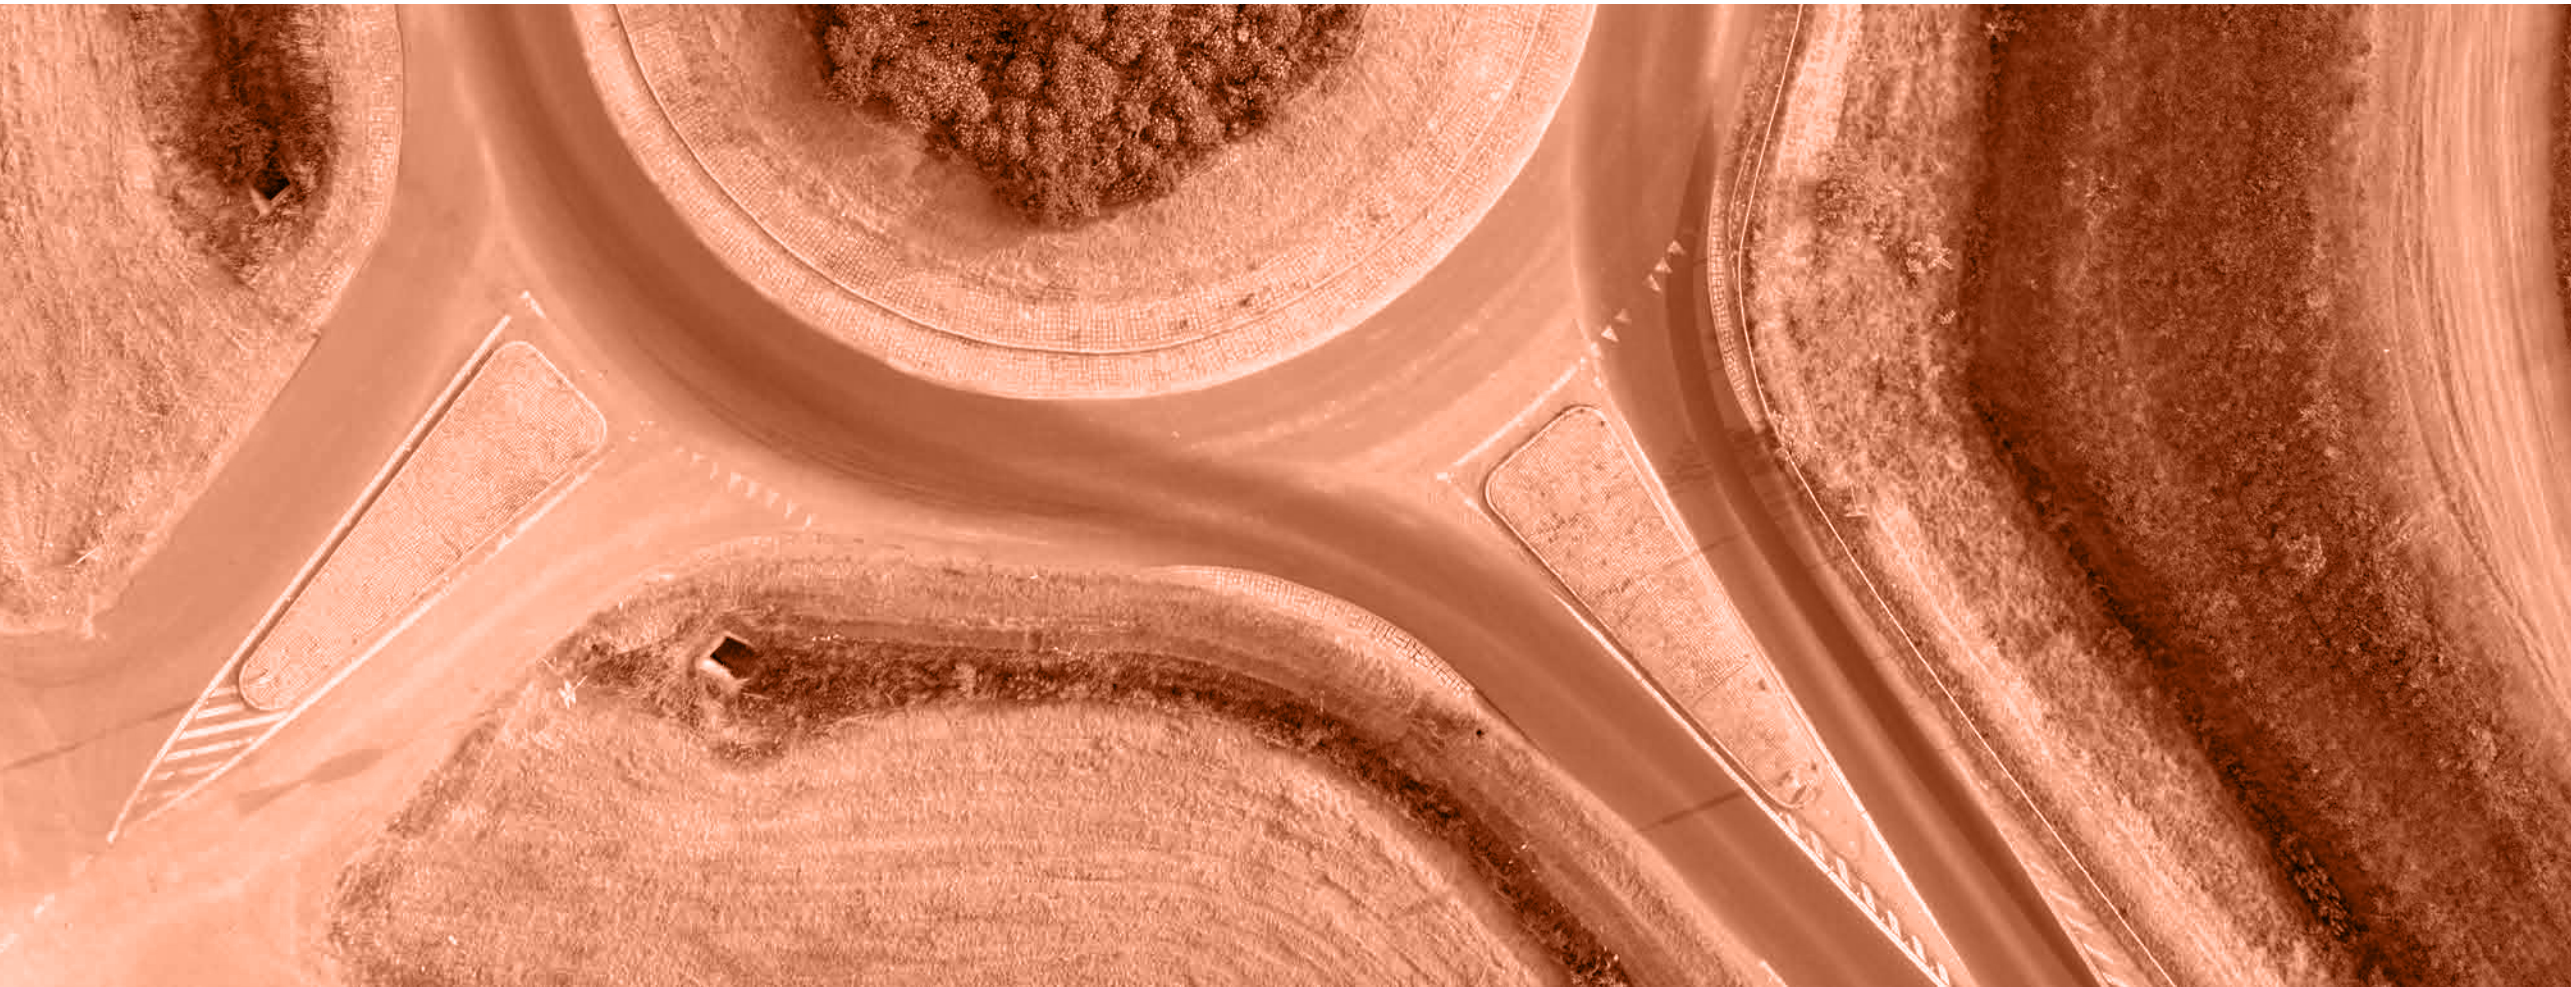

ATV

Bias



W 207

W 207 is BKT's all-terrain tire suitable for ATVs. Its design provides the best traction in any condition. This tire features an excellent puncture resistance over challenging terrains.

∅	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 0.45
∅ 8"	AT 22 X 11 - 8	9.0 AT	8.5 AT	272	561	-	-	STD	6	TL	-		100	180
∅ 9"	AT 22 X 11 - 9	9.0 AT	8.5 AT	272	561	-	-	STD	6	TL	-		100	180
	AT 25 X 13 - 9	10.5 AT	10.0 AT	330	635	-	-	STD	6	TL	-		80	243
	AT 25 X 12 - 9	9.5 AT	9.0 AT ; 10.0 AT	300	632	-	-	STD	6	TL	-		100	224
∅ 10"	AT 22 X 11 - 10	9.0 AT	8.5 AT	272	561	-	-	STD	6	TL	-		100	175
	AT 22 X 7 - 10	5.5 AT	6.0 AT	178	559	-	-	STD	6	TL	-		100	115
	AT 22 X 8 - 10	6.5 AT	6.0 AT	203	559	-	-	STD	6	TL	-		100	125
	AT 23 X 10 - 10	8.0 AT	7.5 AT ; 8.5 AT	249	587	-	-	STD	6	TL	-		80	170
	AT 23 X 7 - 10	5.5 AT	6.0 AT	177	584	-	-	STD	6	TL	-		100	125

STD: Standard

Technologies

M+S

Performance

Sport

Traction

W 207

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 0.45
∅ 10"	AT 23 X 8 - 10	6.5 AT	6.0 AT	203	589	-	-	STD	6	TL	-		80	136
	AT 24 X 11 - 10	9.0 AT	8.5 AT	279	610	-	-	STD	6	TL	-		km/h - bar 100	0.45 200
	AT 25 X 11 - 10	9.0 AT	8.5 AT	285	640	-	-	STD	6	TL	-		km/h - bar 80	0.45 206
	AT 25 X 12 - 10	9.5 AT	9.0 AT ; 10.0 AT	297	640	-	-	STD	6	TL	-		km/h - bar 80	0.45 224
∅ 11"	AT 23 X 8 - 11	6.5 AT	6.0 AT	203	584	-	-	STD	6	TL	-		km/h - bar 80	0.45 132
	AT 24 X 10 - 11	8.0 AT	7.5 AT ; 8.5 AT	249	612	-	-	STD	6	TL	-		km/h - bar 80	0.45 180
	AT 24 X 8 - 11	6.5 AT	6.0 AT	203	612	-	-	STD	6	TL	-		km/h - bar 80	0.45 145
	AT 24 X 9 - 11	7.0 AT	7.5 AT	226	610	-	-	STD	6	TL	-		km/h - bar 80	0.45 165
	AT 25 X 10 - 11	8.0 AT	7.5 AT ; 8.5 AT	249	638	-	-	STD	6	TL	-		km/h - bar 80	0.45 190
	AT 25 X 8 - 11	6.5 AT	6.0 AT	203	638	-	-	STD	6	TL	-		km/h - bar 80	0.45 161
∅ 12"	AT 24 X 8 - 12	6.5 AT	6.0 AT	198	615	-	-	STD	6	TL	-		km/h - bar 80	0.45 140

STD: Standard

Technologies

M+S

Performance

Sport

Traction

W 207

∅ 12" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 0.45
AT 25 X 10 - 12	8.0 AT	6.5 AT ; 7.5 AT ; 8.5 AT	249	638	-	-	STD	6	TL	-		100	190
AT 25 X 11 - 12	9.0 AT	8.5 AT	284	638	-	-	STD	6	TL	-		km/h - bar 80	0.45 206
AT 25 X 8 - 12	6.5 AT	6.0 AT	198	638	-	-	STD	6	TL	-		km/h - bar 100	0.45 155
AT 25 X 8 - 12	6.5 AT	6.0 AT	198	638	-	-	SPL	6	TL	-		km/h - bar 100	0.45 155
AT 26 X 10 - 12	8.0 AT	7.5 AT ; 8.5 AT	241	658	-	-	STD	6	TL	-		km/h - bar 100	0.45 200
AT 26 X 12 - 12	9.5 AT	8.0 AT ; 8.5 AT ; 9.0 AT	299	658	-	-	STD	6	TL	-		km/h - bar 100	0.45 236
AT 26 X 8 - 12	6.50 AT	6.00 AT	204	660	-	-	STD	6	TL	-		km/h - bar 80	0.45 175
AT 27 X 10 - 12	8.0 AT	7.5 AT ; 8.5 AT	241	683	-	-	STD	6	TL	-		km/h - bar 100	0.45 222
AT 27 X 12 - 12	9.5 AT	8.5 AT ; 9.0 AT	299	683	-	-	STD	6	TL	-		km/h - bar 100	0.45 250
AT 28 X 10 - 12	8.0 AT	7.5 AT ; 8.5 AT	241	706	-	-	STD	6	TL	-		km/h - bar 100	0.45 231
AT 28 X 12 - 12	9.5 AT	8.5 AT ; 9.0 AT	299	706	-	-	STD	6	TL	-		km/h - bar 100	0.45 258

STD: Standard - SPL: Special

Technologies

M+S

Performance

Sport

Traction

Bias



AT 112

AT 112 is an all-terrain tire for ATVs. It is particularly suitable for loose surfaces.

Performance

Sport

∅	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 1.50
∅ 8"	AT 20 X 10 - 8	8.0 AT	7.5 AT ; 8.5 AT	240	510	-	-	STD	4	TL	-		80	541
∅ 10"	AT 20 X 10 - 10	8.0 AT	7.5 AT ; 8.5 AT	240	510	-	-	STD	4	TL	-		km/h - bar	1.50
													80	527
∅ 12"	AT 23 X 10 - 12	8.0 AT	7.5 AT ; 8.5 AT	240	585	-	-	STD	4	TL	-		km/h - bar	1.50
													80	618

STD: Standard



Bias



AT 108

AT 108 is an all-terrain tire suitable for ATVs. Its tread design provides excellent traction on loose surfaces.

∅	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 0.35
∅ 8"	AT 20 X 7 - 8	5.5 AT	6.0 AT	170	508	-	-	STD	4	TL	-		100	88
	AT 22 X 11 - 8	9.0 AT	8.5 AT	277	560	-	-	STD	4	TL	-		km/h - bar	0.35
													100	155
∅ 9"	AT 22 X 10 - 9	8.0 AT	7.5 AT ; 8.5 AT	254	559	-	-	STD	4	TL	-		km/h - bar	0.35
													100	136
	AT 22 X 11 - 9	9.0 AT	8.5 AT	275	557	-	-	STD	4	TL	-		km/h - bar	0.35
													80	155
	AT 22 X 11 - 9	9.0 AT	8.5 AT	275	557	-	-	STD	6	TL	-		km/h - bar	0.45
													100	180
	AT 25 X 12 - 9	9.5 AT	9.0 AT ; 10.0 AT	292	640	-	-	STD	4	TL	-		km/h - bar	0.35
													80	195
	AT 25 X 13 - 9	10.5 AT	10.0 AT	320	635	-	-	STD	4	TL	-		km/h - bar	0.35
													80	212
	AT 25 X 13 - 9	10.5 AT	10.0 AT	320	635	-	-	STD	6	TL	-		km/h - bar	0.45
													80	243
∅ 10"	AT 20 X 10 - 10	8.0 AT	7.5 AT ; 8.5 AT	250	514	-	-	STD	4	TL	-		km/h - bar	0.35
													80	118

STD: Standard

Performance

Comfort

On/Off Road

AT 108

∅ 10" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	0.55
AT 20 X 10 - 10	8.0 AT	7.5 AT ; 8.5 AT	250	514	-	-	STD	8	TL	-		80	155
AT 22 X 11 - 10	9.0 AT	8.5 AT	270	564	-	-	STD	4	TL	-		km/h - bar	0.35
												80	150
AT 22 X 8 - 10	6.5 AT	6.0 AT	206	557	-	-	STD	4	TL	-		km/h - bar	0.35
												80	109
AT 22 X 11 - 10	9.0 AT	8.5 AT	270	564	-	-	STD	6	TL	-		km/h - bar	0.45
												100	175
AT 22 X 8 - 10	6.5 AT	6.0 AT	206	557	-	-	STD	6	TL	-		km/h - bar	0.45
												100	125
AT 23 X 10 - 10	8.0 AT	7.5 AT ; 8.5 AT	259	594	-	-	STD	4	TL	-		km/h - bar	0.35
												80	145
AT 23 X 8 - 10	6.5 AT	6.0 AT	210	594	-	-	STD	4	TL	-		km/h - bar	0.35
												80	118
AT 24 X 11 - 10	9.0 AT	8.5 AT	284	608	-	-	STD	4	TL	-		km/h - bar	0.35
												100	175
AT 24 X 11 - 10	9.0 AT	8.5 AT	284	608	-	-	STD	6	TL	-		km/h - bar	0.45
												80	200
AT 25 X 12 - 10	9.5 AT	9.0 AT ; 10.0 AT	298	630	-	-	STD	4	TL	-		km/h - bar	0.35
												80	195
AT 25 X 12 - 10	9.5 AT	9.0 AT ; 10.0 AT	298	630	-	-	STD	6	TL	-		km/h - bar	0.45
												80	224

STD: Standard

Performance

Comfort

On/Off Road

AT 108

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 0.35
∅ 11"	AT 22 X 7 - 11	5.5 AT	-	181	557	-	-	STD	4	TL	-		80	97.5
	AT 23 X 8 - 11	6.5 AT	6.0 AT	191	594	-	-	STD	4	TL	-		km/h - bar 80	0.35 115
	AT 23 X 8 - 11	6.5 AT	6.0 AT	191	594	-	-	STD	6	TL	-		km/h - bar 80	0.45 132
	AT 24 X 10 - 11	8.0 AT	7.5 AT ; 8.5 AT	254	615	-	-	STD	4	TL	-		km/h - bar 80	0.35 155
	AT 24 X 8 - 11	6.5 AT	6.0 AT	206	610	-	-	STD	4	TL	-		km/h - bar 80	0.35 125
	AT 24 X 9 - 11	7.0 AT	7.5 AT	220	605	-	-	STD	4	TL	-		km/h - bar 80	0.35 140
	AT 24 X 9 - 11	7.0 AT	7.5 AT	220	605	-	-	STD	6	TL	-		km/h - bar 80	0.45 165
∅ 12"	AT 25 X 10 - 12	8.0 AT	6.5 AT ; 7.5 AT ; 8.5 AT	254	640	-	-	STD	4	TL	-		km/h - bar 100	0.35 165
	AT 25 X 8 - 12	6.5 AT	6.0 AT	212	630	-	-	STD	4	TL	-		km/h - bar 100	0.35 132
	AT 25 X 10 - 12	8.0 AT	6.5 AT ; 7.5 AT ; 8.5 AT	254	640	-	-	STD	6	TL	-		km/h - bar 100	0.45 190
	AT 25 X 8 - 12	6.5 AT	6.0 AT	212	630	-	-	STD	6	TL	-		km/h - bar 100	0.45 155

Performance

Comfort

On/Off Road

STD: Standard

Bias



AT 109

AT 109 is suitable for both all-terrain and lawn and garden applications with ATVs. AT 109 is the ideal tire on loose surfaces.

Performance

Field Protection

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 0.28
∅ 6"	AT 145 X 70 - 6	4.5	–	137	366	-	-	STD	2	TL	-		100	45
∅ 7"	AT 16 X 8 - 7	6.5 AT	6.0 AT	183	419	-	-	STD	2	TL	-		km/h - bar	0.21
													100	52
∅ 8"	AT 18 X 9.5 - 8	7.5 AT	8.0 AT	220	468	-	-	STD	2	TL	-		km/h - bar	0.45
													100	102
	AT 20 X 7 - 8	5.5 AT	6.0 AT	170	504	-	-	STD	2	TL	-		km/h - bar	0.45
													100	100
	AT 21 X 9 - 8	7.0 AT	6.5 AT ; 7.5 AT	222	536	-	-	STD	2	TL	-		km/h - bar	0.21
													100	85
	AT 22 X 11 - 8	9.0 AT	8.5 AT	230	579	-	-	STD	2	TL	-		km/h - bar	0.21
													100	112
∅ 9"	AT 25 X 12 - 9	9.5 AT	9.0 AT ; 10.0 AT	269	617	-	-	STD	2	TL	-		km/h - bar	0.35
													100	195

STD: Standard

Bias



AT 110

AT 110 is suitable for both all-terrain and lawn and garden applications with ATVs. AT 110 is the ideal tire on loose surfaces.

∅	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 0.35
∅ 8"	AT 20 X 7 - 8	5.5 AT	6.0 AT	183	508	-	-	STD	4	TL	-		100	88
∅ 9"	AT 21 X 8 - 9	6.5 AT	6.0 AT	204	541	-	-	STD	4	TL	-		km/h - bar	0.35
													80	103
∅ 10"	AT 21 X 7 - 10	5.5 AT	6.0 AT	178	531	-	-	STD	4	TL	-		km/h - bar	0.35
													100	93
	AT 22 X 8 - 10	6.5 AT	6.0 AT	204	548	-	-	STD	4	TL	-		km/h - bar	0.35
													80	109
	AT 23 X 7 - 10	5.5 AT	6.0 AT	178	584	-	-	STD	4	TL	-		km/h - bar	0.35
													100	109

Performance

Steering Control

STD: Standard



Bias



AT 111

AT 111 is suitable for all-terrain sport applications with ATVs. The tire is ideal for loose surfaces and provides excellent traction in all conditions. An "HD" version with a deep tread is available for users who need improved durability.

Performance

Sport

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 0.25
∅ 8"	AT 18 X 10 - 8	8.0 AT	7.5 AT ; 8.5 AT	254	457	-	-	STD	2	TL	-		80	85
	AT 18 X 10 - 8	8.0 AT	7.5 AT ; 8.5 AT	254	457	-	-	STD	4	TL	-		km/h - bar	0.35
													100	103
	AT 20 X 11 - 8	9.0 AT	8.5 AT	282	508	-	-	STD	6	TL	-		km/h - bar	0.45
													80	155
	AT 22 X 11 - 8	9.0 AT	8.5 AT	282	559	-	-	STD	6	TL	-		km/h - bar	0.45
													100	180
∅ 9"	AT 18 X 10 - 9	8.0 AT	7.5 AT ; 8.5 AT	254	457	-	-	STD	4	TL	-		km/h - bar	0.35
													100	103
	AT 20 X 11 - 9	9.0 AT	8.5 AT	279	508	-	-	STD	4	TL	-		km/h - bar	0.35
													80	132
	AT 20 X 11 - 9	9.0 AT	8.5 AT	279	508	-	-	STD	6	TL	-		km/h - bar	0.45
													100	155
	AT 22 X 11 - 9	9.0 AT	8.5 AT	282	559	-	-	STD	4	TL	-		km/h - bar	0.35
													80	155
	AT 22 X 11 - 9	9.0 AT	8.5 AT	282	559	-	-	STD	6	TL	-		km/h - bar	0.45
													100	180
∅ 10"	AT 18 X 10 - 10	8.0 AT	7.5 AT ; 8.5 AT	254	457	-	-	STD	4	TL	-		km/h - bar	0.35
													100	100

STD: Standard

AT 111

Performance

Sport

∅ 10" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	0.95
AT 19 X 6 - 10	5.0 AT	-	152	472	-	-	STD	4	TL	-		80	100
AT 20 X 6 - 10	5.0 AT	-	152	500	-	-	STD	2	TL	-		km/h - bar	0.70
												80	90
AT 20 X 6 - 10	5.0 AT	-	152	500	-	-	STD	4	TL	-		km/h - bar	0.95
												100	105
AT 20 X 11 - 10	9.0 AT	8.5 AT	275	508	-	-	STD	6	TL	-		km/h - bar	0.45
												100	150
AT 21 X 7 - 10	5.5 AT	6.0 AT	178	541	-	-	STD	4	TL	-		km/h - bar	0.35
												100	93
AT 21 X 7 - 10	5.5 AT	6.0 AT	178	541	-	-	STD	6	TL	-		km/h - bar	0.45
												100	106
AT 22 X 11 - 10	9.0 AT	8.5 AT	282	559	-	-	STD	4	TL	-		km/h - bar	0.35
												80	150
AT 22 X 7 - 10	5.5 AT	6.0 AT	175	559	-	-	STD	4	TL	-		km/h - bar	0.35
												100	100
AT 22 X 11 - 10	9.0 AT	8.5 AT	282	559	-	-	STD	6	TL	-		km/h - bar	0.45
												100	175
AT 22 X 7 - 10	5.5 AT	6.0 AT	175	559	-	-	STD	6	TL	-		km/h - bar	0.45
												100	115
AT 22 X 8 - 10	6.5 AT	6.0 AT	208	559	-	-	STD	6	TL	-		km/h - bar	0.45
												100	125
AT 23 X 7 - 10	5.5 AT	6.0 AT	178	584	-	-	STD	4	TL	-		km/h - bar	0.35
												100	109
AT 23 X 7 - 10	5.5 AT	6.0 AT	178	584	-	-	STD	6	TL	-		km/h - bar	0.45
												100	125

STD: Standard

Bias

AT 111 HD



AT 111 HD is suitable for all-terrain sport applications with ATVs on loose surfaces. The increased tread depth and the thick sidewall provide extra grip and braking control in addition to extraordinary traction and high-speed control in power slides. AT 111 HD features outstanding sidewall protection and ensures an extended tire life-cycle.

∅	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 0.45
∅ 9"	AT 20 X 11 - 9	9.0 AT	8.5 AT	275	515	-	-	STD	6	TL	-		100	155
	AT 22 X 11 - 9	9.0 AT	8.5 AT	279	560	-	-	STD	6	TL	-		km/h - bar	0.45
													100	180
∅ 10"	AT 20 X 11 - 10	9.0 AT	8.5 AT	279	505	-	-	STD	6	TL	-		km/h - bar	0.45
													100	150
	AT 21 X 7 - 10	5.5 AT	6.0 AT	178	533	-	-	STD	6	TL	-		km/h - bar	0.45
													100	106
	AT 22 X 11 - 10	9.0 AT	8.5 AT	279	560	-	-	STD	6	TL	-		km/h - bar	0.45
													100	175
	AT 22 X 7 - 10	5.5 AT	6.0 AT	174	560	-	-	STD	6	TL	-		km/h - bar	0.45
													100	115
	AT 23 X 7 - 10	5.5 AT	6.0 AT	174	585	-	-	STD	6	TL	-		km/h - bar	0.45
													100	125

STD: Standard

Performance

Sport

Durability

Traction

Bias



AT 119

AT 119 is an all-terrain tire suitable for ATVs. Its tread design provides excellent traction on loose surfaces.

∅ 8"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	0.25
	AT 22 X 11 - 8	9.0 AT	8.5 AT	280	580	-	-	STD	2	TL	-		80	125
	AT 22 X 11 - 8	9.0 AT	8.5 AT	280	580	-	-	STD	4	TL	-		km/h - bar	0.35
													80	155

STD: Standard

Performance

Field Protection



Bias



AT 171

AT 171 is suitable for on-and-off-the-road applications with ATV vehicles. The special directional and extra-deep tread design provides excellent traction on wet and muddy surfaces. AT 171 comes up with optimum self-cleaning properties along with extraordinary cut and chip resistance. The strong casing ensures extra durability and a long service life.

Performance

Traction

	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	Load capacity (kg/tire) km/h - bar	1.40	1.00
∅ 14"	AT 28 X 9 - 14	W 7	W 6	205	715	-	-	STD	6	TL	77 A8 / 53 F	40 MUD BOGGING	412	-
												80 MUD BOGGING	206	-
												40 CASUAL TRANSPORT	-	335
												80 CASUAL TRANSPORT	-	170
	AT 30 X 9 - 14	W 7	W 6	211	755	-	-	STD	6	TL	77 A8 / 53 F	40 MUD BOGGING	412	-
												80 MUD BOGGING	206	-
												40 CASUAL TRANSPORT	-	335
												80 CASUAL TRANSPORT	-	170
∅ 16"	AT 31 X 9 - 16	W 7	W 6	211	785	-	-	STD	6	TL	80 A8 / 56 F	40 MUD BOGGING	450	-
												80 MUD BOGGING	224	-
												40 CASUAL TRANSPORT	-	370
												80 CASUAL TRANSPORT	-	190
∅ 18"	AT 33 X 8 - 18	W 6	W 5.5	200	845	390	2525	STD	6	TL	83 A8 / 59 F	40 MUD BOGGING	487	-
												80 MUD BOGGING	243	-
												40 CASUAL TRANSPORT	-	400
												80 CASUAL TRANSPORT	-	200
	AT 35 X 10 - 18	W 8	-	241	900	417	2646	STD	8	TT	90 A8/ 66 F	40 MUD BOGGING	600	-
												80 MUD BOGGING	300	-
												40 CASUAL TRANSPORT	-	490
												80 CASUAL TRANSPORT	-	245
	AT 35 X 10 - 18	W 8	-	241	900	417	2646	STD	8	TL	90 A8/ 66 F	40 MUD BOGGING	600	-
												80 MUD BOGGING	300	-
												40 CASUAL TRANSPORT	-	490
												80 CASUAL TRANSPOR	-	245
∅ 20"	AT 33 X 9 - 20	W 7	W 6	205	838	387	2616	STD	6	TL	85 A8 / 61 F	40 MUD BOGGING	515	-
												80 MUD BOGGING	257	-
												40 CASUAL TRANSPORT	-	425
												80 CASUAL TRANSPORT	-	218

STD: Standard

AT 171

Performance

Traction

∅ 20"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	1.40	1.00
	AT 35 X 9 - 20	W 7	W 6	200	895	419	2670	STD	6	TT	85 A8 / 61 F		40 MUD BOGGING	515	-
													80 MUD BOGGING	257	-
													40 CASUAL TRANSPORT	-	425
													80 CASUAL TRANSPORT	-	218
	AT 35 X 9 - 20	W 7	W 6	200	895	419	2670	STD	6	TL	85 A8 / 61 F		km/h - bar	1.40	1.00
													40 MUD BOGGING	515	-
													80 MUD BOGGING	257	-
													40 CASUAL TRANSPORT	-	425
													80 CASUAL TRANSPORT	-	218
	AT 38 X 10 - 20	W 8	W 7	235	950	442	2835	STD	6	TT	93 A8 / 69 F		km/h - bar	1.40	1.00
													40 MUD BOGGING	650	-
													80 MUD BOGGING	325	-
													40 CASUAL TRANSPORT	-	530
													80 CASUAL TRANSPORT	-	265
	AT 38 X 10 - 20	W 8	W 7	235	950	442	2835	STD	6	TL	93 A8 / 69 F		km/h - bar	1.40	1.00
													40 MUD BOGGING	650	-
													80 MUD BOGGING	325	-
													40 CASUAL TRANSPORT	-	530
													80 CASUAL TRANSPORT	-	265
∅ 22"	AT 35 X 9 - 22	W7	W6	210	890	0	0	STD	6	TL	88 A8/ 64 F		km/h - bar	1.40	1.00
													40 MUD BOGGING	560	-
													80 MUD BOGGING	280	-
													40 CASUAL TRANSPORT	-	455
													80 CASUAL TRANSPORT	-	230
	AT 37 X 9 - 22	W 7	W 6	205	945	444	2778	STD	8	TT	88 A8/ 64 F		km/h - bar	1.40	1.00
													40 MUD BOGGING	560	-
													80 MUD BOGGING	280	-
													40 CASUAL TRANSPORT	-	455
													80 CASUAL TRANSPORT	-	230
	AT 37 X 9 - 22	W 7	W 6	205	945	444	2778	STD	8	TL	88 A8/ 64 F		km/h - bar	1.40	1.00
													40 MUD BOGGING	560	-
													80 MUD BOGGING	280	-
													40 CASUAL TRANSPORT	-	455
													80 CASUAL TRANSPORT	-	230
	AT 40 X 10 - 22	W 8	W 7	235	1005	469	2955	STD	8	TT	95 A8 / 71 F		km/h - bar	1.40	1.00
													40 MUD BOGGING	690	-
													80 MUD BOGGING	345	-
													40 CASUAL TRANSPORT	-	565
													80 CASUAL TRANSPORT	-	285
	AT 40 X 10 - 22	W 8	W 7	235	1005	469	2955	STD	8	TL	95 A8 / 71 F		km/h - bar	1.40	1.00
													40 MUD BOGGING	690	-
													80 MUD BOGGING	345	-
													40 CASUAL TRANSPORT	-	565
													80 CASUAL TRANSPORT	-	285

STD: Standard

AT 171

∅ 24"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	1.40	1.00
	AT 40 X 9 - 24	W 7	W 6	211	995	462	3112	STD	8	TL	90 A8 / 66 F		40 MUD BOGGING	600	-
													80 MUD BOGGING	300	-
													40 CASUAL TRANSPORT	-	485
													80 CASUAL TRANSPORT	-	243

STD: Standard

Performance

Traction



Bias



BOGMAX

BOGMAX has been specially designed for mud bog racing. The very deep tread pattern ensures excellent traction in extremely wet and muddy conditions whereas the sidewall protectors reduce impacts and possible damages. BOGMAX is a 6-ply-rated tire for extra durability. It also features a cut-and-chip-resistant tread compound and outstanding self-cleaning properties.

Technologies

Deep Tread

M+S

Performance

Sport

Traction

∅ 14"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 0.50
	AT 30 X 10 - 14	7.0 AT	7.5 AT ; 8.0 AT	260	760	-	-	STD	6	TL	58 F		80	236
	AT 32 X 10 - 14	8.0 AT	8.5 AT	250	810	-	-	STD	6	TL	62 F		km/h - bar 80	0.50 265

STD: Standard

Radial



SIERRA MAX

SIERRA MAX has been specially designed for ATVs in mud racing. Its radial construction provides a significantly smoother and more comfortable ride over extreme terrains such as deserts, or dirty and rocky surfaces. The special tread design along with its wider footprint provides outstanding forward and lateral traction. Specific shoulder bars provide best sidewall protection. SIERRA MAX is made of a particularly cut-and-chip-resistant compound and has excellent self-cleaning features.

SIERRAMAX ATV & GO KART TIRES

Technologies

M+S

Performance

Sport

Comfort

Traction

∅ 12"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Type		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 0.50
	AT 25 X 8 R 12	43 F	6.5	-	206	640	-	-	-	STD	TL		80	155
	AT 25 X 10 R 12	50 F	8.0	-	260	640	-	-	-	STD	TL		km/h - bar 80	0.50 190

STD: Standard

SIERRA MAX

∅ 14"	Tire size	LI/SS	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	Type		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 0.50
	AT 26 X 9 R 14	48 F	7.00	-	230	675	-	-	-	STD	TL		80	180
	AT 26 X 11 R 14	54 F	9.00	-	280	675	-	-	-	STD	TL		km/h - bar	0.50
													80	212
	AT 27 X 9 R 14	50 F	7.00	-	230	700	-	-	-	STD	TL		km/h - bar	0.50
													80	190
	AT 27 X 11 R 14	56 F	9.00	-	280	700	-	-	-	STD	TL		km/h - bar	0.50
													80	224

STD: Standard

Technologies

M+S

Performance

Sport

Comfort

Traction



GO KART



GO KART

Bias



SM 48 (GK)

SM 48 (GK) has been specially designed for go karts. Its smooth tread design provides excellent performance in sport activities. Shore A hardness 48.

∅ 5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	4.00
	10 X 4.5 - 5	4.5	-	130	260	STD	-	TL		80	130
	11 X 7.10 - 5	6.75	-	190	295	STD	-	TL		km/h - bar	4.00
										80	135

STD: Standard

Performance

Sport

GO KART

Bias



SM 54 (GK)

SM 54 (GK) has been specially designed for go karts. Its smooth tread design provides excellent performance in sport activities. Shore A hardness 54.

∅ 5"	Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	4.00
	10 X 4.5 - 5	4.5	-	130	260	STD	-	TL		80	130
	11 X 7.10 - 5	6.75	-	190	295	STD	-	TL		km/h - bar	4.00
										80	135

STD: Standard

Performance

Sport

GO KART

Bias



SM 68 (GK)

SM 68 has been specially designed for go karts. Its smooth tread design provides excellent performance in sport activities. Shore A hardness 68.

∅ 5" Tire size	RIM Rec.	RIM Alt.	S.W. (mm)	O.D. (mm)	Version	PR	Type		Load capacity (kg/tire) km/h - bar	Load capacity (kg/tire) 4.00
10 X 4.5 - 5	4.5	-	130	260	STD	-	TL		80	130
11 X 6.00 - 5	6.75	-	185	290	STD	-	TL		km/h - bar	3.86
									80	135
11 X 7.10 - 5	6.75	-	190	295	STD	-	TL		km/h - bar	4.00
									80	135

STD: Standard

Performance

Sport



Application chart

SOIL TILLAGE

TRACTOR		TRACTOR 2WD		ROW CROP, SPRAYER		RICE & CANE	
	PAGE		PAGE		PAGE		PAGE
AGRIMAX V-FLECTO *	34	PRO RIB F2M	508	AGRIMAX SPARGO *	112	AGRIMAX ELOS	126
AGRIMAX FORCE **	40	TF 8181	486	AGRIMAX RT 945	114	TR 270	228
AGRIMAX FORTIS	50	TF 9090	494	AGRIMAX RT 955	120	TR 273	234
AGRIMAX RT 657	56	POWER RIB F2	506	AGRIMAX RT 855	90	PUDDLE SPECIAL	238
AGRIMAX RT 765	64	STEER FARM	512				
AGRIMAX RT 855	90	COMMANDER (F)	502				
RT 857	130	COMMANDER TWIN RIB	504				
AGRIMAX ELOS	126	BK 823	688				
RT 853	128	BK 208	712				
AGRIMAX TURF RT 333	652	BK 308	284				
AGRIMAX SIRIO	54						
RT 851	128						
TR 135	148						
TR 136	182						
FARM 2000	206						
AS 2001	218						
TR 128	144						
TR 137	270						
TR 117	288						
TR 126	142						
TR 144	186						
TR 171	192						
TRAC FARM	220						
COMMANDER (R)	224						
TR 144	186						

* VF TECHNOLOGY
** IF TECHNOLOGY

RADIAL TIRES

BIAS TIRES

HARVESTING / IMPLEMENT

COMBINE/HARVESTER

STANDARD				COTTON PICKER			
FRONT	PAGE	REAR	PAGE	FRONT	PAGE	REAR	PAGE
AGRIMAX TERIS	258	RM 500	628	AGRIMAX TERIS	258	STAR TRAC	268
AGRIMAX RT 600	264	AGRIMAX RT 657	56				
AGRIMAX FORCE	40	FLOTATION TR 675	368				
TR 137	270	FLOTATION 648	338				
TR 135	148						
HARVESTER SPECIAL	268						
COMMANDER (R)	224						

BALER, SEEDER, SPREADER, TRAILER ETC.....

IRRIGATION/PIVOT

STANDARD				HIGH SPEED			
	PAGE		PAGE	FRONT / REAR	PAGE		PAGE
AW 711	516	ST 180	692	RIB 713	564	AGRIMAX RI 818	292
AW 712	626	AGRI GRIP	684	AW 712	626	TR 117	288
TR 882	274	BK 823	688	AS 511	624	TR 118	292
TR 360	272	AT 603	448	I-1	672		
FLOTATION 558	278	AW 726	546	FARM HIGHWAY TOUGH	686		
FLOTATION 648	338	AW 729	548	ST180	692		
AW 702	520	AW 909	550	MH TR 182	744		
AW 705	534	BK 627	712	LT TR 182	746		
AW 708	540	BK 823	688				
AW 726	546	FLOTATION 647	336				
AW 909	550	FLOTATION RIB IMPLEMENT	576				
AW 09	554	FLOTATION TR 675	368				
RIB 774	566	FLOTATION TR 678	372				
RIB 775	574	GF 305 FARM TRAILER	668				
RIB 900	574	MP 567	458				
AS 504	580	PL 846	626				
FARM 2000	616	RIB 324	-				
INDUSTRIAL RIB F3	670	RIB IMPLEMENT	562				
MULTI RIB	578	RIB MASTER	576				
FARM IMPLEMENT (I-1)	672	RIB TRAILER	-				
FARM HIGHWAY TOUGH	686	AW 09	554				
FLOTATION RIB 774	374						
SL 441	690						

Application chart

TRANSPORT

TRAILER, TANK BARREL

FIELD ORIENTED	PAGE	⟷	PAGE	ROAD ORIENTED	PAGE
FL 630 ULTRA	318	FL 635	322	RIDEMAX FL 693 M	304
FL 639	326	FL 637	324	RIDEMAX FL 690	302
FLOTATION 351	328	FL 630 SUPER	312	RIDEMAX FL 699	296
FLOTATION 558	330	V-FLEXA	298	RIDEMAX IT 696	134
FLOTATION 648	338				
FLOTATION 648 T	366				
FLOTATION TR 675	368				
FLOTATION TR 678	372				

FORESTRY

LOG SKIDDER, FORWARDER, HARVESTER

	PAGE
FS 216	380
TR 678	388
FORESTECH	378
F 240	386

MAINTENANCE / HANDLING & MOBILITY

LAWN & GARDEN / ATV / GOLF

	PAGE
SIERRA MAX	782
TR 360	634
LG SMOOTH	634
LG 306	636
LG 307	646
LG 408	648
LG RIB	650
TRAC MASTER	654
TR 313	654
TR 315	656
TR 317	660
TR 319	660
GF 304	664
GF 305 CLASSIC	664
AT 108	758
AT 109	764
AT 110	766
AT 111	768
AT 111 HD	772
AT 112	756
AT 119	774
AT 171	776
BOGMAX	782
W 207	750
TR 126	142
TR 145	190
AT 316	252
AT 119	774
TERRA TRAX	548

* VF TECHNOLOGY
** IF TECHNOLOGY

RADIAL TIRES

BIAS TIRES

Size index

Search by SRI

SRI	TIRE SIZE	PAGE
330	200/70 R 16	64
340	220/70 R 16	64
350	240/70 R 16	64
360	180/95 R 16 (6.50 - 16)	90
	260/70 R 16	64
390	210/95 R 16 (7.50 - 16)	90
	280/70 R 16	64
	320/65 R 16	56
410	210/95 R 18 (7.50 - 18)	90
	280/70 R 18	64
	320/65 R 18	56
	260/70 R 20	64
425	340/65 R 18	56
	210/90 R 20 (8.3 - 20)	90
450	210/95 R 20 (7.50 - 20)	90
	250/85 R 20 (9.5 - 20)	90
	280/70 R 20	66
	300/70 R 20	66
	340/65 R 20	56
475	340/80 R 18	134-398-402
	280/85 R 20 (11.2 - 20)	90
	320/70 R 20	66
	250/85 R 22 (9.5 - 22)	92
	210/90 R 24 (8.3 - 24)	120
500	320/85 R 20 (12.4 - 20)	90
	360/70 R 20	66
	420/65 R 20	56
	250/85 R 24 (9.5 - 24)	92
525	14.9L R 20 (375/75 - 20)	128
	380/70 R 20	66
	440/65 R 20	56
	280/85 R 24 (11.2 - 24)	92
	300/80 R 24 (11.2 - 24)	134
	320/70 R 24	66-68
550	320/85 R 24 (12.4 - 24)	92-130
	360/70 R 24	68
	420/65 R 24	56-134
	210/95 R 28 (8.3 - 28)	120
	250/85 R 28 (9.5 - 28)	94
575	340/85 R 24 (13.6 - 24)	92-94
	360/80 R 24 (13.6 - 24)	134
	380/70 R 24	68
	440/65 R 24	58
	460/65 R 24	134
	280/85 R 28 (11.2 - 28)	94
	210/95 R 32 (8.3 - 32)	120
600	380/85 R 24 (14.9 - 24)	94-130
	400/80 R 24 (14.9 - 24)	134-400-404
	420/70 R 24	71
600	480/65 R 24	58
	320/85 R 28 (12.4 - 28)	98-130
	360/70 R 28	72
	420/65 R 28	58
	230/95 R 32 (9.5 - 32)	120
625	420/85 R 24 (16.9 - 24)	94
	440/80 R 24 (16.9 - 24)	134-400-404
	480/70 R 24	70-72
	540/65 R 24	58
	340/85 R 28 (13.6 - 28)	96-130
	380/70 R 28	72
	440/65 R 28	58
	480/60 R 28 (VF) (NRO)	34
	420/65 R 30	60
	270/95 R 32 (11.2 - 32)	120
650	420/85 R 26 (16.9 - 26)	130
	380/85 R 28 (14.9 - 28)	96-130
	400/80 R 28 (14.9 - 28)	134
	420/70 R 28	74
	480/65 R 28	58-138
	520/60 R 28 (VF) (NRO)	34
	320/85 R 32 (12.4 - 32)	98
	230/95 R 36 (9.5 - 36)	120
675	460/85 R 26 (18.4 - 26)	130
	420/85 R 28 (16.9 - 28)	132
	440/80 R 28 (16.9 - 28)	136-400-404
	480/70 R 28	74
	540/65 R 28 (VF) (NRO)	34-60-138-264
	600/60 R 28 (VF) (NRO)	34
	380/85 R 30 (14.9 - 30)	96-98
	420/70 R 30	76
	320/85 R 34 (12.4 - 34)	98
	270/95 R 36 (11.2 - 36)	120
700	600/65 R 28	60-628
	710/55 R 28 (IF) (CFO) (CHO)	40-258
	420/85 R 30 (16.9 - 30)	98-132
	440/80 R 30 (16.9 - 30)	136
	480/70 R 30	76
	540/65 R 30 (VF) (NRO)	34-55-60-138
	600/60 R 30 (VF) (NRO)	34
	500/80 R 30	-
	320/85 R 36 (12.4 - 36)	102
	270/95 R 38 (11.2 - 38)	120
	230/95 R 40 (9.5 - 40)	122
725	600/70 R 28 (IF)	40
	420/90 R 30	114
	460/85 R 30 (18.4 - 30)	98-132
	480/80 R 30 (18.4 - 30)	136
	600/65 R 30	60
725	710/55 R 30 (IF) (CFO)	40
	380/85 R 34 (14.9 - 34)	100
	340/85 R 36 (13.6 - 36)	102
	320/85 R 38 (12.4 - 38)	102
	230/95 R 42 (9.5 - 42)	122
	210/95 R 44 (8.3 - 44)	122
750	620/75 R 26 (23.1 - 26) (CHO)	258-264
	600/70 R 30 (IF) (VF) (NRO)	36-40-50-54 76-78-138
	420/85 R 34 (16.9 - 34)	100
	440/80 R 34 (16.9 - 34)	136
	480/70 R 34	78-80
	540/65 R 34	54-60-62
	340/85 R 38 (13.6 - 38) (R-2)	102-126
	300/85 R 42 (11.2 - 42)	122
	230/95 R 44 (9.5 - 44)	122
775	750/65 R 26 (28L - 26) (CHO)	258-264
	710/60 R 30 (IF) (CFO)	42
	500/85 R 30	-
	460/85 R 34 (18.4 - 34)	100
	480/80 R 34 (18.4 - 34)	136
	520/70 R 34	80
	600/65 R 34	62
	650/60 R 34 (IF)	42
	710/55 R 34 (IF) (CFO)	42
	380/85 R 38 (14.9 - 38) (VF) (R-2)	104-112-126
	270/95 R 44 (11.2 - 44)	122
800	620/75 R 30 (IF) (CHO)	42-258
	600/70 R 34 (IF)	42-50
	420/85 R 38 (16.9 - 38) (IF) (R-2)	104
	480/70 R 38	80
	540/65 R 38 (VF) (NRO)	36-54-62
	600/60 R 38 (VF) (NRO)	36
	320/90 R 42 (12.4 - 42)	114
	230/95 R 48 (9.5 - 48)	124
825	650/65 R 34 (IF) (CFO)	42
	710/60 R 34 (IF) (CFO)	44
	460/85 R 38 (18.4 - 38)	104
	480/80 R 38 (18.4 - 38)	104-126-128-136
	520/70 R 38	80-82-104
	600/65 R 38	62-138
	650/60 R 38 (VF) (NRO)	36
	270/95 R 46 (11.2 - 46)	122
	300/95 R 46 (12.4 - 46)	122
	320/90 R 46 (12.4 - 46)	114
	340/85 R 46 (13.6 - 46)	122
	270/95 R 48 (11.2 - 48)	124
850	580/80 R 34 (IF) (CFO)	260
875	1050/50 R 32 (CHO)	260-266
875	650/75 R 32 (CHO)	258-264
875	800/65 R 32 (30.5L - 32) (CHO)	260-264-266
	520/85 R 38 (20.8 - 38)	104-106-128
	540/80 R 38	136
	580/70 R 38	82
	620/70 R 38	82-84
	650/65 R 38 (VF) (NRO)	36-44-62-138-266
	710/60 R 38 (IF) (VF) (NRO)	38-46
	480/80 R 42 (18.4 - 42)	106-126
	420/80 R 46 (16.9 - 46)	106-108
	340/85 R 48 (13.6 - 48)	124
	320/90 R 50 (12.4 - 50)	116
925	900/60 R 32 (CHO)	260-266
	710/75 R 32 (IF) (CFO)	260
	680/85 R 32 (IF)	-
	710/75 R 34 (IF) (CFO)	44
	650/75 R 38	84
	710/70 R 38 (VF) (R-2)	38-54-84-86 126-266
	520/85 R 42 (20.8 - 42) (R-2)	106-126-262
	540/80 R 42	136
	620/70 R 42	86-88
	650/65 R 42 (VF) (NRO)	38-62-138
	710/60 R 42 (VF) (NRO)	38
	380/90 R 46 (14.9 - 46) (VF)	112
	480/80 R 46 (18.4 - 46) (VF)	108-112
	300/95 R 52 (12.4 - 52)	124
	270/95 R 54 (11.2 - 54)	124
	320/90 R 54 (12.4 - 54)	116
975	650/85 R 38 (IF) (CFO)	44-50
	800/70 R 38 (IF)	46-50
	900/60 R 38 (IF) (CFO)	46
	650/75 R 42	-
	710/70 R 42 (VF) (IF) (CFO)	46-88-138
	900/50 R 42 (IF)	48
	580/85 R 42 (VF)	-
	520/85 R 46 (20.8 - 46)	108
	620/70 R 46	88
	380/90 R 50 (14.9 - 50)	116
	480/80 R 50 (18.4 - 50) (VF)	110-112
1025	650/85 R 42 (IF)	46
	710/75 R 42 (IF)	48-52
	800/70 R 42 (IF) (CFO)	48
	900/60 R 42 (IF) (VF)	48
	380/105 R 50 (VF)	112
	420/95 R 50 (VF)	112
	520/85 R 50 (20.8 - 50)	110
	380/90 R 54 (14.9 - 54)	116-118
1125	750/75 R 46 (IF)	48

Size index

Search by RIM DIAMETER

DIAMETER	TIRE SIZE	SRI
16	180/95 R 16 (6.50 - 16)	360
	200/70 R 16	330
	210/95 R 16 (7.50 - 16)	390
	220/70 R 16	340
	240/70 R 16	350
	260/70 R 16	360
	280/70 R 16	390
	320/65 R 16	390
18	210/95 R 18 (7.50 - 18)	410
	280/70 R 18	410
	320/65 R 18	410
	340/65 R 18	425
	340/80 R 18	475
20	14.9L R 20 (375/75 - 20)	525
	210/90 R 20 (8.3 - 20)	425
	210/95 R 20 (7.50 - 20)	450
	250/85 R 20 (9.5 - 20)	450
	260/70 R 20	410
	280/70 R 20	450
	280/85 R 20 (11.2 - 20)	475
	300/70 R 20	450
	320/70 R 20	475
	320/85 R 20 (12.4 - 20)	500
	340/65 R 20	450
	360/70 R 20	500
	380/70 R 20	525
	420/65 R 20	500
	440/65 R 20	525
22	250/85 R 22 (9.5 - 22)	475
24	210/90 R 24 (8.3 - 24)	475
	250/85 R 24 (9.5 - 24)	500
	280/85 R 24 (11.2 - 24)	525
	300/80 R 24 (11.2 - 24)	525
	320/70 R 24	525
	320/85 R 24 (12.4 - 24)	550
	340/85 R 24 (13.6 - 24)	575
	360/70 R 24	550
	360/80 R 24 (13.6 - 24)	575
	380/70 R 24	575
	380/85 R 24 (14.9 - 24)	600
	400/80 R 24 (14.9 - 24)	600
	420/65 R 24	550
	420/70 R 24	600
	420/85 R 24 (16.9 - 24)	625
	440/65 R 24	575
	440/80 R 24 (16.9 - 24)	625
	460/65 R 24	575
	480/65 R 24	600
	480/70 R 24	625

DIAMETER	TIRE SIZE	SRI
24	540/65 R 24	625
26	420/85 R 26 (16.9 - 26)	650
	460/85 R 26 (18.4 - 26)	675
	620/75 R 26 (23.1 - 26) (CHO)	750
	750/65 R 26 (28L - 26) (CHO)	775
28	210/95 R 28 (8.3 - 28)	550
	250/85 R 28 (9.5 - 28)	550
	280/85 R 28 (11.2 - 28)	575
	320/85 R 28 (12.4 - 28)	600
	340/85 R 28 (13.6 - 28)	625
	360/70 R 28	600
	380/70 R 28	625
	380/85 R 28 (14.9 - 28)	650
	400/80 R 28 (14.9 - 28)	650
	420/65 R 28	600
	420/70 R 28	650
	420/85 R 28 (16.9 - 28)	675
	440/65 R 28	625
	440/80 R 28 (16.9 - 28)	675
	480/65 R 28	650
	480/70 R 28	675
	520/60 R 28 (VF) (NRO)	650
	540/65 R 28 (VF) (NRO)	675
	600/65 R 28	700
	600/70 R 28 (IF)	725
	710/55 R 28 (IF) (CFO) (CHO)	700
	480/60 R 28 (VF) (NRO)	625
	600/60 R 28 (VF) (NRO)	675
30	380/85 R 30 (14.9 - 30)	675
	420/65 R 30	625
	420/70 R 30	675
	420/85 R 30 (16.9 - 30)	700
	420/90 R 30	725
	440/80 R 30 (16.9 - 30)	700
	460/85 R 30 (18.4 - 30)	725
	480/70 R 30	700
	480/80 R 30 (18.4 - 30)	725
	500/80 R 30	700
	500/85 R 30	775
	540/65 R 30 (VF) (NRO)	700
	600/65 R 30	725
	600/70 R 30 (IF) (VF) (NRO)	750
	620/75 R 30 (IF) (CHO)	800
	710/60 R 30 (IF) (CFO)	775
	710/55 R 30 (IF) (CFO)	725
	600/60 R 30 (VF) (NRO)	700
32	1050/50 R 32 (CHO)	875
	210/95 R 32 (8.3 - 32)	575
	230/95 R 32 (9.5 - 32)	600

DIAMETER	TIRE SIZE	SRI
32	270/95 R 32 (11.2 - 32)	625
	320/85 R 32 (12.4 - 32)	650
	650/75 R 32 (CHO)	875
	680/85 R 32 (IF)	925
	800/65 R 32 (30.5L - 32) (CHO)	875
	900/60 R 32 (CHO)	925
	710/75 R 32 (IF) (CFO)	925
34	320/85 R 34 (12.4 - 34)	675
	380/85 R 34 (14.9 - 34)	725
	420/85 R 34 (16.9 - 34)	750
	440/80 R 34 (16.9 - 34)	750
	460/85 R 34 (18.4 - 34)	775
	480/70 R 34	750
	480/80 R 34 (18.4 - 34)	775
	520/70 R 34	775
	540/65 R 34	750
	600/65 R 34	775
	580/80 R 34 (IF) (CFO)	850
	600/70 R 34 (IF)	800
	650/60 R 34 (IF)	775
	650/65 R 34 (IF) (CFO)	825
	710/60 R 34 (IF) (CFO)	825
	710/75 R 34 (IF) (CFO)	925
	710/55 R 34 (IF) (CFO)	775
36	230/95 R 36 (9.5 - 36)	650
	270/95 R 36 (11.2 - 36)	675
	320/85 R 36 (12.4 - 36)	700
	340/85 R 36 (13.6 - 36)	725
38	270/95 R 38 (11.2 - 38)	700
	320/85 R 38 (12.4 - 38)	725
	340/85 R 38 (13.6 - 38) (R-2)	750
	380/85 R 38 (14.9 - 38) (VF) (R-2)	775
	420/85 R 38 (16.9 - 38) (IF) (R-2)	800
	460/85 R 38 (18.4 - 38)	825
	480/70 R 38	800
	480/80 R 38 (18.4 - 38)	825
	520/70 R 38	825
	520/85 R 38 (20.8 - 38)	875
	540/65 R 38 (VF) (NRO)	800
	540/80 R 38	875
	580/70 R 38	875
	600/60 R 38 (VF) (NRO)	800
	600/65 R 38	825
	620/70 R 38	875
	650/60 R 38 (VF) (NRO)	825
	650/65 R 38 (VF) (NRO)	875
	650/75 R 38	925
	650/85 R 38 (IF) (CFO)	975
	710/60 R 38 (IF) (VF) (NRO)	875

DIAMETER	TIRE SIZE	SRI
38	710/70 R 38 (VF) (R-2)	925
	800/70 R 38 (IF)	975
	900/60 R 38 (IF) (CFO)	975
40	230/95 R 40 (9.5 - 40)	700
42	230/95 R 42 (9.5 - 42)	725
	300/85 R 42 (11.2 - 42)	750
	320/90 R 42 (12.4 - 42)	800
	480/80 R 42 (18.4 - 42)	875
	520/85 R 42 (20.8 - 42) (R-2)	925
	540/80 R 42	925
	580/85 R 42 (VF)	975
	620/70 R 42	925
	650/65 R 42 (VF) (NRO)	925
	650/75 R 42	975
	650/85 R 42 (IF)	1025
	710/60 R 42 (VF) (NRO)	925
	710/70 R 42 (VF) (IF) (CFO)	975
	710/75 R 42 (IF)	1025
	800/70 R 42 (IF) (CFO)	1025
	900/50 R 42 (IF)	975
	900/60 R 42 (IF) (VF)	1025
44	210/95 R 44 (8.3 - 44)	725
	230/95 R 44 (9.5 - 44)	750
	270/95 R 44 (11.2 - 44)	775
46	270/95 R 46 (11.2 - 46)	825
	300/95 R 46 (12.4 - 46)	825
	320/90 R 46 (12.4 - 46)	825
	340/85 R 46 (13.6 - 46)	825
	380/90 R 46 (14.9 - 46) (VF)	925
	420/80 R 46 (16.9 - 46)	875
	480/80 R 46 (18.4 - 46) (VF)	925
	520/85 R 46 (20.8 - 46)	975
	620/70 R 46	975
	750/75 R 46 (IF)	1125
48	230/95 R 48 (9.5 - 48)	800
	270/95 R 48 (11.2 - 48)	825
	340/85 R 48 (13.6 - 48)	875
50	320/90 R 50 (12.4 - 50)	875
	380/90 R 50 (14.9 - 50)	975
	380/105 R 50 (VF)	1025
	420/95 R 50 (VF)	1025
	480/80 R 50 (18.4 - 50) (VF)	975
	520/85 R 50 (20.8 - 50)	1025
52	300/95 R 52 (12.4 - 52)	925
54	270/95 R 54 (11.2 - 54)	925
	320/90 R 54 (12.4 - 54)	925
	380/90 R 54 (14.9 - 54)	1025

Load index

LI	kg	LI	kg	LI	kg	LI	kg
50	190	85	515	120	1400	155	3875
51	195	86	530	121	1450	156	4000
52	200	87	545	122	1500	157	4125
53	206	88	560	123	1550	158	4250
54	212	89	580	124	1600	159	4375
55	218	90	600	125	1650	160	4500
56	224	91	615	126	1700	161	4625
57	230	92	630	127	1750	162	4750
58	236	93	650	128	1800	163	4875
59	243	94	670	129	1850	164	5000
60	250	95	690	130	1900	165	5150
61	257	96	710	131	1950	166	5300
62	265	97	730	132	2000	167	5450
63	272	98	750	133	2060	168	5600
64	280	99	775	134	2120	169	5800
65	290	100	800	135	2180	170	6000
66	300	101	825	136	2240	171	6150
67	307	102	850	137	2300	172	6300
68	315	103	875	138	2360	173	6500
69	325	104	900	139	2430	174	6700
70	335	105	925	140	2500	175	6900
71	345	106	950	141	2575	176	7100
72	355	107	975	142	2650	177	7300
73	365	108	1000	143	2725	178	7500
74	375	109	1030	144	2800	179	7750
75	387	110	1060	145	2900	180	8000
76	400	111	1090	146	3000	181	8250
77	412	112	1120	147	3075	182	8500
78	425	113	1150	148	3150	183	8750
79	437	114	1180	149	3250	184	9000
80	450	115	1215	150	3350	185	9250
81	462	116	1250	151	3450	186	9500
82	475	117	1285	152	3550	187	9750
83	487	118	1320	153	3650	188	10000
84	500	119	1360	154	3750	189	10300

Load Index & Speed Symbol

LI	kg	LI	kg	LI	kg
190	10600	200	14000	210	19000
191	10900	201	14500	211	19500
192	11200	202	15000	212	20000
193	11500	203	15500	213	20600
194	11800	204	16000	214	21200
195	12150	205	16500	215	21800
196	12500	206	17000	216	22400
197	12850	207	17500	217	23000
198	13200	208	18000	218	23600
199	13600	209	18500	219	24300


SPEED SYMBOL

Speed symbol	A2	A4	A6	A8	B	C	D	E	F	G	J	K
Km/h	10	20	30	40	50	60	65	70	80	90	100	110

Highligths


VF TECHNOLOGY

Reduced soil compaction



Over the last decades, a progressive compaction of farming soil occurred. The loss due to this phenomenon is esteemed to reach about 20% of the total harvest. Limiting soil compaction is an urgent practice for maximizing the yield per hectare preserving both the land's integrity and peculiarities.
The new AGRIMAX V-FLECTO shows an optimized footprint and a 10% larger tread profile compared to a standard tire of the same size.
This leads to a remarkable decrease in soil compaction resulting in major overall efficiency in terms of both farming operations and business profits.

AGRIMAX V-FLECTO requires a lower inflation pressure compared to a standard tire or an IF technology tire with loads being equal.

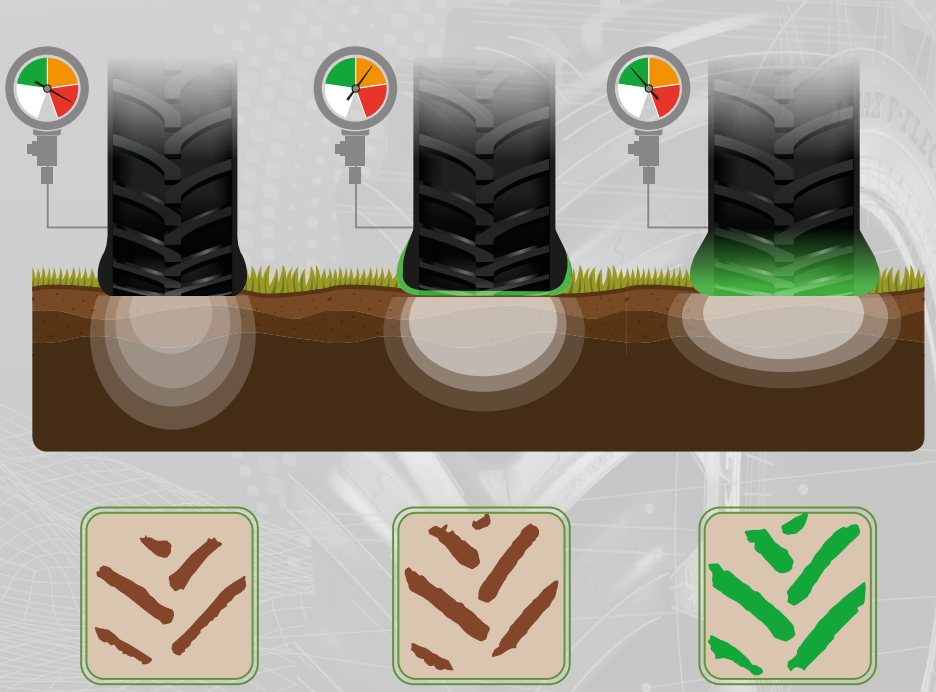


Less operating costs

Specifically conceived for a long product life-cycle and an optimum return on investment, AGRIMAX V-FLECTO has been built for an at least 10% longer tire life compared to an equivalent standard tire.
Even if operating at low pressure, this new BKT tire stands for power and strength as well as excellent resistance over the time, without compromising performance - yet, ensuring less overall costs for tire management.




Same operating time

Standard tire

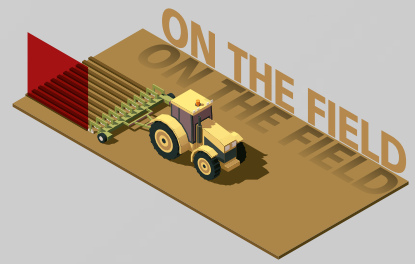

AGRIMAX V-FLECTO tire

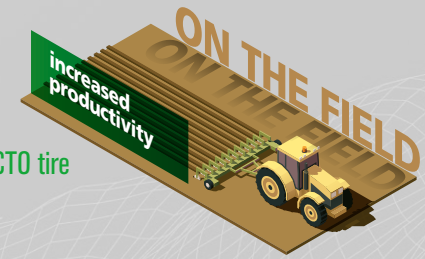





Without any doubt, time is a main - sometimes hidden - determinant in a farming business as far as overall operating costs are concerned.
AGRIMAX V-FLECTO has been designed for the purpose of optimizing operating hours and supporting farmers' profitability, saving them time and money. Thanks to its distinct tread design, the new AGRIMAX V-FLECTO tire also increases efficiency on the road by reducing transport cycles. It offers excellent traction, optimizing operations in the fields and increasing yields per hectare. In addition, AGRIMAX V-FLECTO ensures tangible time savings due to reduced standstill periods, since it is not necessary to change inflation pressures when alternating between field operations and road travel.


Highligths

VF TECHNOLOGY

Higher load capacity




Presently, there is a trend - and this will remain valid in the future - towards always heavier machinery carrying always heavier loads. Unfortunately, this results in an increased risk of soil compaction and crop damages. Against this complex backdrop, the role of the tire becomes fundamental, since it has to sustain considerable weights. AGRIMAX V-FLECTO has been developed right for the purpose of satisfying today and tomorrow's needs. It is the perfect response to the requirement of maximizing load capacity without changing inflation pressure regardless of the speed. While ordinary VF tires carry 40% heavier loads compared to a standard tire of the same size on a wider rim, a NRO marked VF tire is also able to sustain 40% more weight compared to a standard tire of the same size but on the same rim. With AGRIMAX V-FLECTO fitted on your farming equipment, it is hence unnecessary to use a wider rim (referring to the standard rim as to specifications) when carrying up to 40% heavier loads.

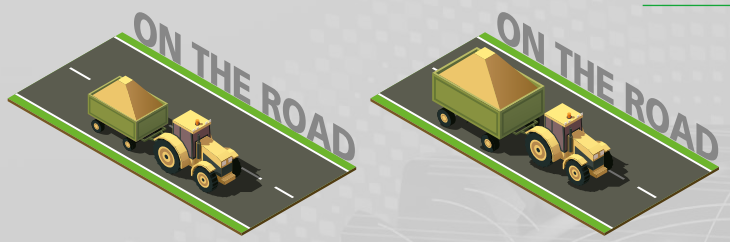

+40% LOAD

Standard tire





-30% pressure with the same load compared to a standard tire.

AGRIMAX V-FLECTO tire




+40% load at the same pressure compared to a standard tire.






Narrow Rim Option **NRO** Technology

Tires designed with VF technology usually require a larger rim to be flitted on, compared to the one needed for a standard tire. Using BKT's brand-new AGRIMAX V-FLECTO, instead, there is no need for purchasing specific rims. BKT, indeed, proves to be able to cope with first-class technologies to best serve final users, since it has already adopted Narrow Rim Option, an innovative solution, according to the recently introduced experimental standard by the European Tire and Rim Technical Organization (E.T.R.T.O.). In order to know which BKT product has the "NRO" mark and before carrying out any fitting operations, it is recommended to carefully read the technical product information available on the website www.bkt-tires.com and to rely only on experienced staff or tire experts for any mounting and dismounting operations.

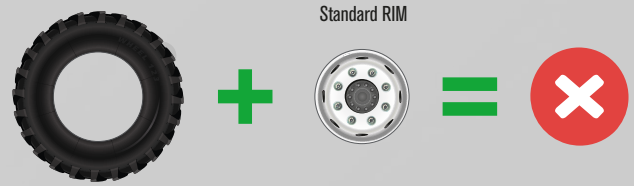






Highligths

VF TECHNOLOGY

Maximum **performance**




AGRIMAX V-FLECTO has been developed and engineered with an extremely strong and robust structure perfectly resisting against all kinds of stress even under the most demanding operating conditions. The elevated fatigue strength makes the new AGRIMAX V-FLECTO tire the perfect solution to cater for the needs of a modern farming business, suitable for being employed in the fields as well as during road transfers.

The specific Bead Protection System featuring a special reinforced bead enables an even more air-tight fitting on the rim in order to ensure best adherence and constant pressure values under any operating condition. Safe driving and effortless steering in addition to stability are the challenges, indeed, that the BKT Research & Development Center faces every day for the purpose of engineering state-of-the-art tires that are highly reliable.




Extremely strong & robust structure
for major resistance against fatigue



Bead Protection System
for a more air-tight fitting on the rim



Reliable **comfort**



As a consequence of increased average dimensions of farming businesses and the land to be tilled as well as longer and more frequent travel, driving comfort is becoming a more and more essential element for today's farmers. In order to reduce operator's fatigue and to ensure an enjoyable ride, BKT has designed the new AGRIMAX V-FLECTO tire with optimized geometrical features, in particular, using new lug angles. The result is enhanced driving comfort both in the fields and on the road due to notably reduced vibrations and a lower noise level.
In addition, the special polyester casing enables the tire to rapidly regain its correct shape even after longer standstills contributing by this way to a more enjoyable ride.

Less vibration





Less noise



Tire markings

READING YOUR TIRE

This section is intended for operators from the agricultural, industrial or earthmoving sectors. It contains useful information about specific Off-Highway tire features as well as some recommendations for maintenance and storage.

The main information about your tire can be found right on the tire. You just need to know how to read it.



1. Sub brand name
2. Pattern name
3. Load & speed index Load, speed, pressure details
4. Weekly serial number
5. Direction of rotation
6. Type of tire
7. Tire size
8. Safety symbol
9. Brand name
10. Safety warning

These are the main parameters for measuring a tire:

OD - OVERALL DIAMETER
This parameter is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

SW - SECTION WIDTH
This parameter indicates the outer sidewall distance without taking into consideration the prominences due to tire code marking. The section width is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

OW - OVERALL WIDTH
This parameter indicates a tire's section width at its largest point including all prominences such as tire code marking, sidewall lettering, tire brand, etc. The overall width is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.


SH - SECTION HEIGHT
This parameter indicates the vertical section of the tire. It is calculated based on the overall diameter less the rim diameter divided by two.

SLR - STATIC LOADED RADIUS
This parameter indicates the vertical distance between the ground and the tire rotation axis. It is measured with the tire inflated at its nominal pressure, properly mounted on its reference rim at maximum load according to the values defined in the load index.

SLW - STATIC LOADED WIDTH
This parameter indicates the outer distance between the tire sidewalls. It is measured with the tire inflated at its nominal pressure, properly mounted on its reference rim at maximum load according to the values defined in the load index.

LOAD INDEX
The load index is a numeric code that defines the tire's maximum loading capacity in kg. For each tire type/size, the loading capacity is always related to a specific inflation pressure as defined by ETRTO standards and manufacturer specifications.

SPEED CODE
The speed code is a symbol that indicates the maximum speed admitted at the given load index, following any other specific conditions defined by the tire manufacturer.

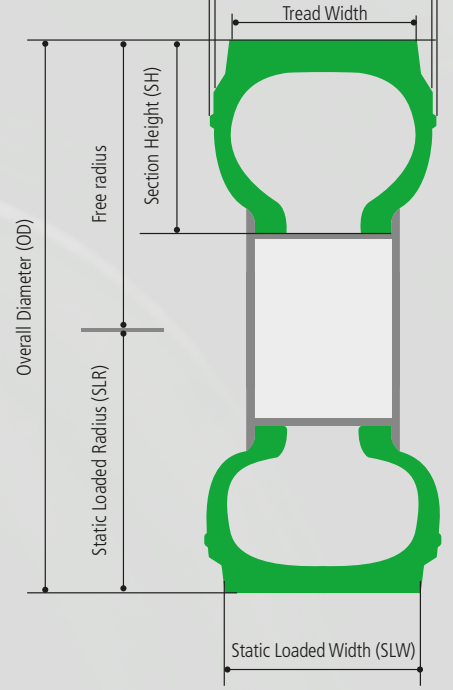



MOUNTING & DISMOUNTING

Please be aware that both mounting and dismounting OFF-Highway tires are hazardous operations. These must be performed by expert and qualified staff members only, using appropriate tools and procedures, as illustrated by the vehicle and machinery manufacterer.

Pressurized air used to inflate tires must always be controlled by means of an air pressure gauge.

Any non-compliance with the correct procedures may result in incorrect fitting of the tire on the rim and on the vehicle. This is a serious risk for the operator's safety.

DISCLAIMER OF LIABILITY:

BKT does not undertake any responsibility in relation to the exactness or correctness of information or illustrations contained in this section. BKT declines any direct or indirect liability for any materal damage or personal injury which might arise directly or incidentally from the use af any informaton contained in this section. For any question in relation to specific operating issues always refer to the manufacturer of your vehicle or equipment.

MOUNTING PREPARATION

Before fitting the tire on the rim, make sure that the following mandatory aspects and requirements are met:

Tire size and features must be suitable for the vehicle and the application to be used.

The rim size to be used must be approved and contained in the BKT Technical Databook prepared following ETRTO Standard Manual; it must be suitable for the tire size.

Mounting and dismounting operations shall be performed by qualified and adequately trained technical staff or professionals only.

Always refer to the instructions and procedures indicated by the rim, tire, and vehicle manufacturers. (Fig_01)

Use appropriate tools and equipment in good condition only. Using a wrong rim can limit the tire performance and cause its damage.

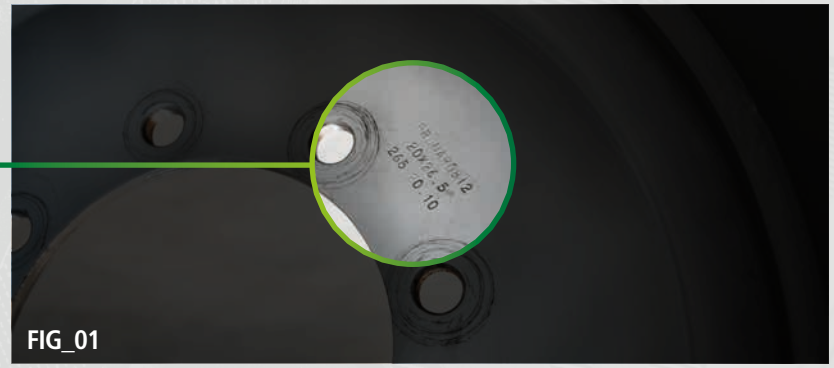


FIG_01

INSPECTION AND CLEANING

Check the rim beforehand; use a metal brush to properly clean the entire surface and check its state. Never use rims with weld joints nor rims that are visibly deformed or damaged. (Fig_02)

The tire bead must be clean and without any elements or damages that might cause an air lack. (Fig_03)

In case of mounting a tire that has already been used, accurately check both the tire's inside and outside for possible damages to be repaired. Do not mount tires with clear signs of strain.

Use a compressor to clean and dry the inner part of the tire. Never use solvents.

Check the tire beads and clean their surface with a dry cloth. Never use solvents.

Only use new tubes (if applicable for the tube type tire) and new air valves (for tubeless tires).

Do not use damaged or broken rims.

The flange must be clean and smooth to ensure uniform adherence. Do not mount rims with worn surfaces.

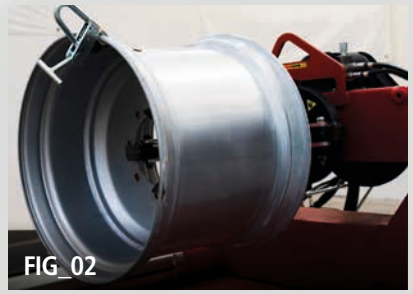


FIG_02

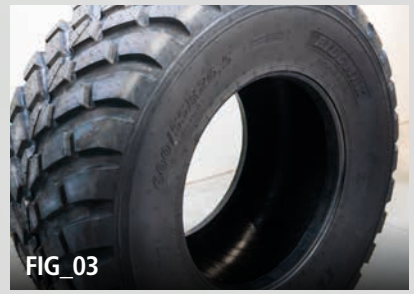


FIG_03

INSPECTION AND VALVE MOUNTING

Place the rim on the mounting device.

Before mounting the tire on the rim, check that the inflation valve functions properly. (fig_04)

It is recommended to always use new valves at every mounting. (Fig_05/06)

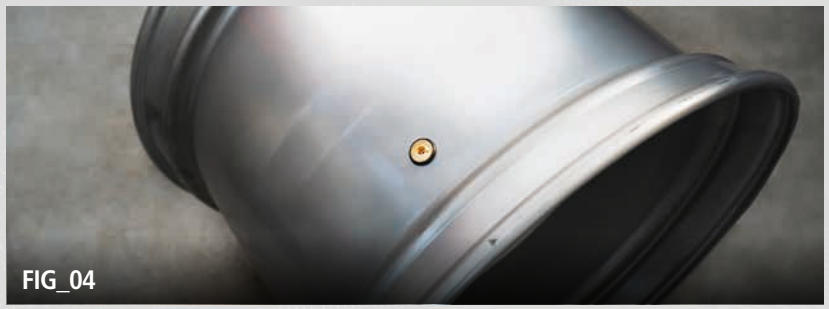
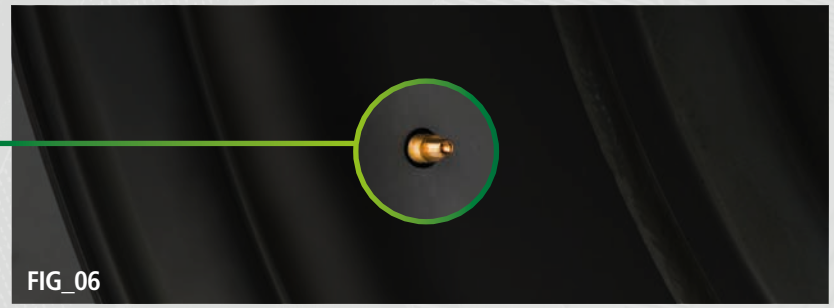

FIG_04


FIG_05


FIG_06

LUBRICATION OF TIRE RIM AND BEAD

Use a soft-bristled brush to spread the lubricant over the surface of the rim flange and beat seat, preferably when mounted on the tire changer. (Fig_07)


Spread the lubricant over the surface of the Tire Bead. (Fig_08/09)

Use specific lubricants for tire mounting only.

Do not use silicone or other solvent-based substances.


FIG_07


FIG_08

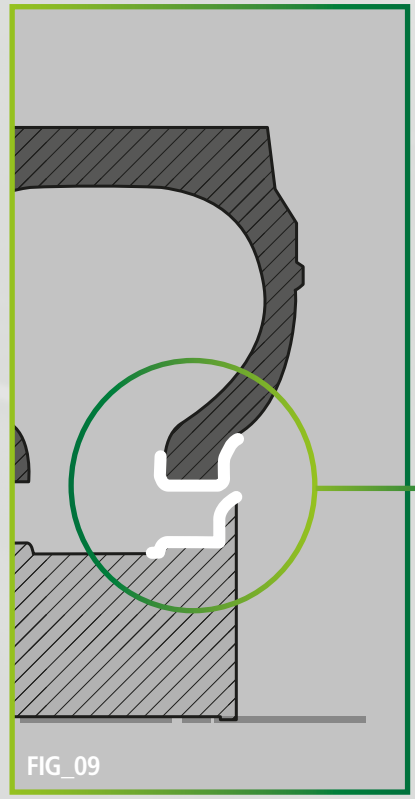
FIG_09

BEAD POSITIONING

Position the pliers in the direction of the valve, so as to ensure that the bead does not pass near the valve. (Fig_10)

Be careful to position the tire following the correct direction of rotation indicated on the sidewall.

Position the internal tire bead (or the first bead) on the pliers set on the rim corresponding to the valve.

Slide the first bead fully into the rim base, assisted by the rotation of the rim on the tire changer. (Fig_11)


FIG_10

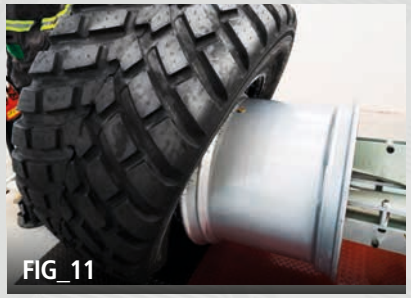

FIG_11


FIG_12

Move the tire so that part of the second bead is "unseated" in regard to the pliers set on the rim. (Fig_12)

Start up the machine and rotate the tire. (Fig_13)

Put the head of the tire changer between the second bead and the rim. This makes it possible to "unseat" the bead over the edge of the rim.

Bead the tire by rotating the rim and (if and when necessary) using a lever.

When the entire second bead has been released from the edge of the rim, extract the head of the tire changer.

Remove the pliers from the rim.

Make sure that the entire bead is correctly fitted within the rim. (Fig_14)

***In the case of agricultural tires, use the inner groove to facilitate the "unseating" of the bead on the edge of the rim.**

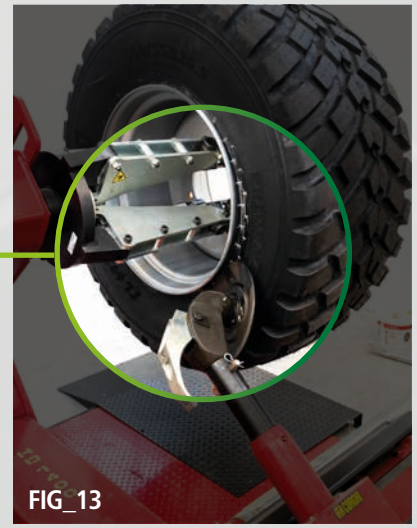

FIG_13


FIG_14

Mounting & dismounting

FINAL CHECK

ATTENTION!
FOLLOW THE CORRECT SAFETY PROCEDURES! NEVER STAND NEXT TO THE SIDEWALLS/BEADS OF THE TIRE WHILE IT IS BEING INFLATED – IF POSSIBLE, USE SAFETY CAGES AND FOLLOW THE ENVISAGED INTERNAL SAFETY PROCEDURES.


Check that both tire beads are correctly positioned on the rim.

Inflate the tire on the rim up to the maximum pressure set out on the sidewall of the tire to seat properly the bead. (Fig_15)

Check that the two beads are correctly mounted on the rim.

Using a specific leak finder, also check that there are no leaks from the valve. (Fig_16)

Once the correct mounting of the tire has been ensured, adjust the tire pressure according to manufacturer recommendations and the intended operating conditions. (Fig_17)

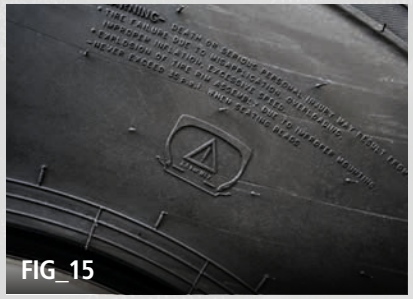
FIG_15

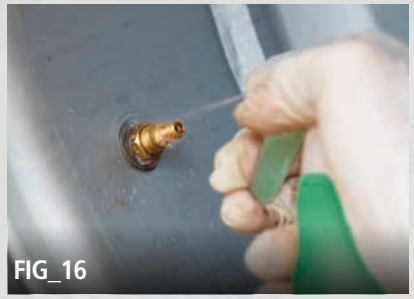

FIG_16


FIG_17

When filling the tire with liquid, it is recommended not to exceed 75% of its volume, in order to leave an air reserve of at least 25% of the tire volume. (Fig_18)

At any rate, it is important to inflate the tire at the pressure recommended by the manufacturer with reference to the loading conditions in order to maintain specific tire features such as elasticity.

In areas with a harsh climate, it is advised to add anti-freezing agents such as calcium chloride or magnesium chloride. It is highly recommended that these operations are carried out by a professional specialist only.

ADDITIONAL RECOMMENDATIONS

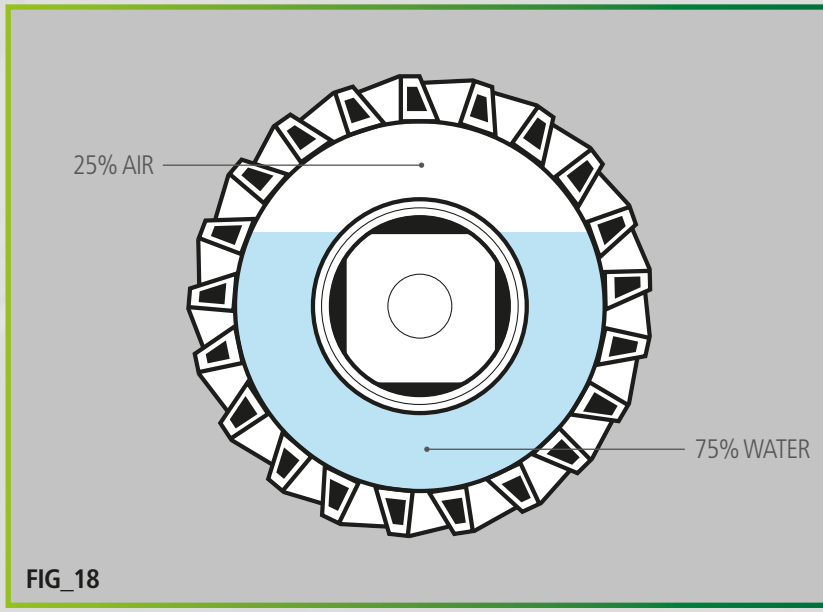


FIG_18

Tire transporation & storage

TIRE TRANSPORTATION

BKT tires are designed for the most differing applications in agriculture and manifold industrial sectors. Many Off-Highway tires are very heavy and difficult to be transported. Wrong transportation of a tire can cause serious damage. When transporting a tire, particular attention must be paid to make sure that neither the bead nor the inner part of the tire are damaged. Even the slightest damage of the bead can cause permanent damage due to air leakage resulting in tire underinflation and possible separation of the tire components.


In order to reduce the risk of damages or problems caused by wrong tire transportation or handling to a minimum, it is highly advised to observe the following recommendations:

Do not lift the tire with a crane hook by leverage on the bead.

Use large fibered straps, rubber slings or specific belts.


Do not use ropes, steel slings or chains.

Use a forklift for transport. The tire is to be lifted under the tread and not on the bead.

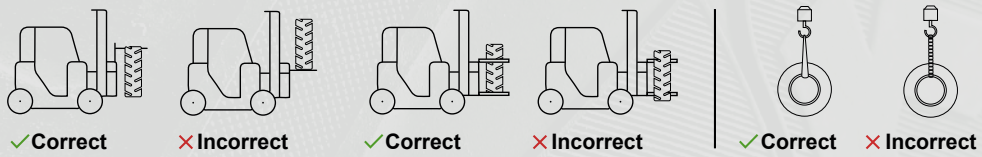

TIRE STORAGE

Whatever your field of application is – agriculture, earthmoving, industry, or else - Off-Highway tires are to be stored in a cool and dry place, away from direct sunlight, electric motors, oils, fuels, resins and other volatile substances in order to avoid any alteration of the chemical-physical features. Should this not be possible, at least protect your tires with a waterproof tarpaulin to avoid contact with ultra-violet rays and bad weather. Tires are to be placed vertically side by side. Do not stack one tire over the other horizontally. Tubes and o-rings must be stocked in their original packing or stored unwrapped on racks or shelves, but never suspended.

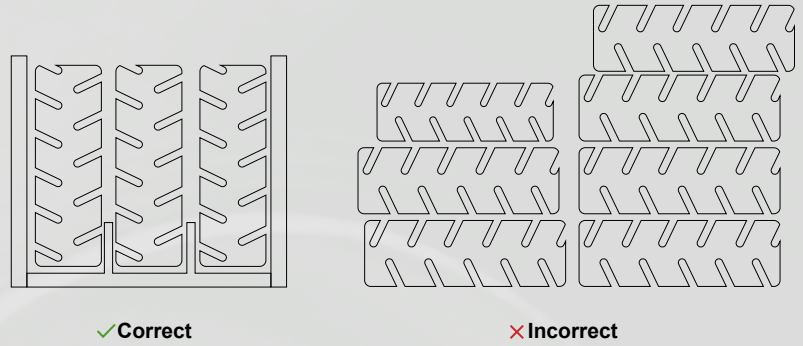

Sustainability

What are end-of-life tires (ELTs)?

ELTs are tires that have reached the end of their product life-cycle. They are worn-out, cracked or bursted tires, which cannot be retreaded and are no longer suitable for their intended purpose. ELT management is an issue of major concern in line with our focus on sustainability. Recovering ELTs leads to reduced waste. Moreover, it is a valuable resource for fuel or other material. As conscientious tire manufacturer, we wish to provide you with some guidelines about handling, storing, recycling, and recovering ELTs.

How to handle and store ELTs?

Store end-of-life tires in a place that is sheltered against rain, since the accumulation of rainwater would favor the breeding of mosquitoes inside the tire.

Likewise, end-of-life tires should not be stored on wetlands, flood plains, in ravines, or on any other steeply graded surface.

Open-air or uncontrolled burning in any place is harmful to the environment and is therefore forbidden by many legislations.

Lightening rods should be placed at a safe distance from tire piles.

Precautions must be taken against deliberate or accidental igniting of tire stock piles in the storage area.

Install an adequate number of fire-fighting devices. In addition, sand and dirt can be used to cover burning tires; whereas water can be used to wet unburned tires preventing ignition.

It is recommended to maintain an adequate buffer zone in the storage area in order to isolate any deliberate or accidental fire.

Provide for an emergency vehicle access road in each tire storage yard and between tire piles.

End-of-life tire composition

A tire is composed of several materials depending on the specific tire type; these include

46-48% rubber


25-28% carbon black

10-12% steel

10-12% oil and vulcanizing agents

3-6% synthetic yarns and textiles

TIRE LIFE-CYCLE

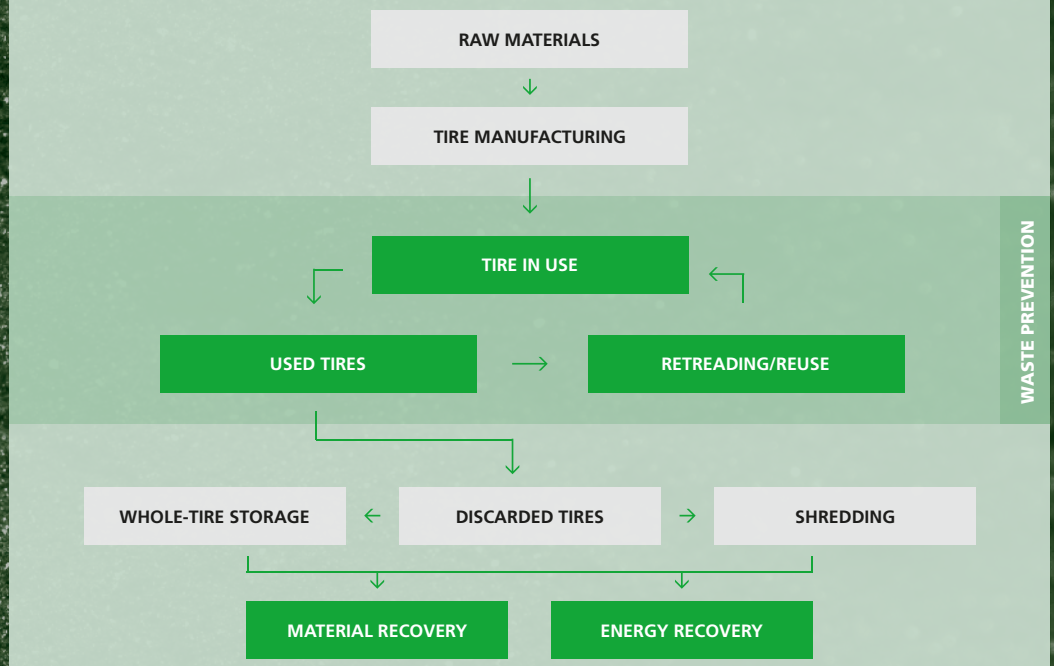

ELT recovery and recycling

When a tire reaches the ELT stage, a proper waste management system is to be applied. It is important that recovery and/or final disposal take place in an environmentally sound manner. ELTs can be destroyed ecologically using the materials obtained for other purposes.

Basically, an ELT can be divided into three product classes:

RUBBER GRANULES

STEEL INSERTS

SYNTHETIC YARN INSERTS AND TEXTILES

Recycling by transforming waste tires into rubber powder





FIBER



RUBBER POWDER



STEEL WIRE



FLOORING AND OTHER LOW-END RUBBER PRODUCTS



RECYCLED RUBBER SHEETS



(PARTIAL) SUBSTITUTION FOR RAW RUBBER PRODUCTS

Recycling process - pyrolysis

ELTs are separated into mainly oil, carbon black, hydrocarbon, and steel in special pyrolysis plants by means of thermal and chemical decomposition. Components can then be reused or recycled.

For what purposes can end-of-life tires be used?

ELTs can be a low-cost source of fuel when located near a major fuel consumer, such as a power plant or cement factory. They can also be readily processed for a diverse range of construction projects.

ENERGY RECOVERY

- Alternative fuel/oil is mainly used in cement kilns and also in thermal power stations, pulp and paper mills.
- Derived Fuel (TDF) is a source of low-cost fuel for power generation or can be used as heat source for boiler co-generation.

MATERIAL RECOVERY

- Rubber can be reused in the tire industry as crumb.
- Rubber can also be used for low-end rubber products, flooring etc.
- Shredded fabric can be recycled for solid tires.
- ELTs can be processed for several types of construction projects.
- Bead wires (steel wire) can be smelted to obtain recycled steel.

BKT

GROWING TOGETHER

PROUD SPONSOR OF:

Serie BKT

BKT OFFICIAL GLOBAL PARTNER | LaLiga

LIGUE 2 BKT

MONSTER JAM | BKT GROWING TOGETHER

OFFICIAL TIRE OF MONSTER JAM®

BKT GROWING TOGETHER | Euroleague Basketball

PREMIUM PARTNER

KFC BBL | BKT GROWING TOGETHER

OFFICIAL OFF-HIGHWAY
TIRE PARTNER OF THE KFC BBL

SANKAR CEMENT TNPL

POWERED BY NIPPON PAINT | STRENGTH PARTNER sharon

OFFICIAL PARTNER OF

SIX T-20 LEAGUE TEAMS

PRO KABADDI

TEAMS





Corporate Office

Balkrishna Industries Ltd.
BKT HOUSE, C/15, Trade World, Kamala Mills Compound, Senapati Bapat Marg, Lower Parel, Mumbai - 400013, India
Tel: (+91) 22-6666 3800 - Fax: (+91) 22-6666 3898/99 - e-mail: info@bkt-tires.com - bkt-tires.com

BKT Europe srl

Viale Della Repubblica,133
20831 Seregno (MB), Italy
Tel: (+39) 0362 33 03 28
(+39) 0362 32 51 07
Fax: (+39) 0362 23 24 72

BKT USA Inc.

202 Montrose West Ave. Suite 240
Copley, Ohio 44321
Tel: (+1) 330 836 1090
Fax: (+1) 330 836 1091
Toll Free: (+1) 888 660 0662

BKT Tires (CANADA) Inc.

55 York Street, Suite 401
Toronto, Ontario M5J 1R7, Canada
Tel: AG/IND (+1) 905 641 5636
OTR (+1) 780 888 5667
Fax: (+1) 416 229 1711



bkt-tires.com

All images, texts and graphics contained in this brochure are the copyright of BKT. Permission is granted to print hard copies of this material. Any other form of reproduction, electronic or otherwise, as well as the application of any changes, partially or entirely, to images, texts, graphs and data is strictly prohibited without prior written permission by BKT. Balkrishna Industries Limited (BKT) reserves itself the right to alter any details contained in the publication without prior notice.

EN / 01-2020